

INDOOR TECHNICAL LIGHTING

CATALOGUE
SEPTEMBER 2024



CREST
SERIES



I L L U M I N A T I O N T H A T I N S P I R E S



INDEX

06-08	About Litomatic
09	About Crest Series
10	Litomatic's Presence
11-17	Downlight
18	Adjustable Downlight
19	Slim Surface Downlight
20	Surface Downlight
21-34	Spotlight
35	Trimless Spotlight
36	Gypsum Frames
37	MR-16 Module
38-39	Wallwasher
40-41	360° Surface Spotlight
42	Surface Spotlight
43	Slim Surface Spotlight
44	Zoomlight

INDEX

45	Spotlight
46-47	Laserblade
48-50	Tracklight
51	Track Channel
52-55	Mini Spotlight
56	Mini Footlight
57	Beat (Strip Light)
58	Beat (Strip Light CCT)
59	Wallgrazer
60	Sky Line
61	Silicon Flex
62	Beat (Pencil & ECO SMPs)
63	Beat (Slim SMPs)
64	Sensor
65	Remote & Gateway
66	Our Clients



About Litomatic

Established in 1992 as Kardhar Electric Co., Litomatic has grown into a leading name in the lighting industry. With Raj Kothari joining in 2011 and supported by Ashish Kothari's expertise, Litomatic expanded by importing lighting goods from China in 2013. Formally founded in 2016, Litomatic swiftly pioneered remote-controlled tunable and dimmable lighting in India, ensuring superior products through extensive testing in Udaipur. Litomatic also boasts a well-equipped in-house lab that supports its manufacturing processes, enhancing reliability and delivering complete lighting solutions without needing external consultants or service providers. Participation in key exhibitions from 2017 to 2019 bolstered its reputation, leading to a state-of-the-art manufacturing facility.

Guided by in-house R&D, Litomatic's advanced LED and COB technology ensures precision and efficiency. The brand's commitment to the 'Make in India' initiative and over 300+ dies and molds reflect its dedication to innovation and quality. With a network of over 300 partners across 110+ cities, Litomatic continues to revolutionise spaces with exceptional yet economical lighting solutions. Litomatic stands as a beacon of excellence, poised to illuminate the future.

CERTIFIED

IS- 15885
(Part 2/Sec 13) : 2012



R - 84003603
www.bis.gov.in

IS- 10322
(Part 5/Sec 1) : 2012



R - 84004740
www.bis.gov.in

IS- 10322
(Part 5/Sec 2) : 2012



R - 84004669
www.bis.gov.in

IS- 10322
(Part 5/Sec 7) : 2017



R - 84004685
www.bis.gov.in





LITOMATIC R&D

Lighting Innovations - Product Development & Design

LITOMATIC's expertise shines in luminaire engineering, blending aesthetics and functionality for unrivalled brilliance. Our meticulous approach encompasses the precise selection of light sources, materials with optimal heat sink capacity, and cutting-edge technologies. With a keen focus on achieving the highest standard of lighting emission, each functional prototype serves as a catalyst for refining elements and orchestrating a seamless creative progression. Experience the alchemy of innovation as we illuminate the path to luminaire excellence.

Factory Innovations - Crafting Excellence

At Litomatic, we are dedicated to delivering products that embody contemporary design through exceptional craftsmanship. Our cautious material selection, accurate finishing, and continuous research and development ensure durable and reliable products that elevate the global market. Each creation harmoniously fuses structure, light, and architecture, challenging artistic boundaries.

Machining Center - Precision Meets Artistry

Our cutting-edge machining centers enable us to achieve uncompromising quality, from grinding to precise processing. These high-precision machines play an indispensable role in crafting our finest products.

Exquisite Workmanship - Quality and Beauty

Litomatic lamps are renowned for their superior quality and meticulous manufacturing. From mold manufacturing to die casting, we passionately uphold the highest standards of craftsmanship.

Seamless Assembly - Precision and Safety

Our skilled staff follows strict procedures on electrical and mechanical assembly lines, guaranteeing compliance with regulations. We prioritize electrical safety checks, ensuring the utmost reliability of our luminaires.

Packing and Delivery - Global Excellence

Every Litomatic product undergoes painstaking preparation and packaging, ready to be shipped worldwide. As a trusted brand, Litomatic delivers excellence to customers across numerous countries and regions.





CRI Technology for Color Accuracy

Color accuracy is crucial in lighting, and the Color Rendering Index (CRI) helps assess how faithfully a light source reveals colors compared to natural light. LED lighting, with its different color temperatures and light variations, directly affects color accuracy. Opting for higher CRI-rated LEDs ensures more accurate color representation. Experience vibrant and true-to-life colors with Litomatic's advanced CRI technology.

Glare-Free LED Lighting

At Litomatic, we prioritize the ultimate lighting experience with our precision-engineered anti-glare technology. Through meticulous control and innovative design, we ensure secondary optical refraction curves and superior electroplate treatment, resulting in flicker-free, high-performance lighting even in low-light conditions. With a generous beam angle of up to 40°, our luminaires create a serene and comfortable lighting atmosphere, allowing you to enjoy the illumination without any distracting glare.

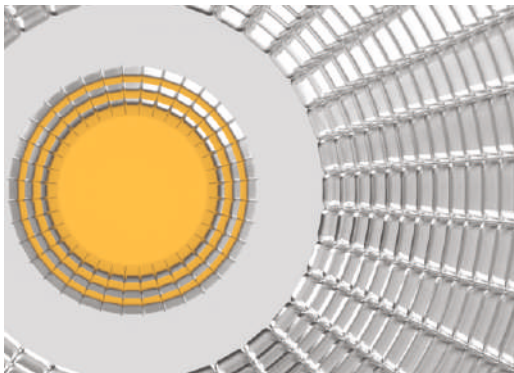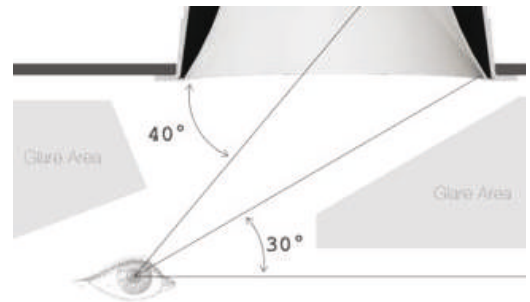

LED Chips Illuminating Innovation

LED chips, the heart of modern lighting, revolutionize illumination with advanced technology. These compact semiconductor devices drive efficiency, superior color rendering, and remarkable longevity. Powering smart light bulbs and energy-saving solutions, LED chips redefine lighting experiences. Illuminate your space with efficiency and brilliance using Litomatic's high-quality LED chips.

Brilliant COB Lighting

Experience flawless lighting with Litomatic's cutting-edge Chip-On-Board (COB) technology. Our COB fixtures deliver even, natural light without double images, creating a clean and dimensionally rich lighting experience. Say goodbye to blurry edges and embrace Litomatic's superior COB lighting for captivating illumination.



ABOUT CREST SERIES




CREST
SERIES

Design-Forward Lighting For Vibrant Spaces

Litomatic's Crest Lighting Series—a refined selection crafted to redefine commercial environments with exceptional elegance and innovation. This series transcends conventional design standards, offering a sophisticated aesthetic that enhances architectural vision. Equipped with premium drivers, each fixture in the Crest Series offers superior energy efficiency, flicker free illumination, and an extended lifespan, ensuring consistent performance and reliability. These products also feature glare-reduction technology, enhancing visual comfort and usability. The Crest Series seamlessly integrates form and function, elevating the ambience of any space while supporting sustainability and durability.



RF 2.4G  + BLE 

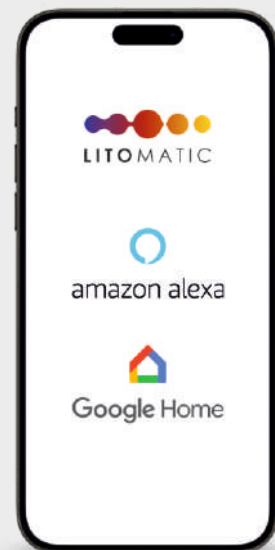

1st
PIONEER
with this CONCEPT
SINCE **2016**



OUR PRESENCE

110+ Cities 300+ Dealers Across India

Agra, Ahmedabad, Ajmer, Akola, Ambikapur, Amravati, Amritsar, Anand, Aurangabad, Balgaum, Banswara, Bareilly, Barmer, Barnala, Baroda, Begur, Begusarai, Bengaluru, Bharuch, Bhatinda, Bhavnagar, Bhawanipatna, Bhilai, Bhilwara, Bhopal, Bhubaneswar, Bikaner, Bilaspur, Chandigarh, Chennai, Cochin, Coimbatore, Dehradun, Dhule, Durg, Ernakulam, Faridabad, Fatehabad, Firozabad, Gandhidham, Ghaziabad, Goa, Gorakhpur, Gurgaon, Guwahati, Hanumangarh, Hazaribagh, Hisar, Hubballi, Hyderabad, Indore, Jabalpur, Jaipur, Jalgaon, Jamnagar, Jind, Jodhpur, Jalandhar, Kannur, Karnal, Kendujhar, Khanna, Kishangarh, Kolhapur, Kolkata, Kota, Kottayam, Kozhikode, Kutch, Lucknow, Ludhiana, Madurai, Malur, Mangaluru, Mathura, Meerut, Moga, Morbi, Mumbai, Mysore, Nabha, Nagpur, Nanded, Nashik, Navi Mumbai, New Delhi, Noida, Palakkad, Panipat, Patiala, Patna, Prayagraj, Pune, Raipur, Rajkot, Rajsamand, Ranchi, Ratlam, Salem, Satara, Secunderabad, Sikar, Siliguri, Siwan, Solapur, Surat, Talegaon, Thane, Thrissur, Tiruppur, Trichy, Trivandrum, Udaipur, Vadodara, Visakhapatnam.

DIVINE

DOWNLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	12w	18w	24w
Dimension	:	120X50mm	155X55mm	175X55mm
Cut Out	:	110mm	145mm	165mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	110°		
CRI	:	80		
Material	:	Aluminium		
LED Brand	:	Bridgelux/Lumware or Equivalent		

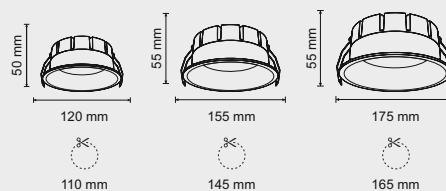

Upto 4KV
Surge





Flicker Free



Energy Saving

DIVINE

DOWNLIGHT

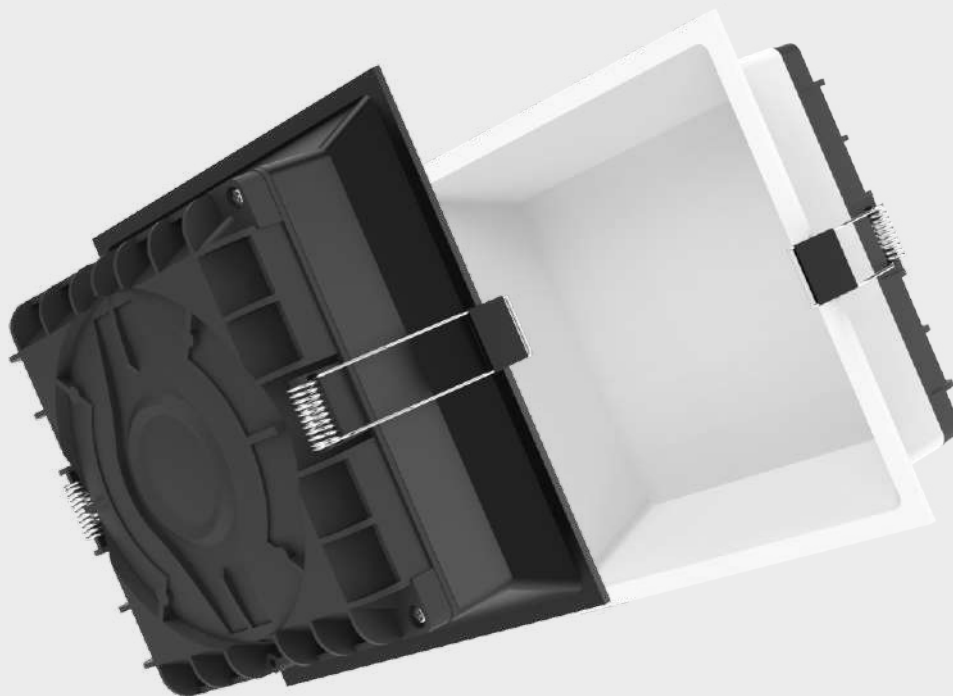

Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	12w	18w
Dimension	:	110x110x50mm	145x145x55mm
Cut Out	:	100X100mm	135X135mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	110°	
CRI	:	80	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	



Upto 4KV
Surge



Flicker Free



Energy Saving

GRACE

DOWNLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	12w	18w	24w
Dimension	:	90X56mm	100X56mm	125X56mm
Cut Out	:	85mm	95mm	115mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	100°		
CRI	:	80		
Material	:	Aluminium		
LED Brand	:	Bridgelux/Lumware or Equivalent		

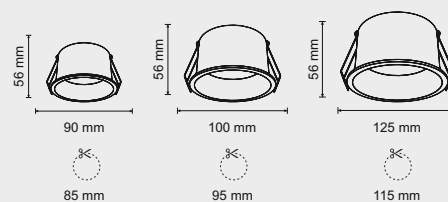

Upto 4KV
Surge



Flicker Free



Energy Saving

AQUA

DOWNLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	12w	18w	24w
Dimension	:	110X110X22mm	130X130X22mm	160X160X22mm
Cut Out	:	100X100mm	120X120mm	145X145mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	120°		
CRI	:	80		
Material	:	Aluminium		
LED Brand	:	Bridgelux/Lumware or Equivalent		

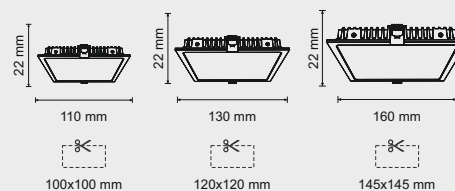

Upto 4KV
Surge



Flicker Free



Energy Saving

AQUA

DOWNLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	12w	18w	24w
Dimension	:	110X22mm	130X22mm	160X22mm
Cut Out	:	100mm	120mm	145mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	120°		
CRI	:	80		
Material	:	Aluminium		
LED Brand	:	Bridgelux/Lumware or Equivalent		

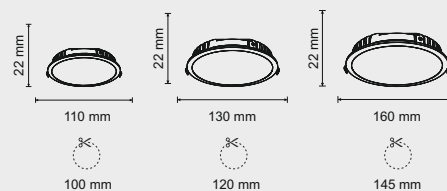

Upto 4KV
Surge




Flicker Free



Energy Saving

DELIGHT

DOWNLIGHT

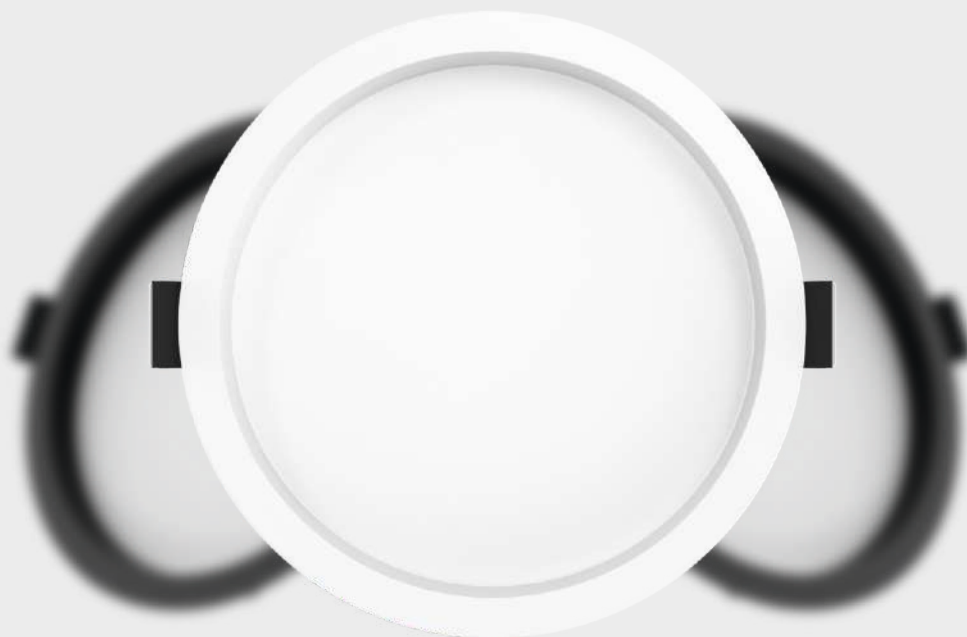

Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	6w	12w	18w
Dimension	:	85X30mm	110X30mm	155X30mm
Cut Out	:	75mm	100mm	145mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	110°		
CRI	:	80		
Material	:	Aluminium		
LED Brand	:	Bridgelux/Lumware or Equivalent		

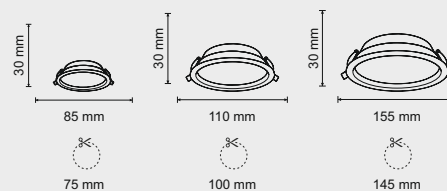

Upto 4KV
Surge



Flicker Free



Energy Saving

ACCORD

DOWNLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


BK

WH

Body Color Available

NEW
ARRIVAL

Watt	:	12w	18w	24w
Dimension	:	115X30mm	155X30mm	180X30mm
Cut Out	:	105mm	145mm	170mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	110°		
CRI	:	80		
Material	:	Aluminium		
LED Brand	:	Bridgelux/Lumware or Equivalent		

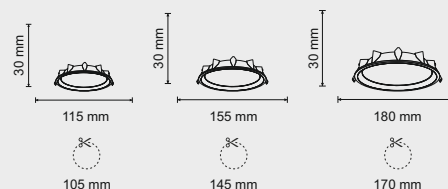

Upto 4KV
Surge




Flicker Free



Energy Saving

FISCO

ADJUSTABLE DOWNLIGHT

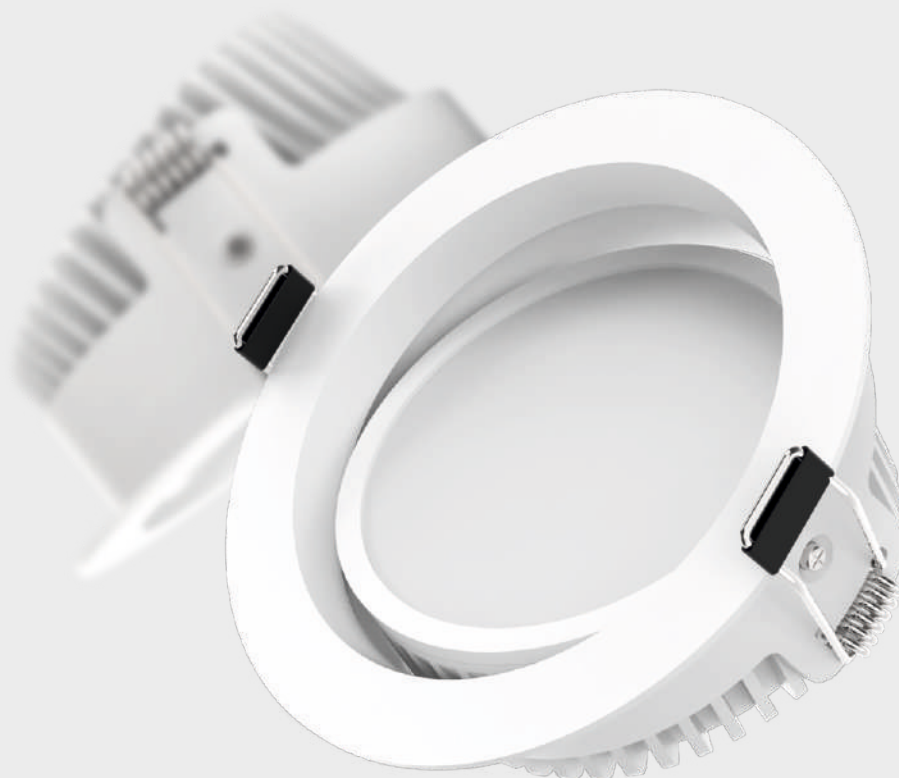

Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	12w
Dimension	:	110X45mm(55mm After Moving)
Cut Out	:	95mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable) Note : 2700/3500/5000k (available on request)
Beam Angle	:	110°
CRI	:	80
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent



Upto 4KV
Surge




Flicker Free



Energy Saving

WISDOM

SLIM SURFACE DOWNLIGHT

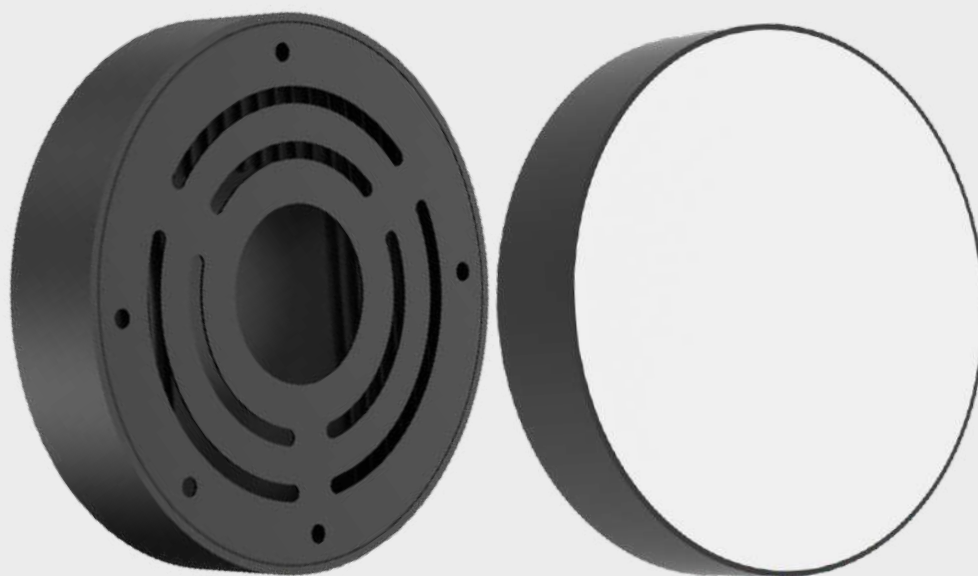

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


BK

WH

Body Color Available

NEW
ARRIVAL

Watt	:	12w	18w	24w
Dimension	:	100X36mm	125X38mm	150X38mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	120°		
CRI	:	80		
Material	:	Aluminium		
LED Brand	:	Bridgelux/Lumware or Equivalent		



Upto 4KV
Surge





Flicker Free



Energy Saving

IGNITE

SURFACE DOWNLIGHT

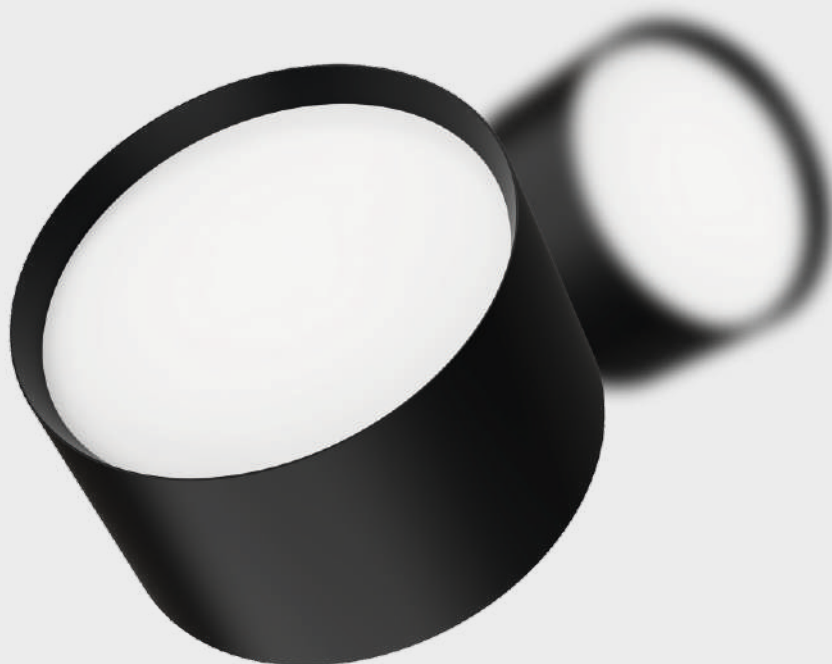

Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	8w	15w	22w
Dimension	:	90X75mm	110X75mm	125X75mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	110°		
CRI	:	80		
Material	:	Aluminium		
LED Brand	:	Bridgelux/Lumware or Equivalent		



Upto 4KV
Surge



Flicker Free



Energy Saving

CRUISE

SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	5-7w	12-15w	20-25w	30-36w
Dimension	:	70X65mm	85X75mm	95X90mm	115X105mm
Cut Out	:	60mm	75mm	85mm	105mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)			
		Note : 2700/3500/5000k (available on request)			
Beam Angle	:	15/24/36/55°	15/24/36/55°	24/36/55°	24/36/55°
CRI	:	80/90 (available on request)			
Material	:	Aluminium			
LED Brand	:	Bridgelux/Lumware or Equivalent			

65 mm



70 mm

75 mm



85 mm

90 mm




95 mm

105 mm



115 mm

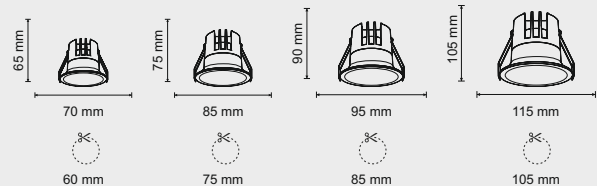

Upto 4KV
Surge



Flicker Free



Anti Glare



Energy Saving

DUKE

SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


BK

WH

Body Color Available

Watt	:	5-7w	12-15w	20-25w
Dimension	:	70X58mm	85X65mm	98X84mm
Cut Out	:	60mm	75mm	85mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	15/24/36/55°	15/24/36/55°	24/36/55°
CRI	:	80/90 (available on request)		
Material	:	Aluminium		
LED Brand	:	Bridgelux/Lumware or Equivalent		



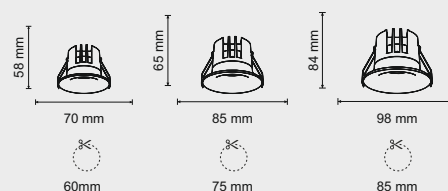

Upto 4KV
Surge



Flicker Free



Anti Glare



Energy Saving

EXOTIC

SPOTLIGHT



Available In : Gun Metal, Chrome, Rose Gold, Gold, Titanium Black



Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	5-7w	12-15w	20-25w
Dimension	:	75X70mm	85X80mm	100X95mm
Cut Out	:	65mm	75mm	90mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	15/24/36/55°	15/24/36/55°	24/36/55°
CRI	:	80/90 (available on request)		
Material	:	Aluminium		
LED Brand	:	Bridgelux/Lumware or Equivalent		

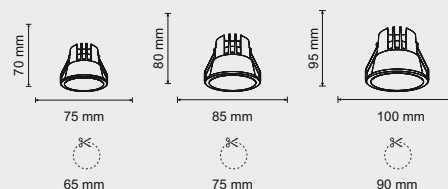

Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR



Energy Saving

CURVE

ADJUSTABLE SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	5-7w	12-15w	20-25w	30-36w
Dimension	:	78X65mm	88X75mm	100X86mm	120X101mm
Cut Out	:	72mm	80mm	93mm	113mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)			
		Note : 2700/3500/5000k (available on request)			
Beam Angle	:	15/24/36/55°	15/24/36/55°	24/36/55°	24/36/55°
CRI	:	80/90 (available on request)			
Material	:	Aluminium			
LED Brand	:	Bridgelux/Lumware or Equivalent			

65 mm



78 mm

75 mm



88 mm

86 mm




100 mm

101 mm



120 mm

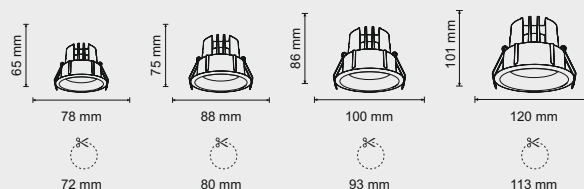

Upto 4KV
Surge



Flicker Free



Anti Glare



Energy Saving

BLAST

SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT


BK

WH

Body Color Available

Watt	:	5-7w	12-15w	20-25w	30-36w
Dimension	:	60X48mm	70X51mm	80X65mm	105X77mm
Cut Out	:	52mm	60mm	70mm	90mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)			
		Note : 2700/3500/5000k (available on request)			
Beam Angle	:	15/24/36/55°	15/24/36/55°	24/36/55°	24/36/55°
CRI	:	80/90 (available on request)			
Material	:	Aluminium			
LED Brand	:	Bridgelux/Lumware or Equivalent			



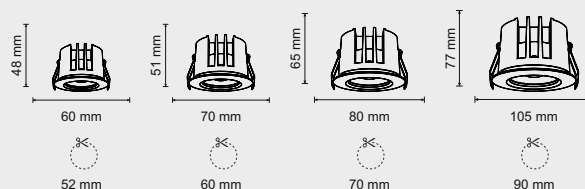

Upto 4KV
Surge



Flicker Free



Anti Glare




Energy Saving

HECTOR

SPOTLIGHT


Watt	:	12-15w
Dimension	:	90X95mm
Cut Out	:	80mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	15/24/36/55°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent



HARRIER

SPOTLIGHT

Watt	:	12-15w
Dimension	:	85X85mm
Cut Out	:	75mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	15/24/36/55°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

BK

WH

Body Color Available



Upto 4KV
Surge



Flicker Free



Anti Glare



Energy Saving

COMPASS

SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

BK

WH


Body Color Available

Watt	:	5-7w	12-15w	20-25w
Dimension	:	60X80mm	70X95mm	85X118mm
Cut Out	:	53mm	62mm	75mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	15/24/36/55°	15/24/36/55°	24/36/55°
CRI	:	80/90 (available on request)		
Material	:	Aluminium		
LED Brand	:	Bridgelux/Lumware or Equivalent		



80 mm

60 mm

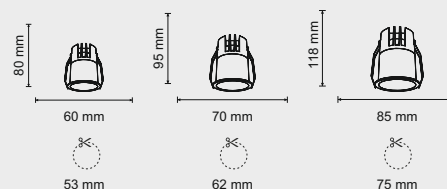

Upto 4KV
Surge



Flicker Free




Anti Glare



Energy Saving

TRUMP

SPOTLIGHT

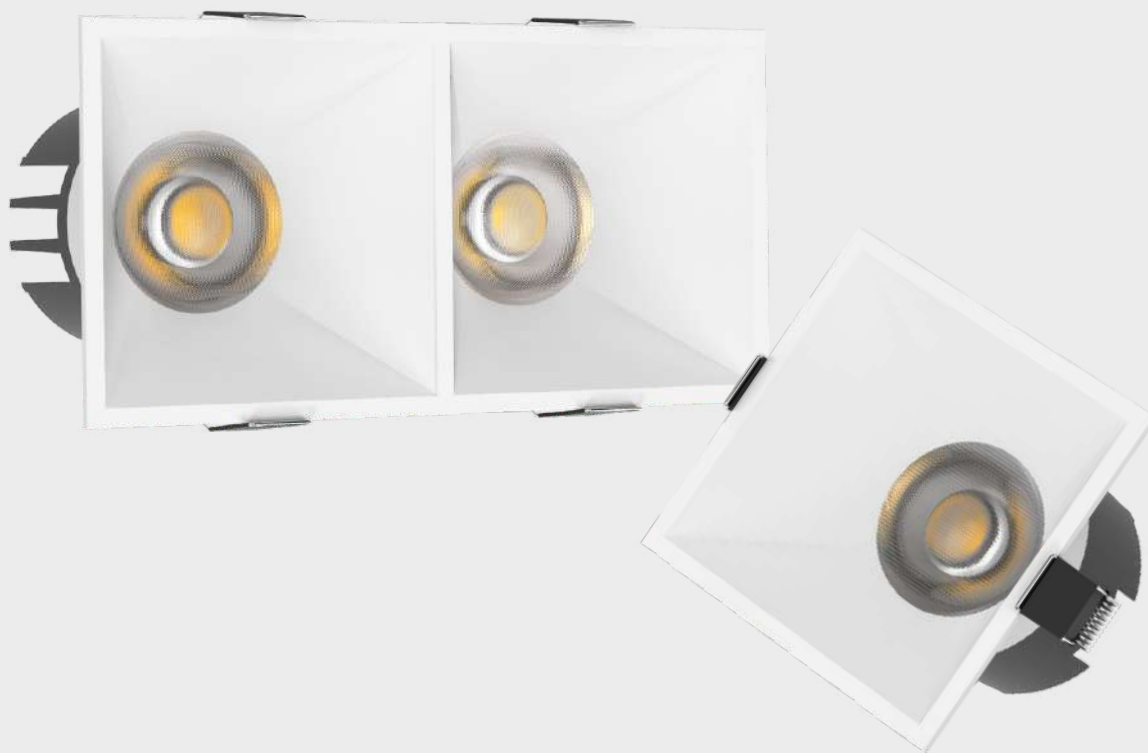

Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	12-15w	2X12-15w
Dimension	:	83X83X83mm	162X83X83mm
Cut Out	:	77X77mm	155X77mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	15/24/36/55°	15/24/36/55°
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	



Upto 4KV
Surge



Flicker Free




Anti Glare



Energy Saving

PASSION

SPOTLIGHT

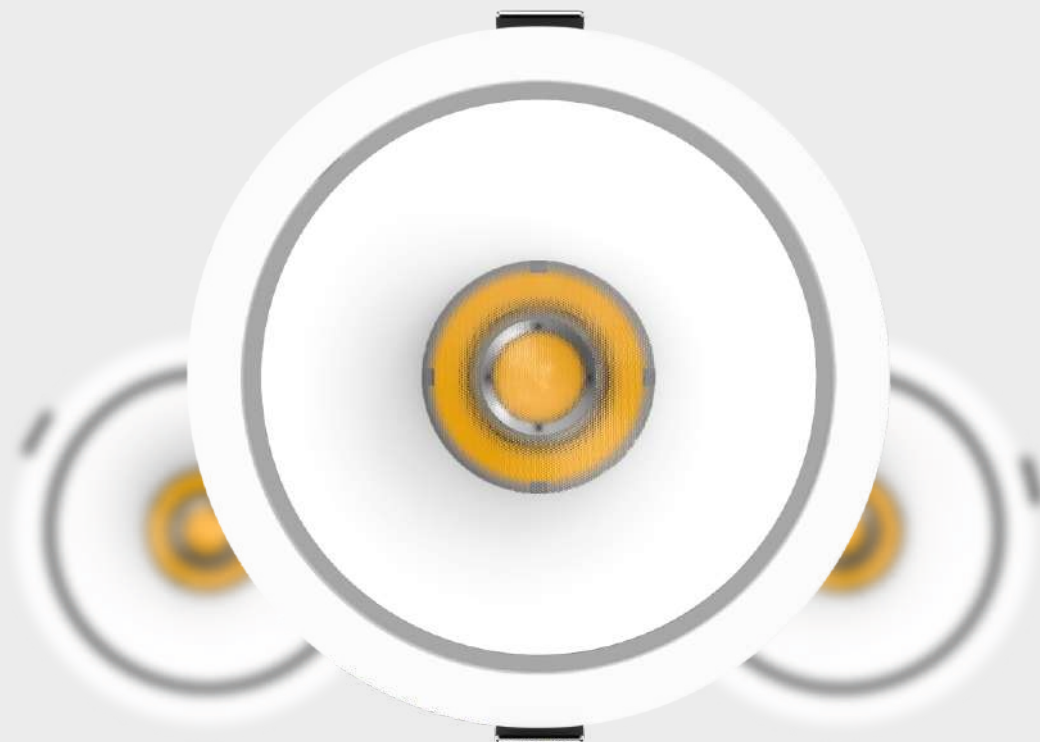

Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	5-7w	12-15w
Dimension	:	80X54mm	108X70mm
Cut Out	:	68mm	95mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	15/24/36/55°	15/24/36/55°
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	



Upto 4KV
Surge



Flicker Free



Anti Glare




Energy Saving

ARC

SPOTLIGHT


Watt	:	12-15w
Dimension	:	72X75mm
Cut Out	:	65mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	15/24/36/55°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent



EYE

SPOTLIGHT

Watt	:	5-7w
Dimension	:	65X60mm
Cut Out	:	55mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	15/24/36/55°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

BK

WH

Body Color Available



Upto 4KV
Surge



Flicker Free




Anti Glare



Energy Saving

STYLO

LOW DEPTH ADJUSTABLE SPOTLIGHT

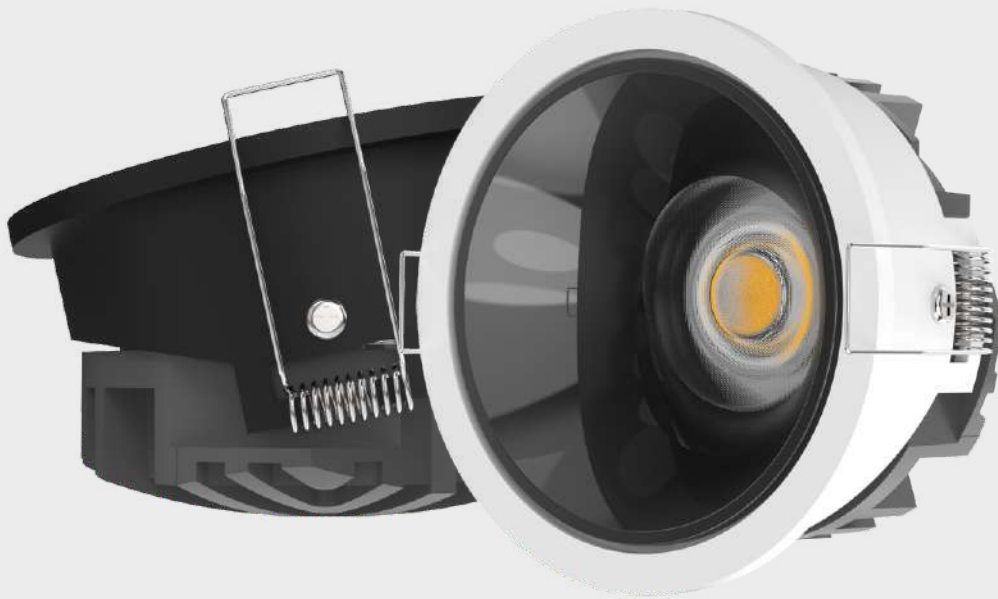

Dimming & Tuning Technology




RF 2.4G + BLE

TRIAC/PHASE CUT

Watt	:	12w
Dimension	:	85X49mm
Cut Out	:	75mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)
Note : 2700/3500/5000k (available on request)		
Beam Angle	:	38°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent

NEW
ARRIVAL



Upto 4KV
Surge



Flicker Free



Anti Glare



Energy Saving

DUSTER

LOW DEPTH SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


BK

WH

Body Color Available

NEW
ARRIVAL

Watt	:	7w	12w
Dimension	:	63X28mm	73X28mm
Cut Out	:	55mm	65mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	36/60°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	



Upto 4KV
Surge



Flicker Free



Anti Glare



Energy Saving

BOOST

SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	5w	7-12w
Dimension	:	40X58mm	60X88mm
Cut Out	:	35mm	52mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	24/36°	24/36/55°
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	



Upto 4KV
Surge



Flicker Free




Anti Glare



Energy Saving

IRIS

360° ADJUSTABLE SPOTLIGHT

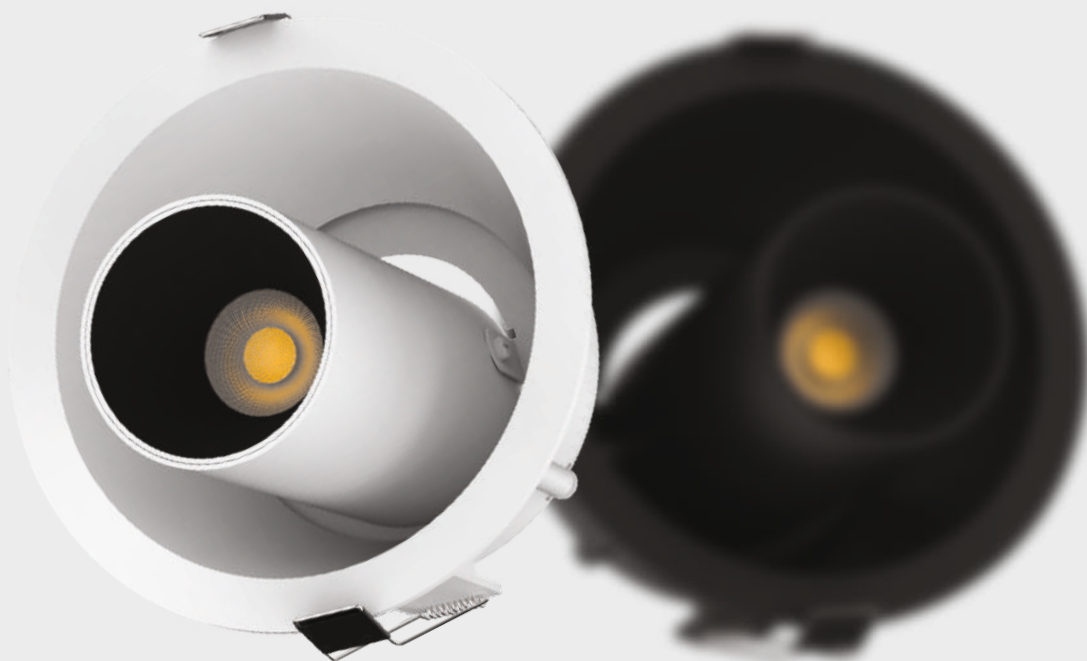

Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	7-12w
Dimension	:	90X92mm
Cut Out	:	82mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)
Note : 2700/3500/5000k (available on request)		
Beam Angle	:	24/36/55°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent



Upto 4KV
Surge



Flicker Free



Anti Glare



Energy Saving

TWIST

TRIMLESS SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


BK

WH

Body Color Available

NEW
ARRIVAL

Watt	:	12-15w
Dimension	:	82X80mm
Cut Out	:	82mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)
Note : 2700/3500/5000k (available on request)		
Beam Angle	:	15/24/36/55°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent



Upto 4KV
Surge



Flicker Free



Anti Glare



Energy Saving

GEO

SPOT FRAME

Model	:	MR-16 Gypsum Frame
Dimension	:	130X45mm
Cut Out	:	130X130mm
Material	:	Gypsum



NEW
ARRIVAL



FLY

SPOT FRAME

Model	:	MR-16 Gypsum Frame
Dimension	:	120X120X44mm
Cut Out	:	120X120mm
Material	:	Gypsum

NEW
ARRIVAL



WH Body Color Available

BINGE

WALLWASHER FRAME

Model	:	MR-16 Gypsum Frame
Dimension	:	120X120X65mm
Cut Out	:	120X120mm
Material	:	Gypsum



Upto 4KV
Surge



Flicker Free



Anti Glare



Energy Saving

VISION

MR-16 MODULE



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


BK

WH

Body Color Available

NEW
ARRIVAL

Watt	:	12-15w
Dimension	:	49.8X75mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	15/24/36/55°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent



Upto 4KV
Surge



Flicker Free



Anti Glare



Energy Saving

GLOW

WALLWASHER



Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	12w	20w
Dimension	:	85X70mm	108X86mm
Cut Out	:	70mm	90mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	60°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	



Upto 4KV
Surge



Flicker Free




Anti Glare



Energy Saving

FLASH

WALLWASHER

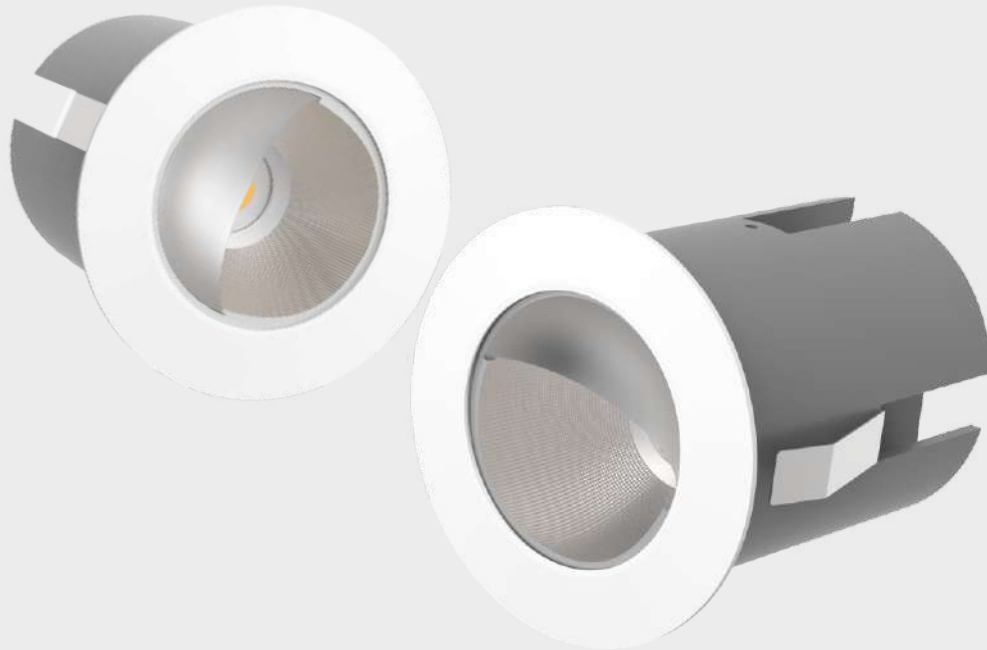

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


BK

WH

Body Color Available

NEW
ARRIVAL

Watt	:	12w
Dimension	:	64X71mm
Cut Out	:	53mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	Asymmetric Wallwasher
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent



Upto 4KV
Surge



Flicker Free




Anti Glare



Energy Saving

DESIRE

SURFACE SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	7w	12w	20w
Dimension	:	56X75mm	65X85mm	70X95mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	15/24/36/55°	15/24/36/55°	24/36/55°
CRI	:	80/90 (available on request)		
Material	:	Aluminium		
LED Brand	:	Bridgelux/Lumware or Equivalent		



Upto 4KV
Surge



Flicker Free



Anti Glare



Energy Saving

CORE

360° ADJUSTABLE SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	12w	12w
Dimension	:	54X70X94mm	54X70X95mm
Cut Out	:	52mm	-
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	24/36°	
OD	:	60mm	63mm
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	



Upto 4KV
Surge



Flicker Free



Anti Glare



Energy Saving

GLINT

360° SURFACE ADJUSTABLE SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	12w
Dimension	:	50X170mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable) Note : 2700/3500/5000k (available on request)
Beam Angle	:	38°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent



Upto 4KV
Surge



Flicker Free



Anti Glare



Energy Saving

GLIDE

SLIM SURFACE SPOTLIGHT




Dimming & Tuning Technology



RF 2.4G + BLE + TRIAC/PHASE CUT

BK WH Body Color Available

Watt	:	3-5w
CCT (K)	:	2200k/3000k/4000k/6500k
Dimension	:	60X16mm
Beam Angle	:	110°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Crome



Upto 4KV
Surge



Flicker Free



Anti Glare



Energy Saving



IP44
IP Rating

WONDER

ZOOMLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	12w	20-30w	36w
Dimension	:	113X92mm	138X120mm	165X160mm
Cut Out	:	100mm	125mm	150mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	38°		
CRI	:	80/90 (available on request)		
Material	:	Aluminium		
LED Brand	:	Bridgelux/Lumware or Equivalent		

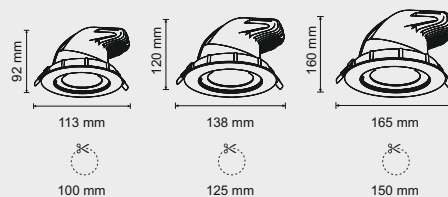

Upto 4KV
Surge



Flicker Free



Anti Glare



Energy Saving

POLO

SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	7w	12w	20w	30w	36w
Dimension	:	86X32mm	115X42mm	142X50mm	168X60mm	227X70mm
Cut Out	:	75mm	100mm	130mm	155mm	200mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)				
		Note : 2700/3500/5000k (available on request)				
Beam Angle	:	45°				
CRI	:	80/90 (available on request)				
Material	:	Aluminium				
LED Brand	:	Bridgelux/Lumware or Equivalent				

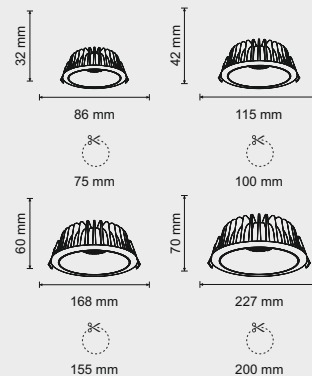

Upto 4KV
Surge



Flicker Free





Anti Glare





Energy Saving

LOOP

LASERBLADE




Watt	:	4w	6w	8w
Dimension	:	52X32X40mm	62X32X40mm	52X52X40mm
Cut Out	:	46X26mm	56X26mm	46X46mm



Watt	:	10w	15w	20w
Dimension	:	108X32X40mm	71X71X40mm	204X32X40mm
Cut Out	:	102X26mm	65X65mm	198X26mm

CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	30°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent

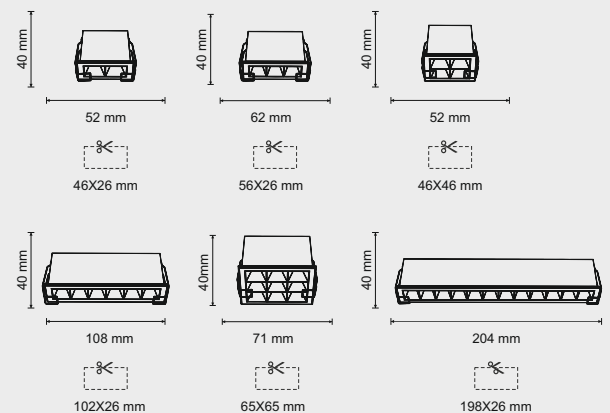

Dimming & Tuning Technology



RF 2.4G + BLE TRIAC/PHASE CUT

BK WH Body Color Available




STREAK

LASERBLADE



Watt	:	4w
Dimension	:	52X52X56mm
Cut Out	:	42X42mm



Watt	:	12w
Dimension	:	128X52X56mm
Cut Out	:	120X42mm




Watt	:	16w
Dimension	:	90X90X56mm
Cut Out	:	80X80mm



Watt	:	20w
Dimension	:	205X52X56mm
Cut Out	:	195X42mm

CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)
Beam Angle	:	38°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent

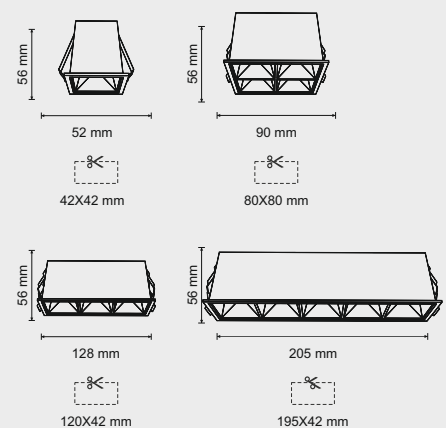

Dimming & Tuning Technology



RF 2.4G + BLE TRIAC/PHASE CUT

BK

WH

Body Color Available



Upto 4KV
Surge



Flicker Free




Anti Glare



Energy Saving

FORCE

TRACKLIGHT

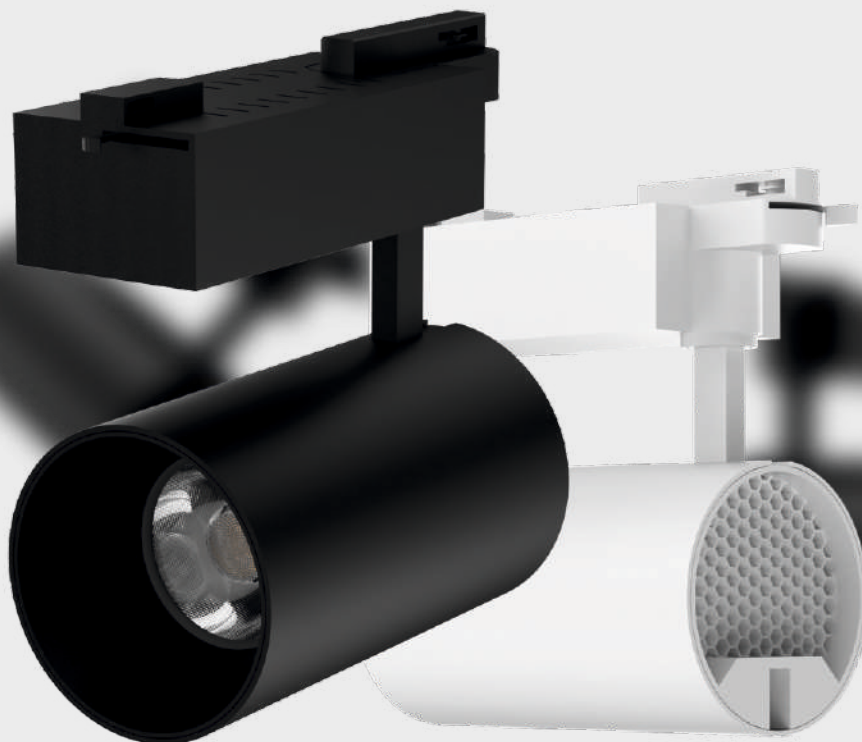

Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	12w	20-30w
Dimension	:	146X60X140mm	146X80X160mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	24/38°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	



Upto 4KV
Surge



Flicker Free



Anti Glare



Energy Saving

CHARGE

TRACKLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	12w	20w	30w
Dimension	:	120X130X50mm	136X157X65mm	158X184X76mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	15/24/36/55°	24/36/55°	24/36/55°
CRI	:	80/90 (available on request)		
Material	:	Aluminium		
LED Brand	:	Bridgelux/Lumware or Equivalent		

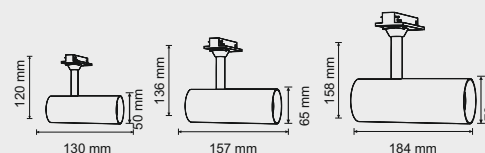

Upto 4KV
Surge



Flicker Free



Anti Glare



Energy Saving

FLARE

TRACKLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	20-25w	30-36w
Dimension	:	75X125X170mm	105X145X230mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	60°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	



Upto 4KV
Surge



Flicker Free



Anti Glare



Energy Saving

TRACK

TRACK CHANNEL

Dimension

1 Meter	:	1000X35X18mm
1.5 Meter	:	1500X35X18mm
2 Meter	:	2000X35X18mm



BK WH Body Color Available

Available : 2 Wire, 3 Wire

COMPASS

MINI SPOTLIGHT



Watt	:	3w
Dimension	:	40X44mm
Cut Out	:	32mm
CCT (K)	:	3000k/4000k
Beam Angle	:	15/24°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent




BOAT

MINI SPOTLIGHT



Watt	:	3w
Dimension	:	40X30mm
Cut Out	:	32mm
CCT (K)	:	3000k/4000k
Beam Angle	:	15/24°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent




PEARL

MINI SPOTLIGHT



Watt	:	3w
Dimension	:	50X35mm
Cut Out	:	44mm
CCT (K)	:	3000k/4000k
Beam Angle	:	15/24°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

BK

WH

Body Color Available



Upto 4KV
Surge



Flicker Free




Energy Saving

CRUISE

MINI SPOTLIGHT



Watt	:	3w
Dimension	:	40X35mm
Cut Out	:	32mm
CCT (K)	:	3000k/4000k
Beam Angle	:	15/24°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent




DUKE

MINI SPOTLIGHT



Watt	:	3w
Dimension	:	40X29mm
Cut Out	:	32mm
CCT (K)	:	3000k/4000k
Beam Angle	:	15/24°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent




BLAST

MINI SPOTLIGHT



Watt	:	3w
Dimension	:	40X26mm
Cut Out	:	32mm
CCT (K)	:	3000k/4000k
Beam Angle	:	15/24°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

BK

WH

Body Color Available



Upto 4KV
Surge



Flicker Free




Energy Saving

ATOM

MINI SPOTLIGHT



Watt	:	5w
Dimension	:	50X45mm
Cut Out	:	43mm
CCT (K)	:	3000k/4000k
Beam Angle	:	40°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent



SENSE

MINI SPOTLIGHT



Watt	:	3w
Dimension	:	46X60mm
Cut Out	:	43mm
CCT (K)	:	3000k/4000k
Beam Angle	:	25°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent




ZEST

MINI SPOTLIGHT



Watt	:	3w
Dimension	:	40X32mm
Cut Out	:	33mm
CCT (K)	:	3000k/4000k
Beam Angle	:	30°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

BK

WH

Body Color Available



Upto 4KV
Surge



Flicker Free




Energy Saving

HAMMER

MINI SPOTLIGHT


Watt	:	3w
Dimension	:	36X45mm
Cut Out	:	30mm
CCT (K)	:	3000k/4000k
Beam Angle	:	25°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent



STRIKE

MINI SPOTLIGHT

Watt	:	3w
Dimension	:	40X36mm
Cut Out	:	36mm
CCT (K)	:	3000k/4000k
Beam Angle	:	25°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

BK

WH

Body Color Available



Upto 4KV
Surge



Flicker Free







Energy Saving

BRIO

FOOTLIGHT

Watt	:	3w
Dimension	:	45X24mm
Cut Out	:	35mm
Beam Angle	:	120°

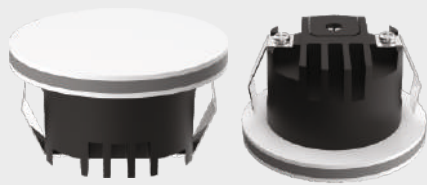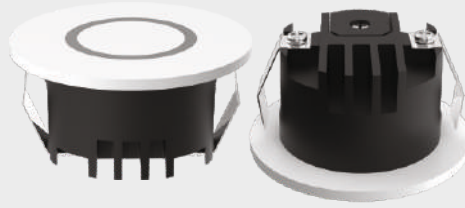

EDGE





FOOTLIGHT

Watt	:	3w
Dimension	:	45X24mm
Cut Out	:	35mm
Beam Angle	:	180°

GUSTO

FOOTLIGHT

Watt	:	3w
Dimension	:	45X24mm
Cut Out	:	35mm

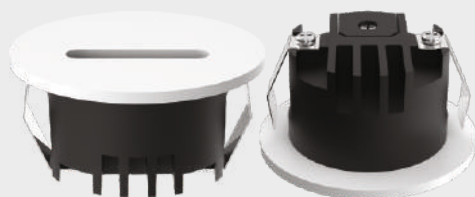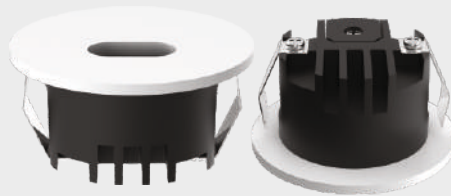


DASH

FOOTLIGHT

Watt	:	3w
Dimension	:	45X24mm
Cut Out	:	35mm

CCT(K)	:	3000k/4000k
CRI	:	80/90 (Available on request)
Material	:	Aluminium with Sand Finish Coating
LED Brand	:	Bridgelux/Lumware or Equivalent



BK **WH** Body Color Available

BEAT

STRIP LIGHT



NEW
ARRIVAL

Voltage	:	12V			
Watt (Size)	:	6w/mtr. (8mm)	12w/mtr. (5mm)	12w/mtr. (8mm)	18w/mtr. (5mm)
LED/mtr.	:	2835 (60LED/mtr.)	2835 (120LED/mtr.)	2835 (120LED/mtr.)	2835 (180LED/mtr.)
		18w/mtr. (10mm)	24w/mtr. (10mm)		
		2835 (180LED/mtr.)	2835 (240LED/mtr.)		

Voltage	:	24V			
Watt (Size)	:	6w/mtr. (8mm)	12w/mtr. (5mm)	12w/mtr. (8mm)	18w/mtr. (5mm)
LED/Mtr.	:	2835 (60LED/mtr.)	2835 (120LED/mtr.)	2835 (120LED/mtr.)	2835 (180LED/mtr.)
		18w/mtr. (10mm)	24w/mtr.(10mm)		
		2835 (180LED/mtr.)	2835 (240LED/mtr.)		

CCT(K)	:	3000k/4000k/6500k
Beam Angle	:	120°
CRI	:	80/90 (Available on request)
LED Brand	:	Bridgelux/Lumware or Equivalent
IP Rating	:	IP20



Upto 4KV
Surge



Flicker Free



Energy Saving

BEAT

STRIP LIGHT (CCT)



NEW
ARRIVAL

Voltage	:	12V	
Watt (Size)	:	18w/mtr. (10mm)	21.6w/mtr. (10mm)
LED/Mtr.	:	2835 (180LED/mtr.)	2835 (216LED/mtr.)

Voltage	:	24V		
Watt (Size)	:	19.2w/mtr. (10mm)	21.6w/mtr. (10mm)	24w/mtr. (10mm)
LED/Mtr.	:	2835 (192LED/mtr.)	2835 (216LED/mtr.)	2835 (240LED/mtr.)

CCT(K)	:	3000k/4000k/6500k
Beam Angle	:	120°
CRI	:	80/90 (Available on request)
LED Brand	:	Bridgelux/Lumware or Equivalent
IP Rating	:	IP20



Upto 4KV
Surge



Flicker Free



Energy Saving



Work with
SMPS

WALLGRAZER

CURTAIN STRIPLIGHT

Voltage	:	24V
Watt	:	16w
LED	:	48LED
CCT(K)	:	3000k/4000k



Watt	:	2X14.4w
LED	:	56LED
CCT(K)	:	3000k/4000k/6500k/3000-6500k(Tunable)
Beam Angle	:	24°
Size	:	12mm
IP	:	Ip20

NEW
ARRIVAL

WIDE BEAM STRIP

DIFFUSED STRETCH CEILING LIGHT

Voltage	:	24V
Watt	:	24w
LED	:	24LED
CCT(K)	:	3000k/4000k/6500k/3000-6500k(Tunable)
Beam Angle	:	165°
Size	:	15mm
IP	:	Ip20



Upto 4KV
Surge



Flicker Free



Energy Saving




Work with
SMPS

SKY LINE



NEW
ARRIVAL

Belt Width	:	20mtr./Roll
Application Width	:	<10mm
IP	:	Ip20
Beam Angle	:	360° Angle Adjustable

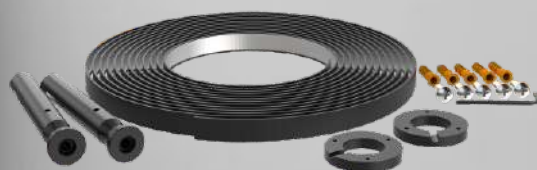

Upto 4KV
Surge



Flicker Free





Energy Saving



Work with
SMPS

SILICON FLEX

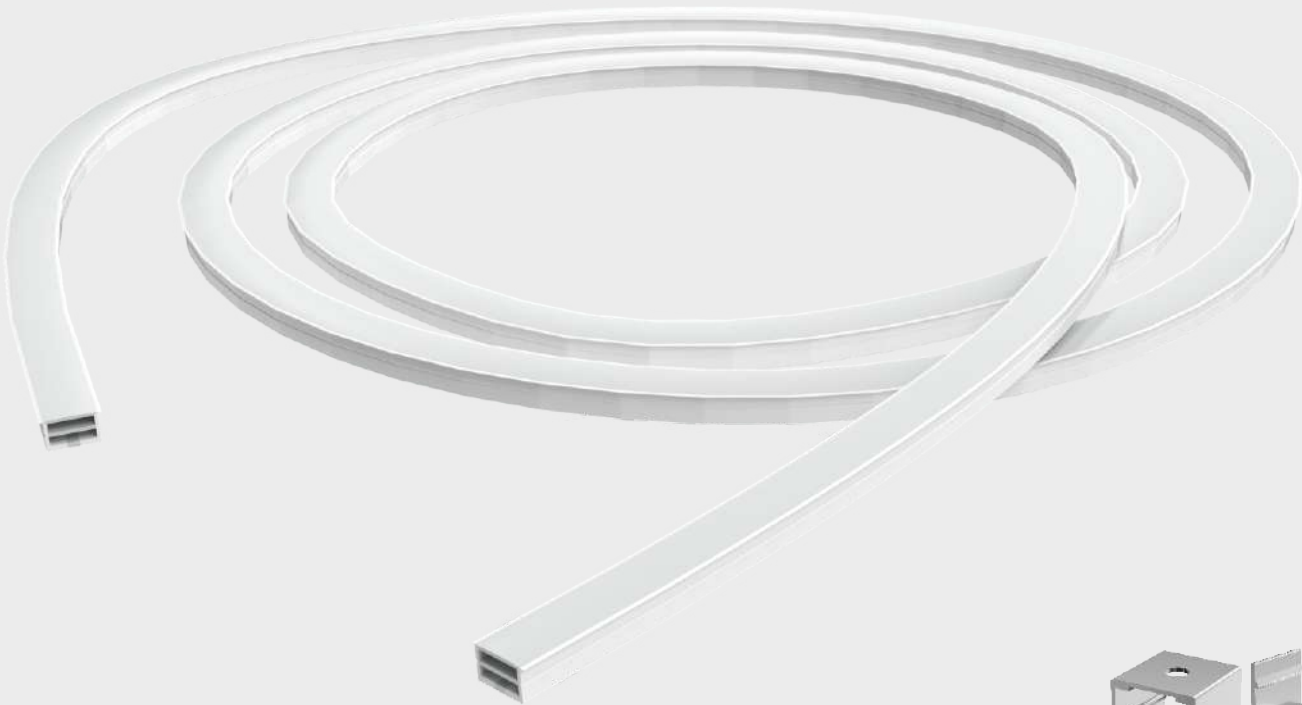

NEW
ARRIVAL

Type	:	Inbuilt Strip Silicon Flex				
Item	:	1010	1212	1510	408	1616
Watt	:	7.5w				
Voltage	:	24V				

Type	:	Blank Silicon Flex				
Item	:	2014	808	1616	1510	1510 (Black)
Silicon Flex Clips	:	1010	1212	1510	1616	408

BEAT


PENCIL SMPS



Voltage	:	12V	
Watt/Amp	:	24w/2Amp	60w/5Amp
Dimension	:	190X80X16mm	315X18X16mm

BEAT

ECO SMPS

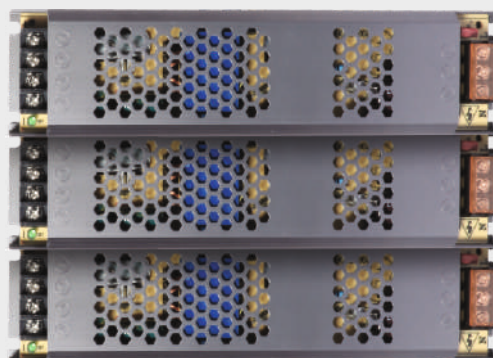

Voltage	:	12V			
Watt/Amp	:	60w/5Amp	100w/8.5Amp	120w/10Amp	150w/12.5Amp
		200w/16.5Amp			
Dimension	:	150X53X22mm	195X53X22mm	226X53X22mm	250X53X22mm
		282X53X22mm			
Voltage	:	24V			
Watt/Amp	:	60w/2.5Amp	100w/4.1Amp	120w/5Amp	
Dimension	:	150X53X22mm	145X49X29mm	226X53X22mm	



Upto 4KV
Surge



Flicker Free



Energy Saving

BEAT

SLIM SMPS



NEW
ARRIVAL

Voltage	:	12V			
Watt/Amp	:	36w/3Amp	60w/5Amp	100w/8.3Amp	200w/16.5Amp
Dimension	:	161X26X21mm	183X26X21mm	220X26X21mm	274X26X21mm

Voltage	:	24V			
Watt/Amp	:	36w/1.5Amp	60w/2.5Amp	100w/4.2Amp	200w/8.4Amp
Dimension	:	161X26X21mm	183X26X21mm	220X26X21mm	274X26X21mm



Upto 4KV
Surge




Flicker Free



Energy Saving

DAY LIGHT SENSOR

MOTION SENSOR

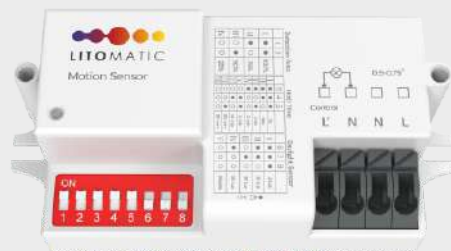

NEW
ARRIVAL

HUMAN BEING SENSOR

MOTION SENSOR



NEW
ARRIVAL

ILLUMINATION SENSOR

SENSOR



REMOTE

REMOTE CONTROLLER



SCENE SWITCH

SCENE CONTROLLER

NEW
ARRIVAL

BUTTON REMOTE



GATEWAY BLE

OUR CLIENTS

RAMADA

Radisson
HOTELS & RESORTS

ananta
Hotels & Resorts

Hilton
HOTELS & RESORTS

H
Holiday Inn

THE WESTIN

SAYAJI
Since 1946

COURTYARD
BY MARRIOTT

Howard Johnson
BY WYNDHAM



ITC HOTELS
RESPONSIBLE LUXURY



tapri
the tea house

MALL OF JAIPUR
CELEBRATIONS OF LIFE

PHOENIX
MARKET CITY
Pune

nexus
CELEBRATION



SECURE

ARTEN
SPACE

I.E.V.O

RK MARBLE

haique
ELEVATED LIVING

KALYAN
JEWELLERS

D.P. Jewellers
A BOMBAY TRUST GROUP LTD
A VENTURE OF D.P. ARABIANIA LIMITED

UNITY

kotak
Kotak Mahindra Bank

Bank of Baroda
वैक बैंक बरोडा

Bank of India

firstery

PETER ENGLAND

zari

Klub Fox

Rustomjee

madame

JAIPUR RUGS

OZONE
FOR A SAFER WORLD

Mahindra

TATA

HYUNDAI

MCG
MORRIS GARAGES
Since 1924

Hero

INDIRA IVF
FERTILITY & IVF CENTRE

zydus
Dedicated To Life

Vedantaa
INSTITUTE OF MEDICAL SCIENCES
VEDANTAA HOSPITAL & RESEARCH CENTRE

Apollo PHARMACY

VIJAYA
MEDICAL CENTRE

Eris
POWER OF EMPATHY
TRUTH OF SCIENCE

Olive
HEALTHCARE



WHERE LIGHT
BECOMES THE
MASTERPIECE



SIMPLIFIED INTELLIGENT LIGHTING

Head Office

Plot No. : E1-228, RIICO Industrial Area,
Opp. Urban Square Mall, Sukher, Udaipur - 313001 (Raj.)

info@litomatic.com
www.litomatic.com