



Select
SERIES



INDOOR TECHNICAL LIGHTING

CATALOGUE
SEPTEMBER 2024





CRAFTING BRILLIANCE IN EVERY BEAM

INDEX

06-08

About Litomatic

09

About Select Series

10

Our Presence

11-16

Phantom

17

Punch

18-19

Blaze / Cone / Star

20

Spirit

21

Ford

22

Arrow

23

Intense

24

Evoke

25

Bravo

26

Oscar

27

Roast

28-29

Sapphire

30-31

Sparo

32

Brisk

33

Beam

34

Meteor

35

Steam

INDEX

36	Cloud
37	Absolute
38-39	Elan
40-41	Muscle
42	Marshall & Miracle
43	Trace
44	Drift
45	Bullet
46	Joy / Esteem
47	Pace
48	Shade
49	Marvell
50	Vellar
51	Hope & Mint
52-60	20mm Magnetic Series
61-62	Hanging
63	20mm Magnetic Accessories
64-68	10mm Magnetic Series
69	Remote Controller / Gateway
70	Our Clients



About Litomatic

Established in 1992 as Kardhar Electric Co., Litomatic has grown into a leading name in the lighting industry. With Raj Kothari joining in 2011 and supported by Ashish Kothari's expertise, Litomatic expanded by importing lighting goods from China in 2013. Formally founded in 2016, Litomatic swiftly pioneered remote-controlled tunable and dimmable lighting in India, ensuring superior products through extensive testing in Udaipur. Litomatic also boasts a well-equipped in-house lab that supports its manufacturing processes, enhancing reliability and delivering complete lighting solutions without needing external consultants or service providers. Participation in key exhibitions from 2017 to 2019 bolstered its reputation, leading to a state-of-the-art manufacturing facility.

Guided by in-house R&D, Litomatic's advanced LED and COB technology ensures precision and efficiency. The brand's commitment to the 'Make in India' initiative and over 300+ dies and molds reflect its dedication to innovation and quality. With a network of over 300 partners across 110+ cities, Litomatic continues to revolutionise spaces with exceptional yet economical lighting solutions. Litomatic stands as a beacon of excellence, poised to illuminate the future.

CERTIFIED

IS- 15885
(Part 2/Sec 13) : 2012



R - 84003603
www.bis.gov.in

IS- 10322
(Part 5/Sec 1) : 2012



R - 84004740
www.bis.gov.in

IS- 10322
(Part 5/Sec 2) : 2012



R - 84004669
www.bis.gov.in

IS- 10322
(Part 5/Sec 7) : 2017



R - 84004685
www.bis.gov.in





LITOMATIC R&D

Lighting Innovations - Product Development & Design

LITOMATIC's expertise shines in luminaire engineering, blending aesthetics and functionality for unrivalled brilliance. Our meticulous approach encompasses the precise selection of light sources, materials with optimal heat sink capacity, and cutting-edge technologies. With a keen focus on achieving the highest standard of lighting emission, each functional prototype serves as a catalyst for refining elements and orchestrating a seamless creative progression. Experience the alchemy of innovation as we illuminate the path to luminaire excellence.

Factory Innovations - Crafting Excellence

At Litomatic, we are dedicated to delivering products that embody contemporary design through exceptional craftsmanship. Our cautious material selection, accurate finishing, and continuous research and development ensure durable and reliable products that elevate the global market. Each creation harmoniously fuses structure, light, and architecture, challenging artistic boundaries.

Machining Center - Precision Meets Artistry

Our cutting-edge machining centers enable us to achieve uncompromising quality, from grinding to precise processing. These high-precision machines play an indispensable role in crafting our finest products.

Exquisite Workmanship - Quality and Beauty

Litomatic lamps are renowned for their superior quality and meticulous manufacturing. From mold manufacturing to die casting, we passionately uphold the highest standards of craftsmanship.

Seamless Assembly - Precision and Safety

Our skilled staff follows strict procedures on electrical and mechanical assembly lines, guaranteeing compliance with regulations. We prioritize electrical safety checks, ensuring the utmost reliability of our luminaires.

Packing and Delivery - Global Excellence

Every Litomatic product undergoes painstaking preparation and packaging, ready to be shipped worldwide. As a trusted brand, Litomatic delivers excellence to customers across numerous countries and regions.





CRI Technology for Color Accuracy

Color accuracy is crucial in lighting, and the Color Rendering Index (CRI) helps assess how faithfully a light source reveals colors compared to natural light. LED lighting, with its different color temperatures and light variations, directly affects color accuracy. Opting for higher CRI-rated LEDs ensures more accurate color representation. Experience vibrant and true-to-life colors with Litomatic's advanced CRI technology.

Glare-Free LED Lighting

At Litomatic, we prioritize the ultimate lighting experience with our precision-engineered anti-glare technology. Through meticulous control and innovative design, we ensure secondary optical refraction curves and superior electroplate treatment, resulting in flicker-free, high-performance lighting even in low-light conditions. With a generous beam angle of up to 40°, our luminaires create a serene and comfortable lighting atmosphere, allowing you to enjoy the illumination without any distracting glare.

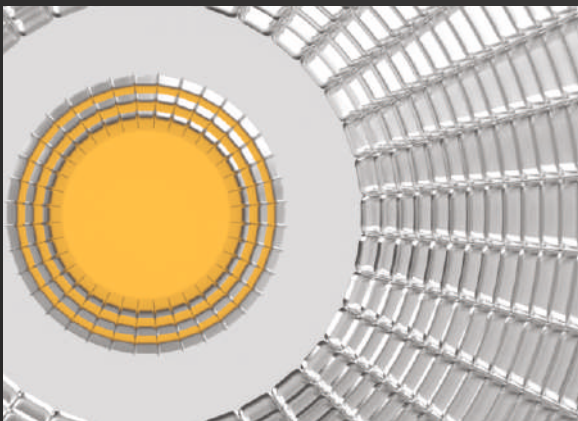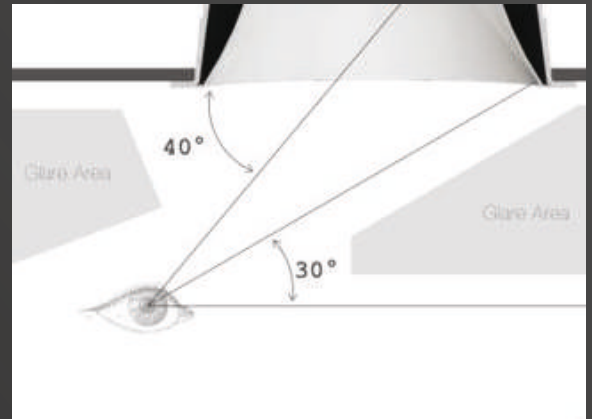

LED Chips Illuminating Innovation

LED chips, the heart of modern lighting, revolutionize illumination with advanced technology. These compact semiconductor devices drive efficiency, superior color rendering, and remarkable longevity. Powering smart light bulbs and energy-saving solutions, LED chips redefine lighting experiences. Illuminate your space with efficiency and brilliance using Litomatic's high-quality LED chips.

Brilliant COB Lighting

Experience flawless lighting with Litomatic's cutting-edge Chip-On-Board (COB) technology. Our COB fixtures deliver even natural light without double images, creating a clean and dimensionally rich lighting experience. Say goodbye to blurry edges and embrace Litomatic's superior COB lighting for captivating illumination.




ABOUT **Select** SERIES



Introducing the Select Lighting Series by Litomatic—a pinnacle of premium illumination, designed to enhance luxurious residential settings with unparalleled elegance. This exclusive range offers exceptional anti-glare performance, blending seamlessly into sophisticated interiors and providing a soothing visual experience. Equipped with top-tier drivers, each fixture delivers superior energy efficiency, flicker-free illumination, and extended longevity. These products also feature advanced optics for outstanding performance, making them a preferred choice for discerning architects, interior designers and lighting consultants. The Select Series strikes a perfect balance of aesthetics and performance, elevating the ambience of any high-end living space with lasting brilliance.



RF 2.4G + BLE

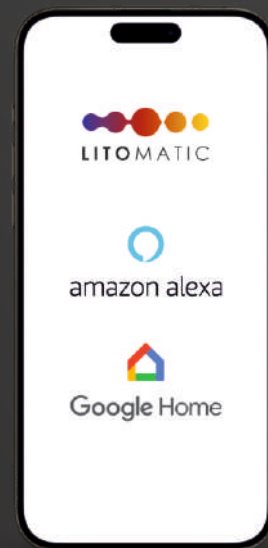

1st
PIONEER
with this CONCEPT
SINCE **2016**




OUR PRESENCE

110+ Cities 300+ Dealers Across India

Agra, Ahmedabad, Ajmer, Akola, Ambikapur, Amravati, Amritsar, Anand, Aurangabad, Balgaum, Banswara, Bareilly, Barmer, Barnala, Baroda, Begur, Begusarai, Bengaluru, Bharuch, Bhatinda, Bhavnagar, Bhawanipatna, Bhilai, Bhilwara, Bhopal, Bhubaneswar, Bikaner, Bilaspur, Chandigarh, Chennai, Cochin, Coimbatore, Dehradun, Dhule, Durg, Ernakulam, Faridabad, Fatehabad, Firozabad, Gandhidham, Ghaziabad, Goa, Gorakhpur, Gurgaon, Guwahati, Hanumangarh, Hazaribagh, Hisar, Hubballi, Hyderabad, Indore, Jabalpur, Jaipur, Jalgaon, Jamnagar, Jind, Jodhpur, Jalandhar, Kannur, Karnal, Kendujhar, Khanna, Kishangarh, Kolhapur, Kolkata, Kota, Kottayam, Kozhikode, Kutch, Lucknow, Ludhiana, Madurai, Malur, Mangaluru, Mathura, Meerut, Moga, Morbi, Mumbai, Mysore, Nabha, Nagpur, Nanded, Nashik, Navi Mumbai, New Delhi, Noida, Palakkad, Panipat, Patiala, Patna, Prayagraj, Pune, Raipur, Rajkot, Rajsamand, Ranchi, Ratlam, Salem, Satara, Secunderabad, Sikar, Siliguri, Siwan, Solapur, Surat, Talegaon, Thane, Thrissur, Tiruppur, Trichy, Trivandrum, Udaipur, Vadodara, Visakhapatnam.

PHANTOM

ANTI GLARE SPOTLIGHT

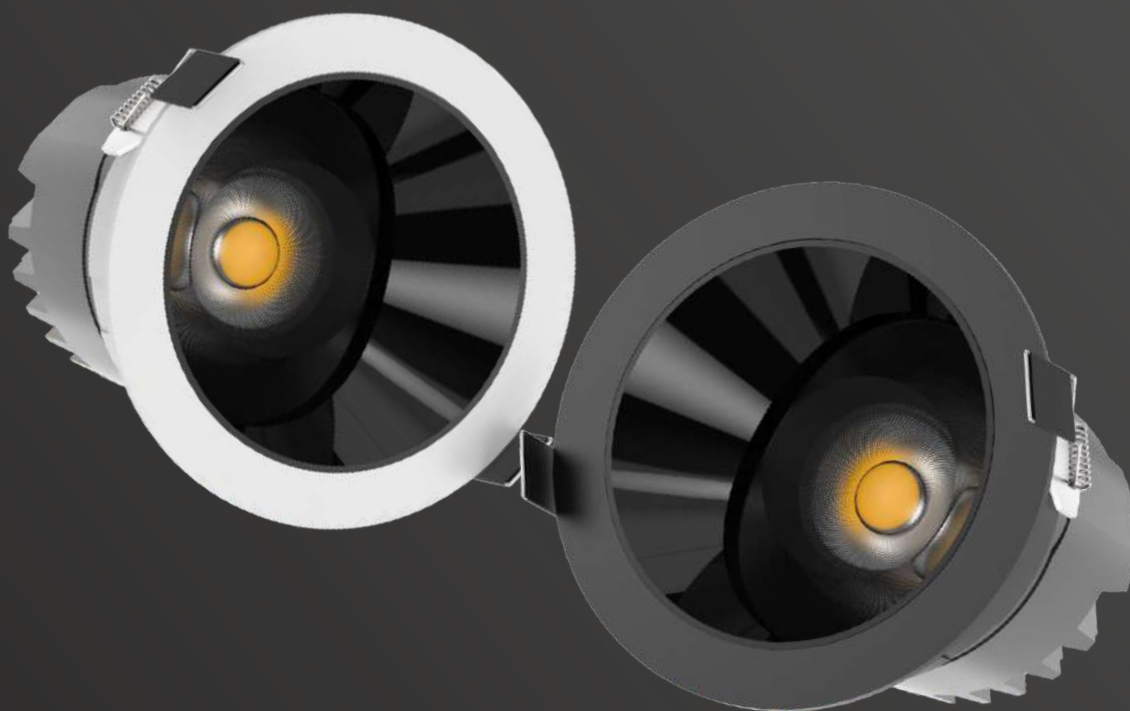

Dimming & Tuning Technology

Note : White (available on request)



RF 2.4G + BLE

TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	7w	12-15w	20-25w
Dimension	:	62X83mm	85X95mm	110X115mm
Cut Out	:	55mm	75mm	95mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	15/24/36/60°		
CRI	:	80/90 (available on request)		
Material	:	Aluminium		
LED Brand	:	Bridgelux/Lumware or Equivalent		



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR




Energy Saving



IP44
On Request

PHANTOM

DOUBLE ANTIGLARE SPOTLIGHT

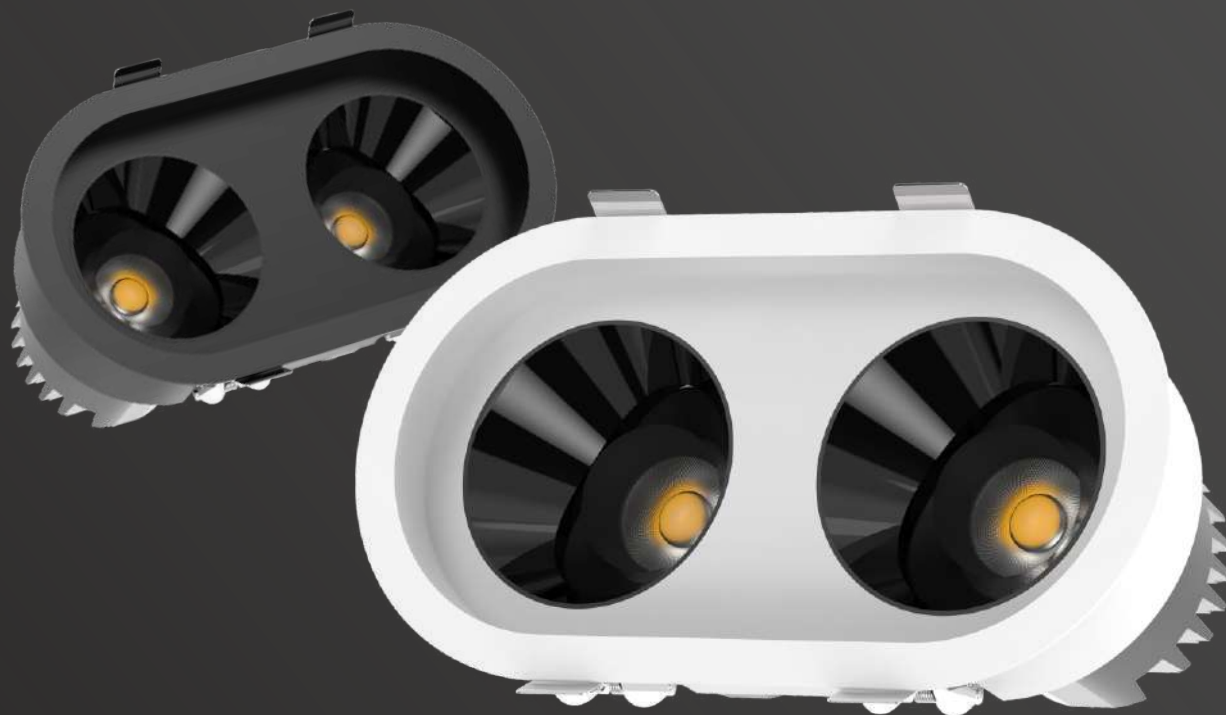

Dimming & Tuning Technology

Note : White (available on request)



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	2X7w	2X12-15w	2X20-25w
Dimension	:	140X80X87mm	195X105X105mm	250X125X127mm
Cut Out	:	125X65mm	180X90mm	235X110mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	15/24/36/60°		
CRI	:	80/90 (available on request)		
Material	:	Aluminium		
LED Brand	:	Bridgelux/Lumware or Equivalent		

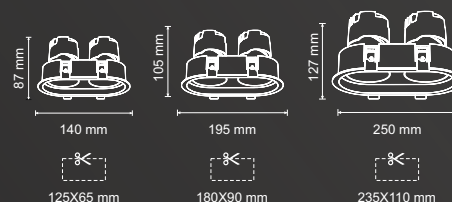

Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR




Energy Saving



IP44
Rating
On Request

PHANTOM

ANTIGLARE SPOTLIGHT

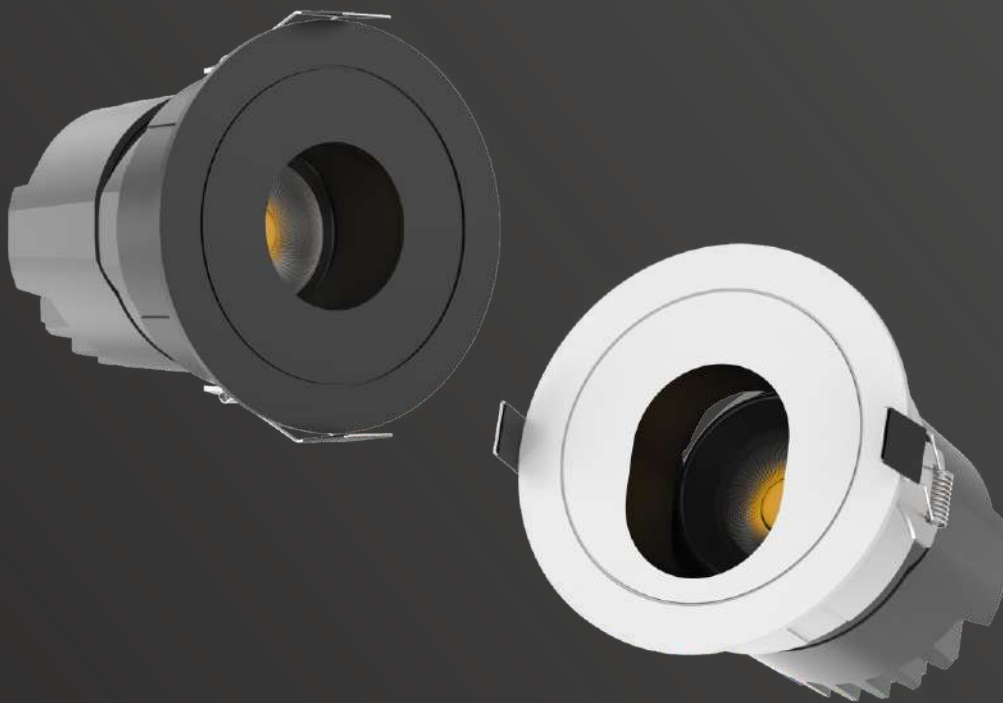

Dimming & Tuning Technology

Note : White (available on request)



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	12-15w (Pin Hole & Wallwasher)
Dimension	:	85X95mm
Cut Out	:	75mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	15/24/36/60°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR



Energy Saving



IP44
On Request

PHANTOM

TRIMLESS ANTIGLARE SPOTLIGHT



Dimming & Tuning Technology

Note : White (available on request)



RF 2.4G + BLE

TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	7w	12-15w	20-25w
Dimension	:	55X83mm	75X95mm	92X115mm
Cut Out	:	55mm	75mm	95mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)		

Note : 2700/3500/5000k (available on request)

Beam Angle	:	15/24/36/60°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR




Energy Saving



IP44
On Request

PHANTOM

SQUARE ANTIGLARE SPOTLIGHT

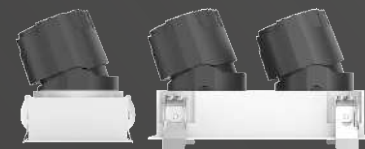

Dimming & Tuning Technology

Note : White (available on request)



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	12-15w	2X12/2X15w
Dimension	:	85X85X105mm	180X90X105mm
Cut Out	:	75X75mm	170X80mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
Note : 2700/3500/5000k (available on request)			
Beam Angle	:	15/24/36/60°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR




Energy Saving



IP44
IP Rating
On Request

ANTI GLARE SPOTLIGHT

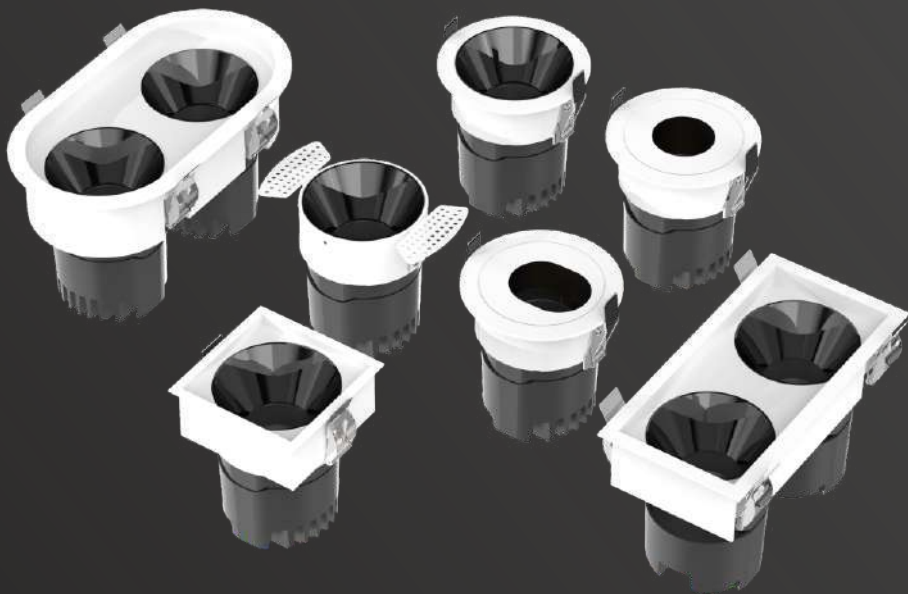

PUNCH

ANTIGLARE SPOTLIGHT



Dimming & Tuning Technology




RF 2.4G + BLE

TRIAC/PHASE CUT

Watt	:	10-12w
Dimension	:	56X80mm
Cut Out	:	50mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable) Note : 2700/3500/5000k (available on request)
Beam Angle	:	38°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent

NEW
ARRIVAL



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR



Energy Saving

MINIMAL SPOTLIGHT



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR




Energy Saving

BLAZE

MINIMAL SPOTLIGHT

Watt	:	10-12w
Dimension	:	52X90mm
Cut Out	:	45mm
Beam Angle	:	24/36/50°

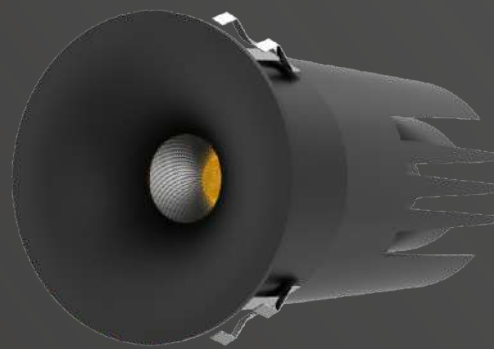

NEW
ARRIVAL




CONE

MINIMAL SPOTLIGHT

Watt	:	10-12w
Dimension	:	52X90mm
Cut Out	:	45mm
Beam Angle	:	24/36/50°

NEW
ARRIVAL

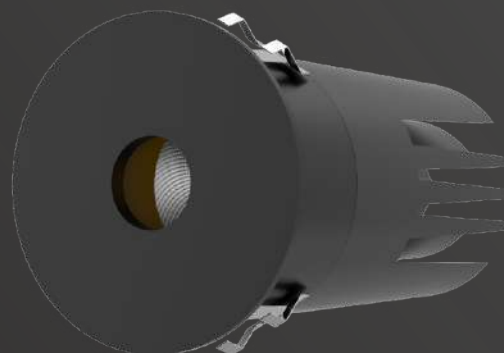

STAR

MINIMAL SPOTLIGHT

Watt	:	10-12w
Dimension	:	52X90mm
Cut Out	:	45mm
Beam Angle	:	24/36/50°
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable) Note : 2700/3500/5000k (available on request)
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent

Dimming & Tuning Technology



RF 2.4G + BLE TRIAC/PHASE CUT

BK WH Body Color Available



Upto 4KV
Surge



Flicker Free



Anti Glare




Low UGR



Energy Saving

SPIRIT

ANTI GLARE SPOTLIGHT

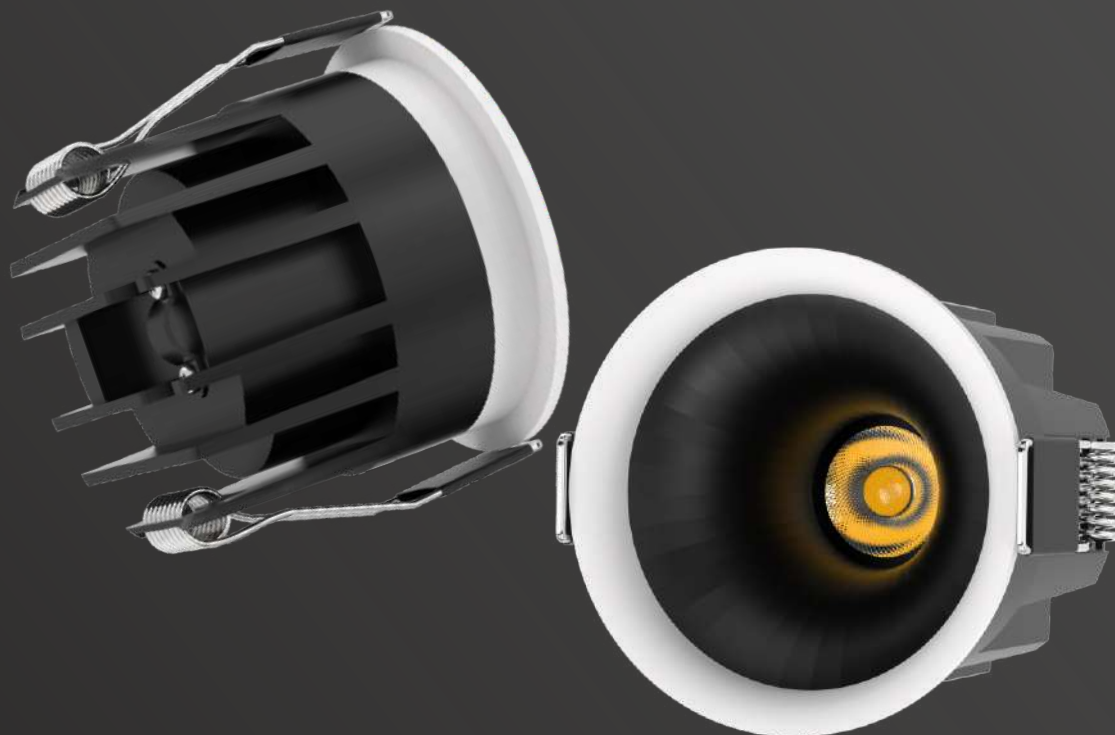

Dimming & Tuning Technology




RF 2.4G + BLE

TRIAC/PHASE CUT

Watt	:	7w	12w
Dimension	:	62X60mm	74X71mm
Cut Out	:	55mm	65mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	36°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	

NEW
ARRIVAL



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR



Energy Saving

FORD

LOW DEPTH SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


BK

WH

Body Color Available

NEW
ARRIVAL

Watt	:	12-15w	20-25w
Dimension	:	96X45mm	105X45mm
Cut Out	:	90mm	98mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
Note : 2700/3500/5000k (available on request)			
Beam Angle	:	24/36/60°	24/36/60°
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	



Upto 4KV
Surge



Flicker Free



Anti Glare




Low UGR



Energy Saving

ARROW

MINIMAL SPOTLIGHT

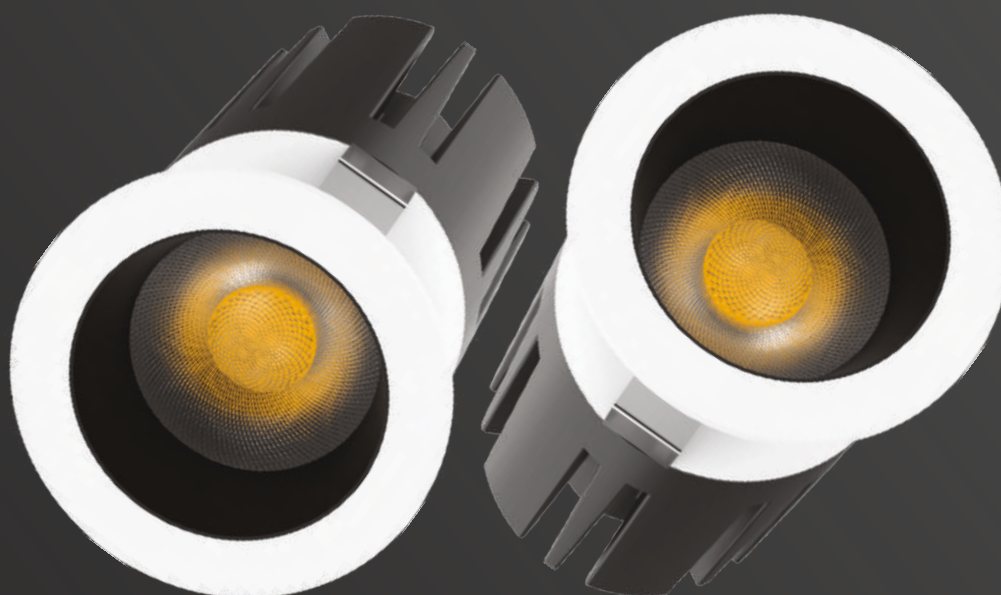

Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	7w	12w
Dimension	:	41X85mm	55X100mm
Cut Out	:	35mm	48mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	24/36/50°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR



Energy Saving

INTENSE

ANTI GLARE SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	5-7w	12-15w	20-25w
Dimension	:	72X48mm	85X58mm	100X73mm
Cut Out	:	62mm	75mm	85mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	24/36/55°		
CRI	:	80/90 (available on request)		
Material	:	Aluminium		
LED Brand	:	Bridgelux/Lumware or Equivalent		



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR





Energy Saving

EVOKE

ANTI GLARE SPOTLIGHT

Watt	:	12w	20w
Dimension	:	62X75mm	75X85mm
Cut Out	:	55mm	65mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	36°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	

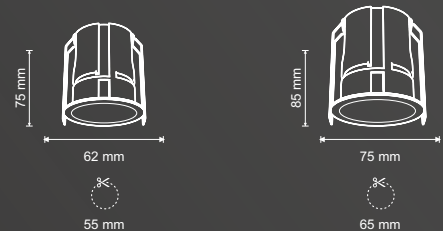
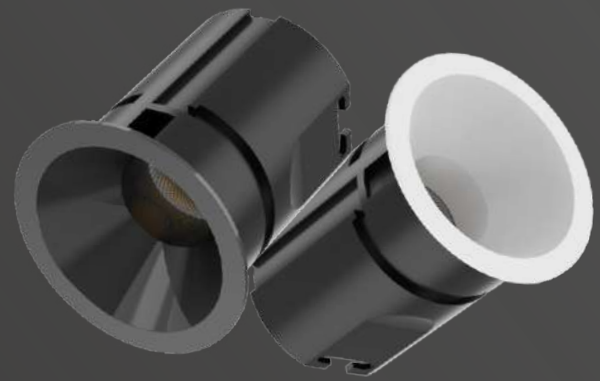


NEW
ARRIVAL

EVOKE

TRIMLESS ANTI GLARE SPOTLIGHT

Watt	:	12w	20w
Dimension	:	80X75mm	112X85mm
Cut Out	:	55mm	75mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	36°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	

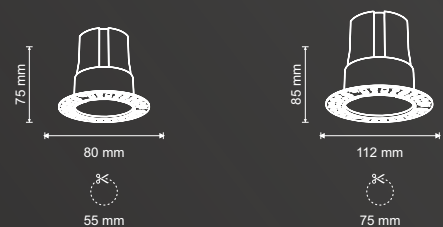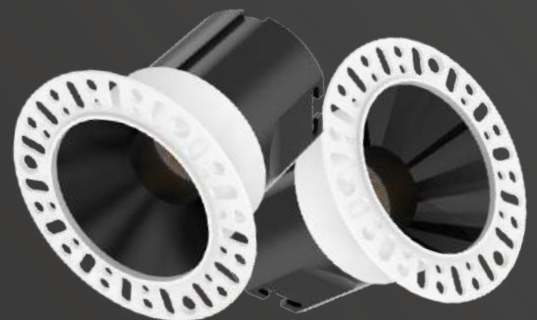

Dimming & Tuning Technology



RF 2.4G + BLE TRIAC/PHASE CUT



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR






Energy Saving

BRAVO

ANTIGLARE SPOTLIGHT




Watt	:	12w	20w
Dimension	:	62X75mm	75X85mm
Cut Out	:	55mm	65mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	36°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	

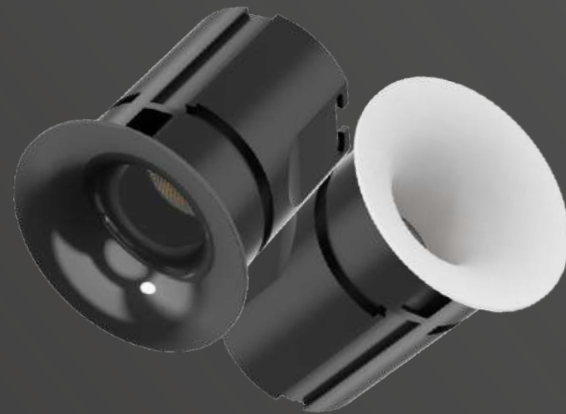

BRAVO

TRIMLESS ANTIGLARE SPOTLIGHT

Watt	:	12w	20w
Dimension	:	80X75mm	112X85mm
Cut Out	:	55mm	75mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	36°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	

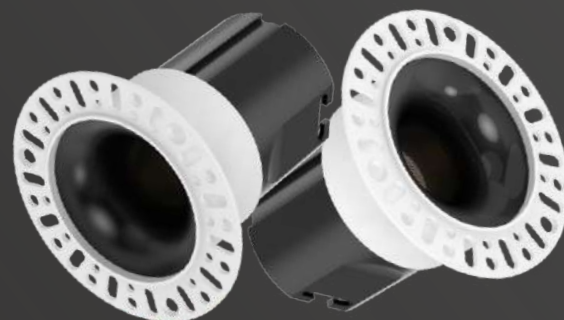

NEW
ARRIVAL

Dimming & Tuning Technology



RF 2.4G + BLE + TRIAC/PHASE CUT



Upto 4KV
Surge



Flicker Free



Anti Glare




Low UGR



Energy Saving

OSCAR

SPOTLIGHT

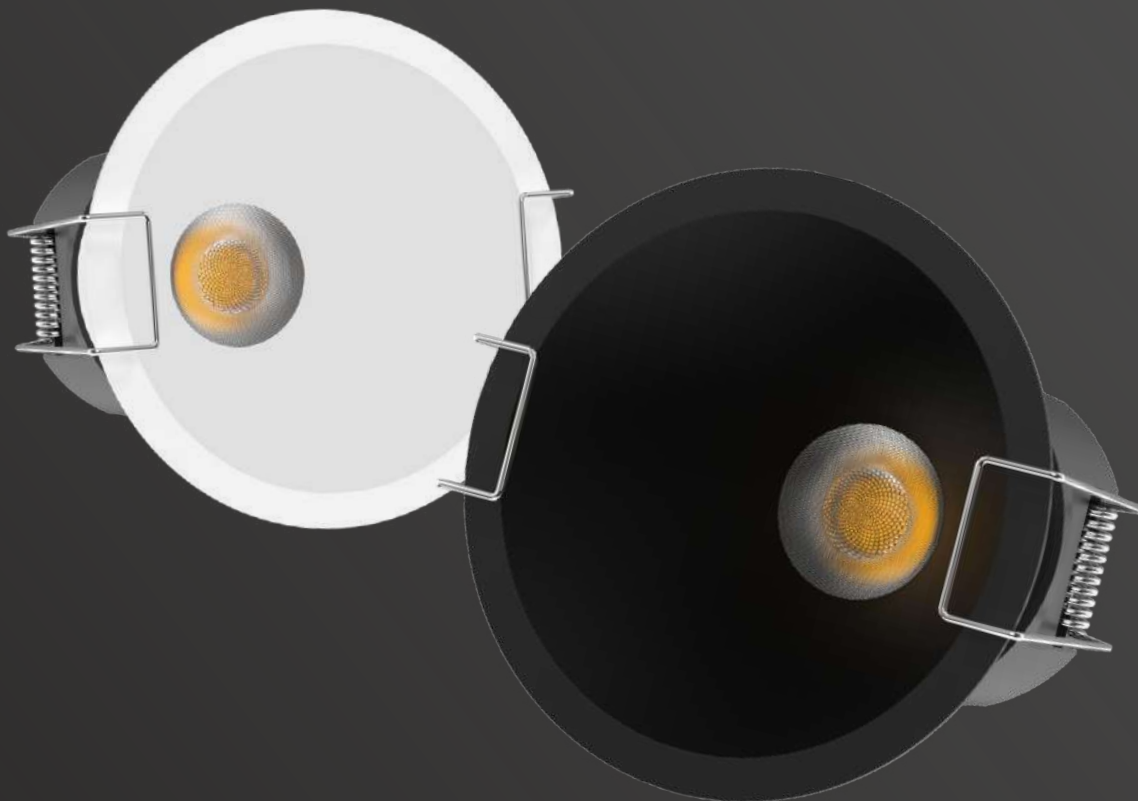

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

BK

WH

Body Color Available

NEW
ARRIVAL

Watt	:	7w	12w	20w
Dimension	:	75X72mm	85X82mm	105X98mm
Cut Out	:	65mm	75mm	95mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	36°		
CRI	:	80/90 (available on request)		
Material	:	Aluminium		
LED Brand	:	Bridgelux/Lumware or Equivalent		



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR



Energy Saving

ROAST

SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


BK

WH

Body Color Available

NEW
ARRIVAL

Watt	:	7w	12w	20w
Dimension	:	60X78mm	70X80mm	85X80mm
Cut Out	:	55mm	65mm	75mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	36°		
CRI	:	80/90 (available on request)		
Material	:	Aluminium		
LED Brand	:	Bridgelux/Lumware or Equivalent		

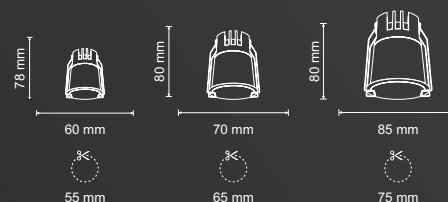

Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR



Energy Saving

SAPPHIRE

PULLOUT SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	7w	12w
Dimension	:	62X85mm	85X105mm
Cut Out	:	55mm	75mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	24/36/50°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR





Energy Saving

SAPPHIRE

DOUBLE PULLOUT SPOTLIGHT


Watt	:	2X7w	2X12w
Dimension	:	140X78X90mm	195X105X115mm
Cut Out	:	125X65mm	180X90mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	24/36/55°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	

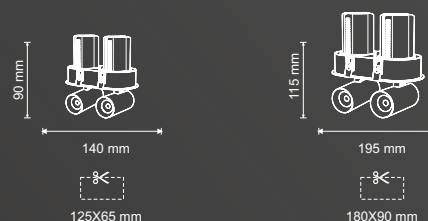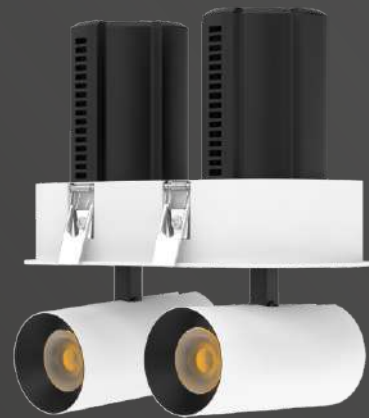

SAPPHIRE

TRIMLESS PULLOUT SPOTLIGHT

Watt	:	7w	12w
Dimension	:	55X86mm	75X105mm
Cut Out	:	55mm	75mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	24/36/50°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	

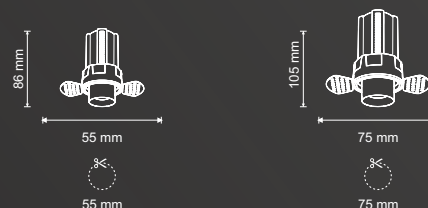

Dimming & Tuning Technology



RF 2.4G + BLE TRIAC/PHASE CUT

BK WH Body Color Available





MINIMAL SPOTLIGHT



SPARO

MINIMAL SPOTLIGHT

Watt	:	10-12w	10-12w
Dimension	:	52X66mm	70X66mm
Cut Out	:	42mm	42mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable) Note : 2700/3500/5000k (available on request)	
Beam Angle	:	24/36/50°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	



Dimming & Tuning Technology



RF 2.4G + BLE TRIAC/PHASE CUT



BK WH Body Color Available



SPARO

MINIMAL SPOTLIGHT

Watt	:	10-12w	10-12w
Dimension	:	52X66mm	70X66mm
Cut Out	:	42mm	42mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	24/36/50°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	






NEW
ARRIVAL

SPARO

MINIMAL SPOTLIGHT

Watt	:	10-12w	10-12w
Dimension	:	52X99mm	52X108mm
Cut Out	:	42mm	42mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	24/36/50°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	

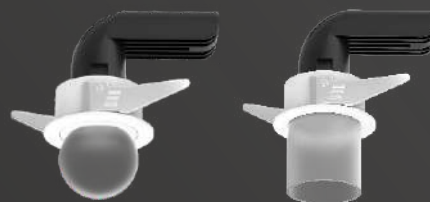

Dimming & Tuning Technology



RF 2.4G + BLE TRIAC/PHASE CUT

BK WH Body Color Available



Energy Saving

BRISK

SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	7w	12w
Dimension	:	57X72mm	68X80mm
Cut Out	:	48mm	58mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	24/36/55°	24/36/55°
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR




Energy Saving

BEAM

ANTI GLARE SPOTLIGHT

Watt	:	7w
Dimension	:	69X54mm
Cut Out	:	56mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	24/38°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent





NEW
ARRIVAL

BEAM

TRIMLESS SPOTLIGHT

Watt	:	7w
Dimension	:	45X55mm
Cut Out	:	65mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	24/38°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent

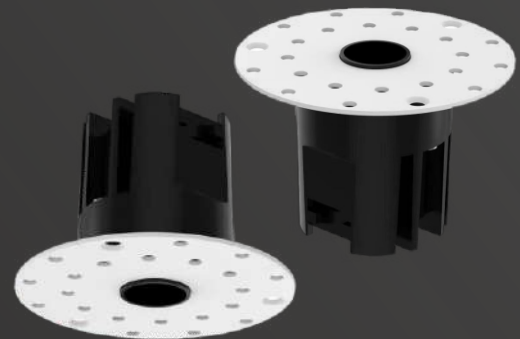

Dimming & Tuning Technology



RF 2.4G + BLE TRIAC/PHASE CUT



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR



Energy Saving

METEOR

POLARIZED WALLWASHER



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	12w
Dimension	:	80X59mm
Cut Out	:	70mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	55°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR



Energy Saving

STEAM

STEAM PROOF SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	12-15w
Dimension	:	85X60mm
Cut Out	:	72mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	36/60°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR




Energy Saving



IP Rating
On Request

CLOUD

STEAM PROOF SPOTLIGHT




Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Watt	:	15w
Dimension	:	85X70mm
Cut Out	:	75mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable) Note : 2700/3500/5000k (available on request)
Beam Angle	:	36°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR




Energy Saving



IP44
On Request

ABSOLUTE

ANTI GLARE SPOTLIGHT




Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Watt	:	12w	20w	30w	36w
Dimension	:	88X65mm	110X75mm	136X96mm	160X110mm
Cut Out	:	75mm	95mm	125mm	150mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)			
		Note : 2700/3500/5000k (available on request)			
Beam Angle	:	90°			
CRI	:	80/90 (available on request)			
Material	:	Aluminium			
LED Brand	:	Bridgelux/Lumware or Equivalent			

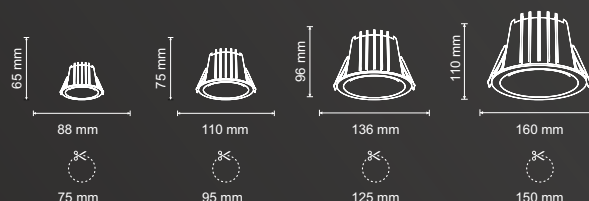

Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR



Energy Saving



IP Rating
On Request

ELAN

LASERBLADE



Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	3w	10w	10w	12w
Dimension	:	45X45X42mm	75X75X42mm	85X38mm	147X45X42mm
Cut Out	:	35x35mm	70X70mm	75mm	142X35mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)			
		Note : 2700/3500/5000k (available on request)			
Beam Angle	:	24/36°			
CRI	:	80/90 (available on request)			
Material	:	Aluminium			
LED Brand	:	Bridgelux/Lumware or Equivalent			

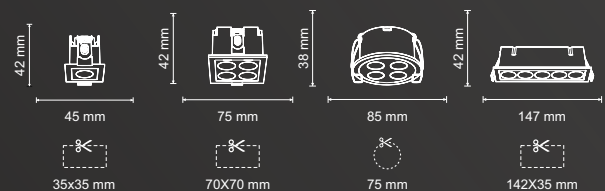

ELAN

SURFACE LASERBLADE



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	10w	10w	12w
Dimension	:	70X83mm	66X66X83mm	138X36X83mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	24/36°		
CRI	:	80/90 (available on request)		
Material	:	Aluminium		
LED Brand	:	Bridgelux/Lumware or Equivalent		



Upto 4KV
Surge



Flicker Free



Anti Glare




Low UGR



Energy Saving

MUSCLE

MINIMAL SPOTLIGHT

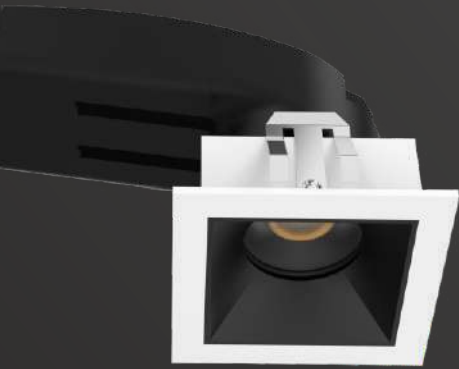


Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Watt	:	12w	12w	2X12w
Dimension	:	54X60mm	55X55X60mm	140X69X90mm
Cut Out	:	45mm	45X45mm	135X58mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	36°		
CRI	:	80/90 (available on request)		
Material	:	Aluminium		
LED Brand	:	Bridgelux/Lumware or Equivalent		

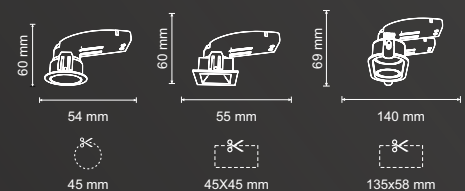

Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR



Energy Saving

MUSCLE

MINIMAL SPOTLIGHT




Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Watt	:	12w	12w
Dimension	:	65X60mm	80X60mm
Cut Out	:	45mm	60mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	36°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR



Energy Saving

MARSHALL

ADJUSTABLE SPOTLIGHT


Watt	:	12w	2X12w
Dimension	:	82X95mm	82X152X95mm
Cut Out	:	75mm	75X145mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	36°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	



MIRACLE

DEGREE ADJUSTABLE SPOTLIGHT

Watt	:	12w
Dimension	:	80X62mm
Cut Out	:	75mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	15-50°Adjustable
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent



Dimming & Tuning Technology



RF 2.4G + BLE TRIAC/PHASE CUT



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR



Energy Saving

TRACE

ADJUSTABLE SPOTLIGHT



Dimming & Tuning Technology




RF 2.4G + BLE

TRIAC/PHASE CUT

Watt	:	20-25w	30-36w
Dimension	:	106X77mm	130X90mm
Cut Out	:	90mm	115mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	36°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	

NEW
ARRIVAL



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR



Energy Saving

DRIFT

ZOOMLIGHT



Dimming & Tuning Technology




RF 2.4G + BLE

TRIAC/PHASE CUT

Watt	:	20-25w	30-36w
Dimension	:	105X85mm	130X105mm
Cut Out	:	90mm	115mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	36°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	

NEW
ARRIVAL



Upto 4KV
Surge



Flicker Free



Anti Glare




Low UGR



Energy Saving

BULLET

CYLINDER SURFACE SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE


TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	7w	12w	20w
Dimension	:	45X100mm	55X113mm	62X130mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	24/36/50°		
CRI	:	80/90 (available on request)		
Material	:	Aluminium		
LED Brand	:	Bridgelux/Lumware or Equivalent		



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR




Energy Saving

JOY

CYLINDER SPOTLIGHT


Type	:	Surface	Concealed
Watt	:	12w	12w
Dimension	:	45X100mm	45X136mm
Cut Out	:	-	42mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	36°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	



ESTEEM

360° CYLINDER SPOTLIGHT

Watt	:	12w
Dimension	:	63X160mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	36°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent



Dimming & Tuning Technology



RF 2.4G + BLE TRIAC/PHASE CUT



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR



Energy Saving

PACE

ADJUSTABLE SURFACE SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Type	:	Square	Round
Watt	:	12w	12w
Dimension	:	80X80X110mm	80X110mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	36°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR



Energy Saving

SHADE

SURFACE SPOTLIGHT




Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Watt	:	12w (Square)	12w (Round)
Dimension	:	78X78X90mm	80X90mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	36°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR



Energy Saving

MARVELL

DEGREE ADJUSTABLE TRACKLIGHT



Dimming & Tuning Technology




RF 2.4G + BLE

TRIAC/PHASE CUT

Watt	:	12w	20w	30w
Dimension	:	55X140mm	65X147mm	75X159mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	10-55°Adjustable		
CRI	:	80/90 (available on request)		
Material	:	Aluminium		
LED Brand	:	Bridgelux/Lumware or Equivalent		

NEW
ARRIVAL

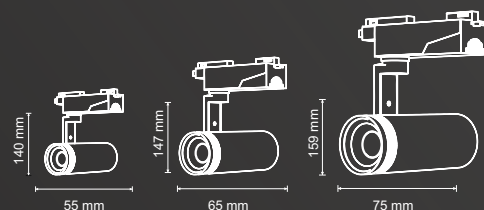

Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR



Energy Saving

VELLAR

TRACKLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Watt	:	20-25w	30-36w
Dimension	:	185X145X74mm	192X150X90mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	36°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR




Energy Saving

HOPE

MINI SPOTLIGHT



Watt	:	3w
Dimension	:	72X20mm
Cut Out	:	17mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)
Beam Angle	:	24°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent



MINT

MINI SPOTLIGHT

Watt	:	3w
Dimension	:	63X20mm
Cut Out	:	17mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)
Beam Angle	:	24°
CRI	:	80/90 (available on request)
Material	:	Aluminium
LED Brand	:	Bridgelux/Lumware or Equivalent

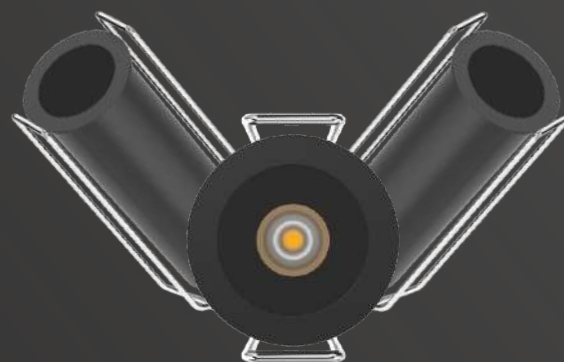

NEW
ARRIVAL

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

BK WH Body Color Available



Upto 4KV
Surge



Flicker Free




Anti Glare



Low UGR



Energy Saving

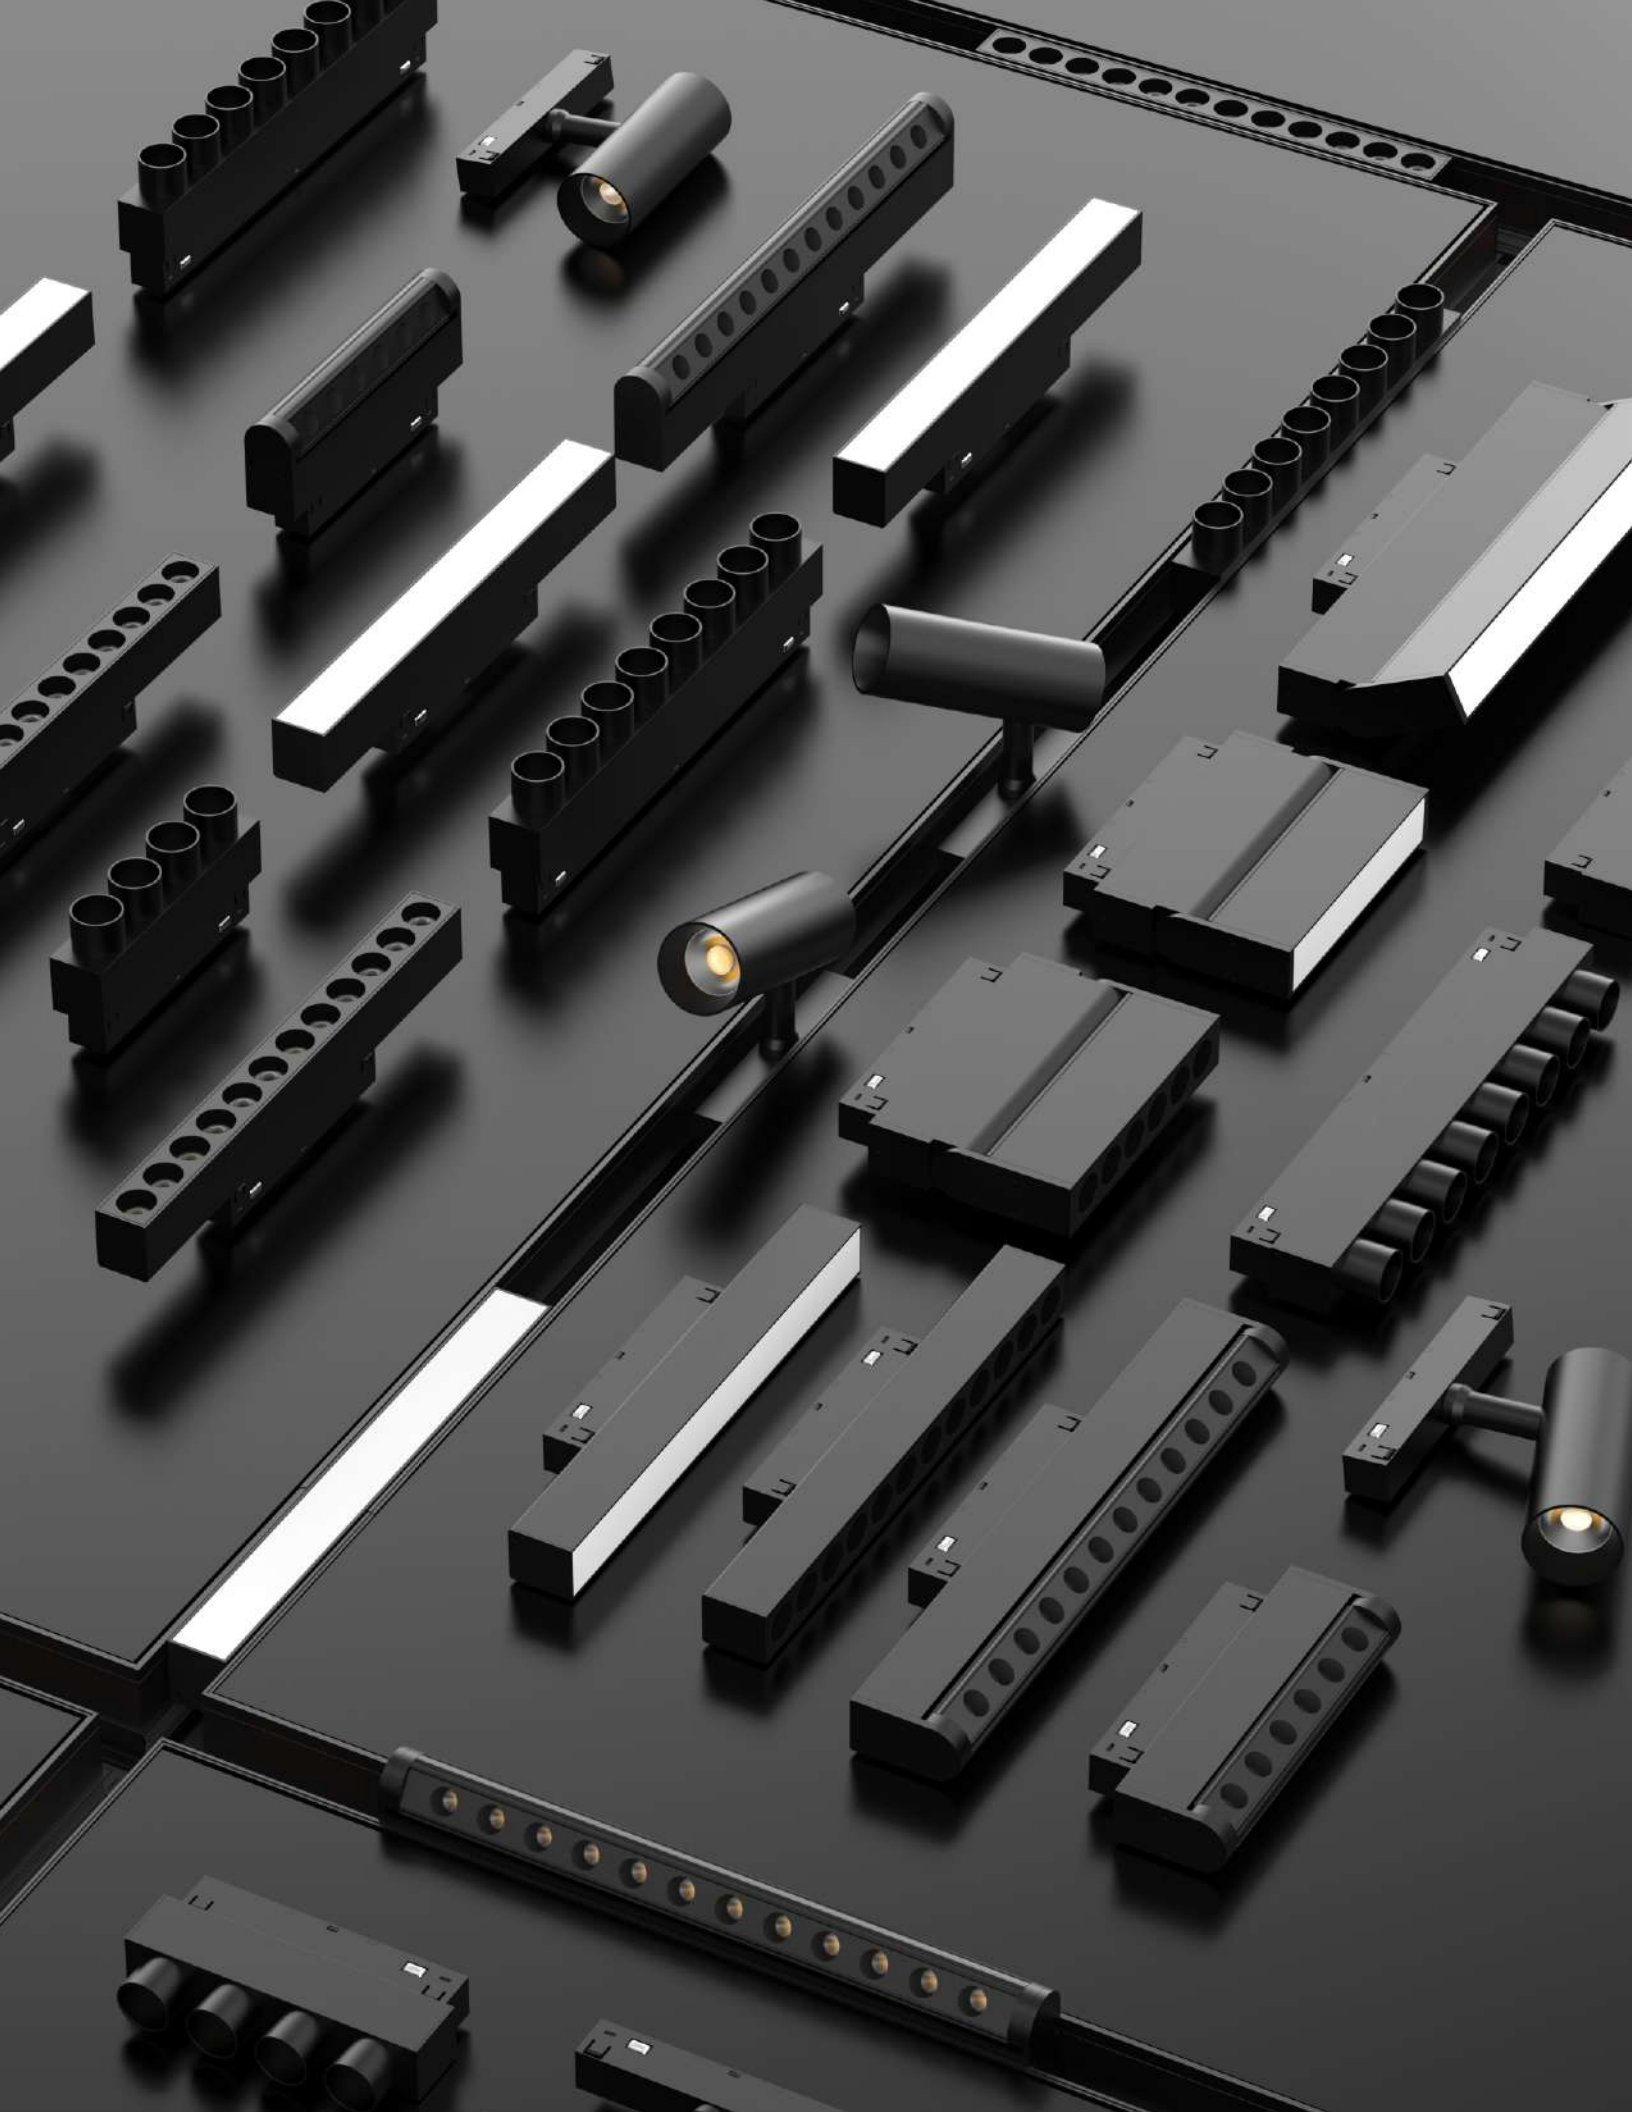

20mm MAGIC

MAGNETIC TRACK SERIES

Hanging —●


Surface —●

Concealed —●







TC20

End Caps




90° Corner (C to C)

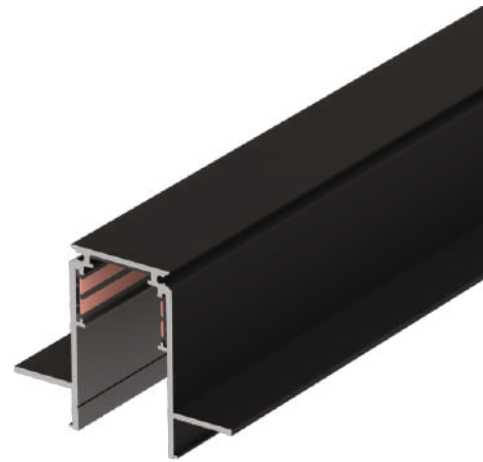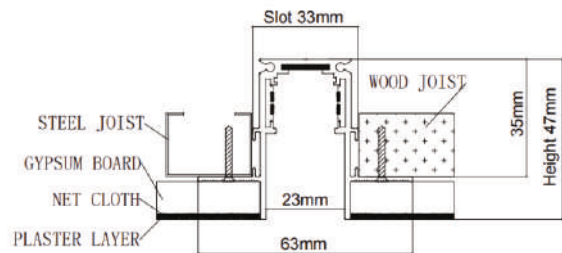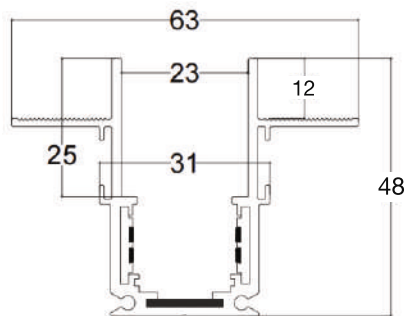



TH20

End Caps




90° Corner (C to C)

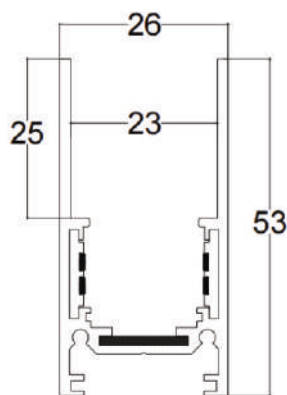

SURFACE


SUSPENDED

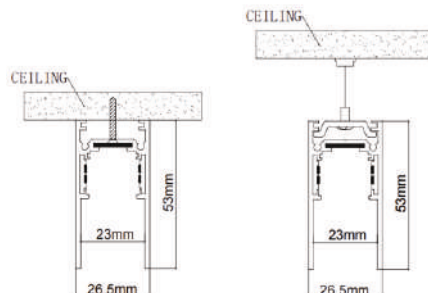

20mm MAGIC

LASER BLADE



Watt	:	10w	20w
Dimension	:	112X22X25mm	220X22X25mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	36°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	



20mm MAGIC

MOVABLE LASER BLADE

Watt	:	10w	20w
Dimension	:	112X22X90mm	220X22X90mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	36°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	

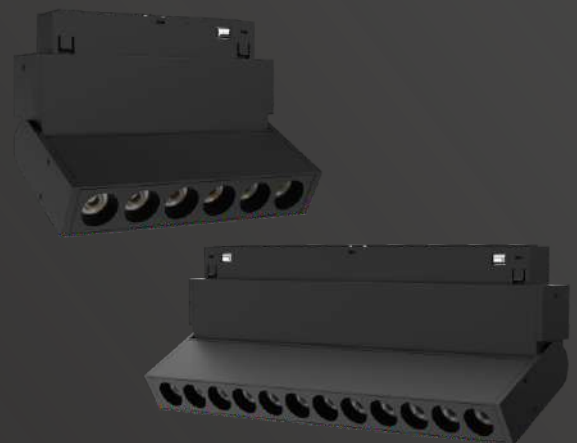

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

BK WH Body Color Available



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR




Energy Saving

20mm MAGIC

WALLWASHER



Watt	:	10w	20w
Dimension	:	132X22X42mm	246X22X42mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	36°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	

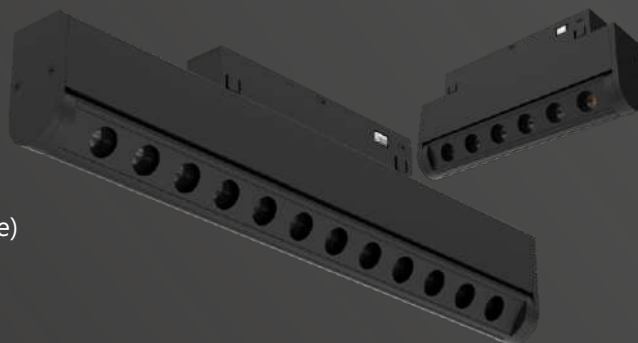

20mm MAGIC

SPOTLIGHT

Watt	:	8w	16w
Dimension	:	110X22X42mm	218X22X42mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	30°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	

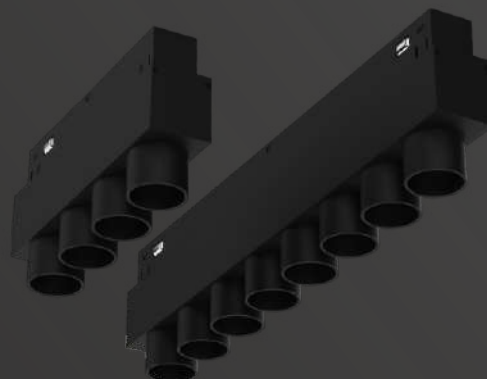

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

BK

WH

Body Color Available



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR




Energy Saving

20mm MAGIC

LINEAR DIFFUSED DOWNLIGHT


Watt	:	10w	20w
Dimension	:	203X22X25mm	303X22X25mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable) Note : 2700/3500/5000k (available on request)	
Beam Angle	:	120°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	

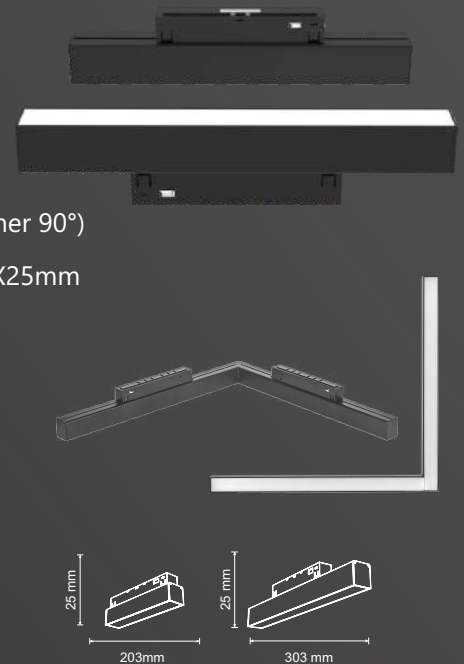

20mm MAGIC

MOVABLE LINEAR DIFFUSED DOWNLIGHT

Watt	:	10w	20w
Dimension	:	203X320X90mm	303X320X90mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable) Note : 2700/3500/5000k (available on request)	
Beam Angle	:	120°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	

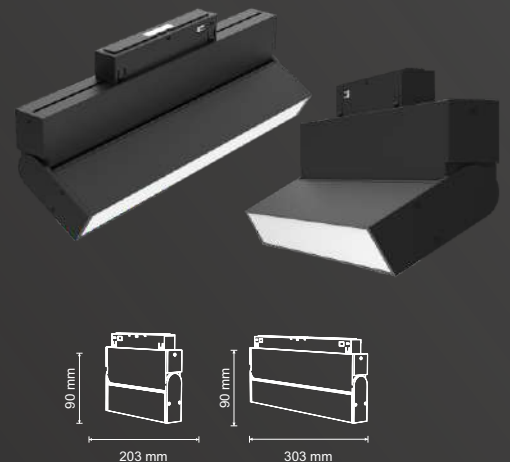

Dimming & Tuning Technology



RF 2.4G + BLE TRIAC/PHASE CUT

BK WH Body Color Available



20mm MAGIC

TRACKLIGHT

Watt	:	7w	12-15w	20w
Dimension	:	38X90X162mm	48X126X190mm	48X126X210mm
Beam Angle	:	24/36/55°	24/36/55°	26/36/55°



NEW
ARRIVAL

MAGIC

CONCEALED TRACKLIGHT

Watt	:	7w	12-15w
Dimension	:	38X90X150mm	48X126X180mm
Cut Out	:	52mm	52mm
Beam Angle	:	24/36°	24/36/55°




NEW
ARRIVAL

MAGIC

SURFACE TRACKLIGHT

Watt	:	7w	12-15w
Dimension	:	38X90X160mm	48X126X190mm
Beam Angle	:	24/36/55°	24/36/55°
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable) Note : 2700/3500/5000k (available on request)	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	

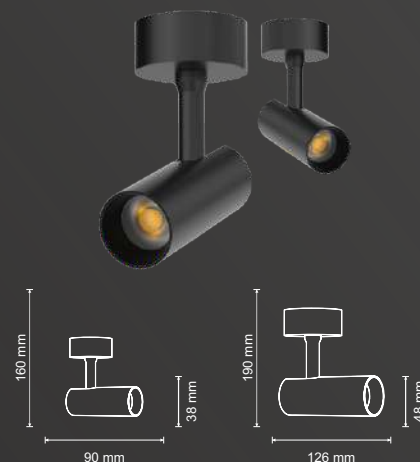

BK **WH** Body Color Available



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR



Energy Saving

20mm MUSEUM

DEGREE ADJUSTABLE TRACKLIGHT




Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Type	:	Magnetic	Concealed	Surface
Watt	:	12w	12w	12w
Dimension	:	47X195X115mm	47X195X130mm	47X195X130mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)		
Note : 2700/3500/5000k (available on request)				
Beam Angle	:	25-36°		
CRI	:	80/90 (available on request)		
Material	:	Aluminium		
LED Brand	:	Bridgelux/Lumware or Equivalent		



NEW
ARRIVAL



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR



Energy Saving

20mm MAGIC

20mm Tube

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Watt (Size)	:	10w (1mtr.)	15w (2mtr.)
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
CRI	:	80/90 (available on request)	
LED Brand	:	Bridgelux/Lumware or Equivalent	

NEW
ARRIVAL



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR



Energy Saving

20mm HANGING



DESIRE

IRIS

Dimming & Tuning Technology



RF 2.4G + BLE  TRIAC/PHASE CUT

BK WH Body Color Available

Type	:	Desire		
Watt	:	7w	12w	20w
Dimension	:	56X75mm	64X85mm	70X95mm
Beam Angle	:	24/36/55°	24/36/55°	24/36/55°

Type	:	Iris
Watt	:	12w
Dimension	:	40X304.8mm
Beam Angle	:	24/36/55°

LED Brand	:	Bridgelux/Lumware or Equivalent
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable) Note : 2700/3500/5000k (available on request)
CRI	:	80/90 (available on request)
Material	:	Aluminium



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR



Energy Saving

20mm HANGING



IGNITE

Dimming & Tuning Technology



RF 2.4G + BLE  TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	8w	15w	22w
Dimension	:	90X75mm	110X75mm	125X75mm
Beam Angle	:	110°	110°	110°

CCT (K) : 3000k/4000k/6500k/3000-6500k(Tunable)

Note : 2700/3500/5000k (available on request)

Beam Angle : 15/24°

CRI : 80/90 (available on request)

Material : Aluminium



Upto 4KV
Surge



Flicker Free



Anti Glare




Low UGR



Energy Saving

20mm MAGIC

MAGIC ACCESSORIES

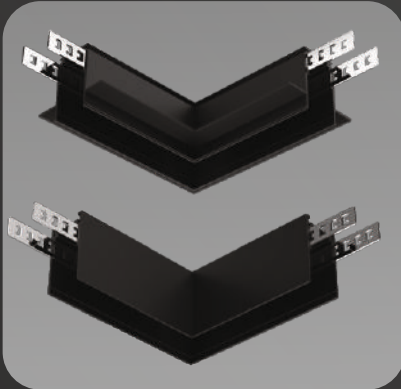

90° TC & TH Corner



TC & TH Curve Corner



Plus TC & TH Corner



T TC & TH Corner



TC Power Supply



TH Power Supply



DC Connector



DC Connector




TC & TH End Caps




10mm MAGIC

MAGNETIC TRACK SERIES

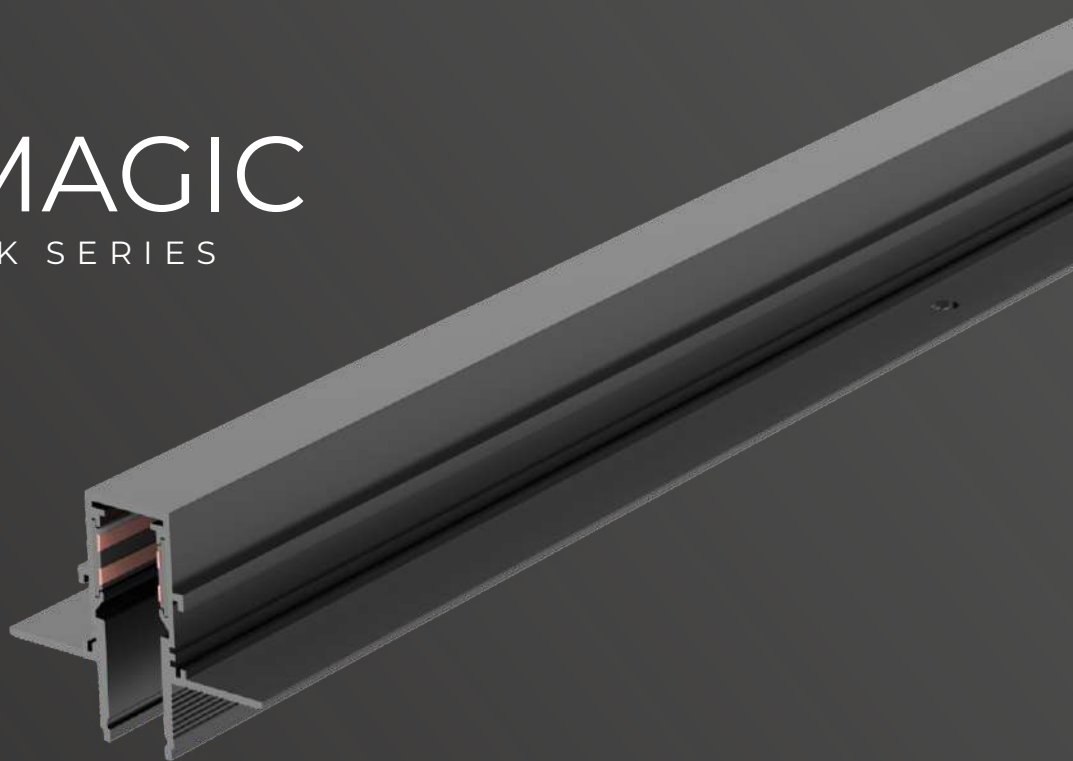


Concealed



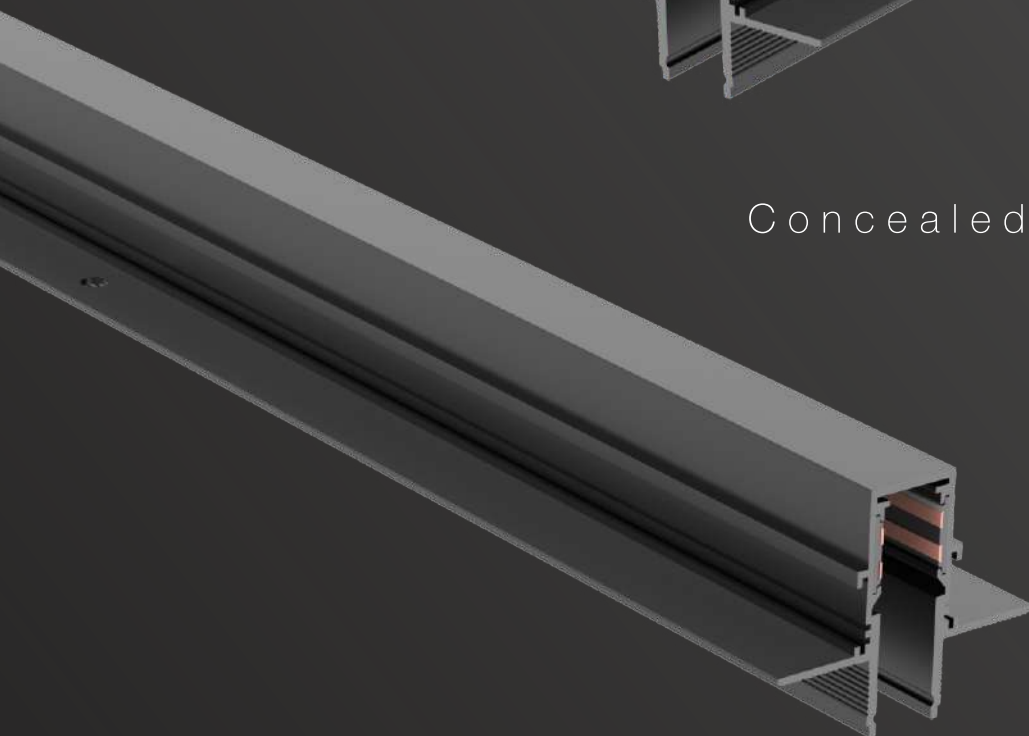


NEW
ARRIVAL

End Caps





90° Corner (C to C)

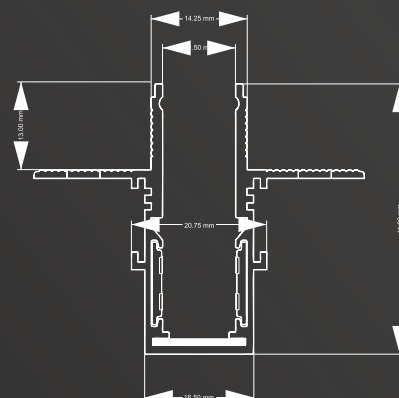

10mm MAGIC

LASER BLADE

Watt	:	12w	18w
Dimension	:	290X11X39mm	420X11X39mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	30°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	


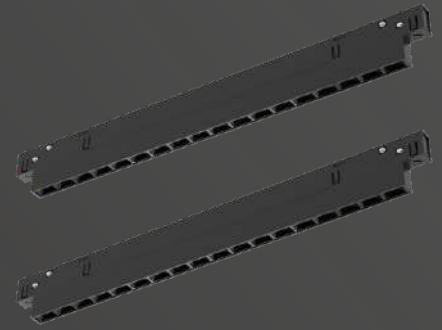


NEW
ARRIVAL

10mm MAGIC

LASER BLADE

Watt	:	5w	10w
Dimension	:	100X73X11mm	195X73X11mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	30°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	

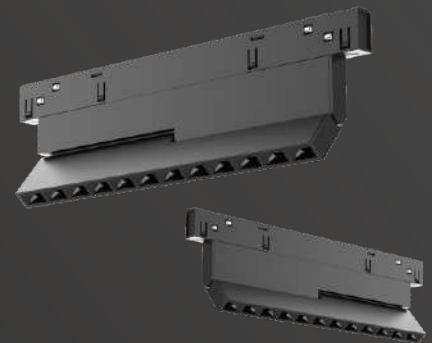

Dimming & Tuning Technology



RF 2.4G + BLE TRIAC/PHASE CUT



Upto 4KV
Surge



Flicker Free



Anti Glare



Low UGR





Energy Saving

10mm MAGIC

LINEAR DIFFUSED DOWNLIGHT

Watt	:	8w	12w
Dimension	:	300X11X39mm	450X11X39mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable) Note : 2700/3500/5000k (available on request)	
Beam Angle	:	100°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	

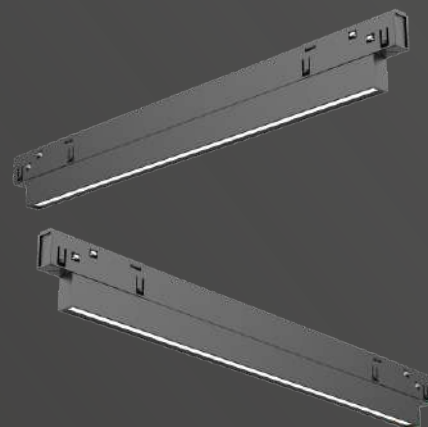


**NEW
ARRIVAL**

10mm MAGIC

TRACK LIGHT

Watt	:	7w	12w
Dimension	:	90X82X35mm	110X88X45mm
CCT (K)	:	3000k/4000k/6500k/3000-6500k(Tunable) Note : 2700/3500/5000k (available on request)	
Beam Angle	:	36°	
CRI	:	80/90 (available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux/Lumware or Equivalent	



Dimming & Tuning Technology



RF 2.4G + BLE TRIAC/PHASE CUT



Upto 4KV
Surge



Flicker Free



Anti Glare




Low UGR




Energy Saving

10mm MAGIC

MAGIC ACCESSORIES

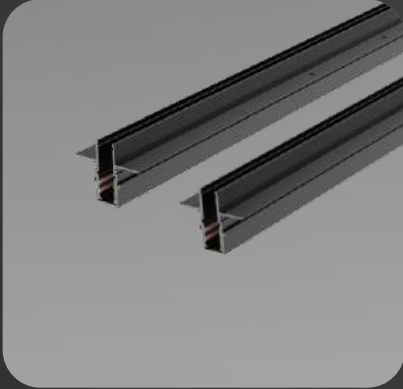


TC Track

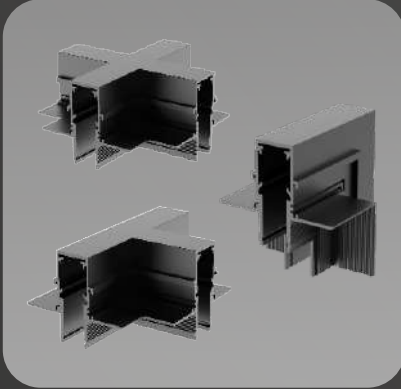


TC Corner



Blade

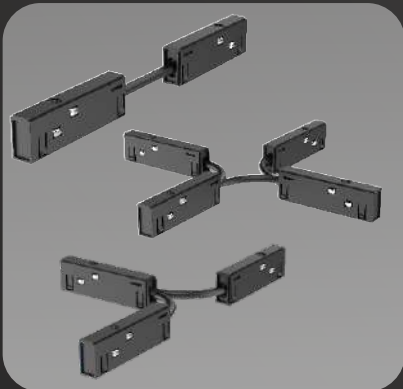

DC Connector

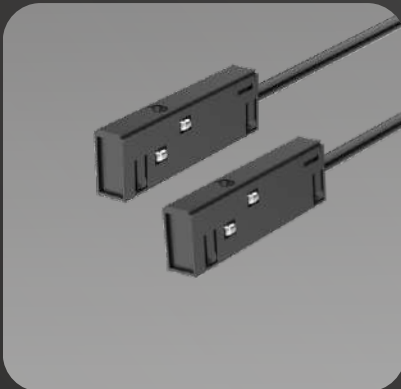

DC Connector



END Caps



Power Supply



Hanging Set

REMOTE


REMOTE CONTROLLER



SCENE SWITCH

SCENE CONTROLLER

GATEWAY BLE

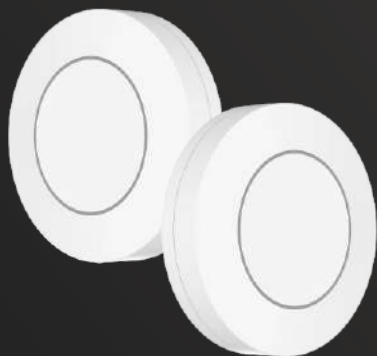


NEW
ARRIVAL

REMOTE


BUTTON REMOTE

OUR CLIENTS

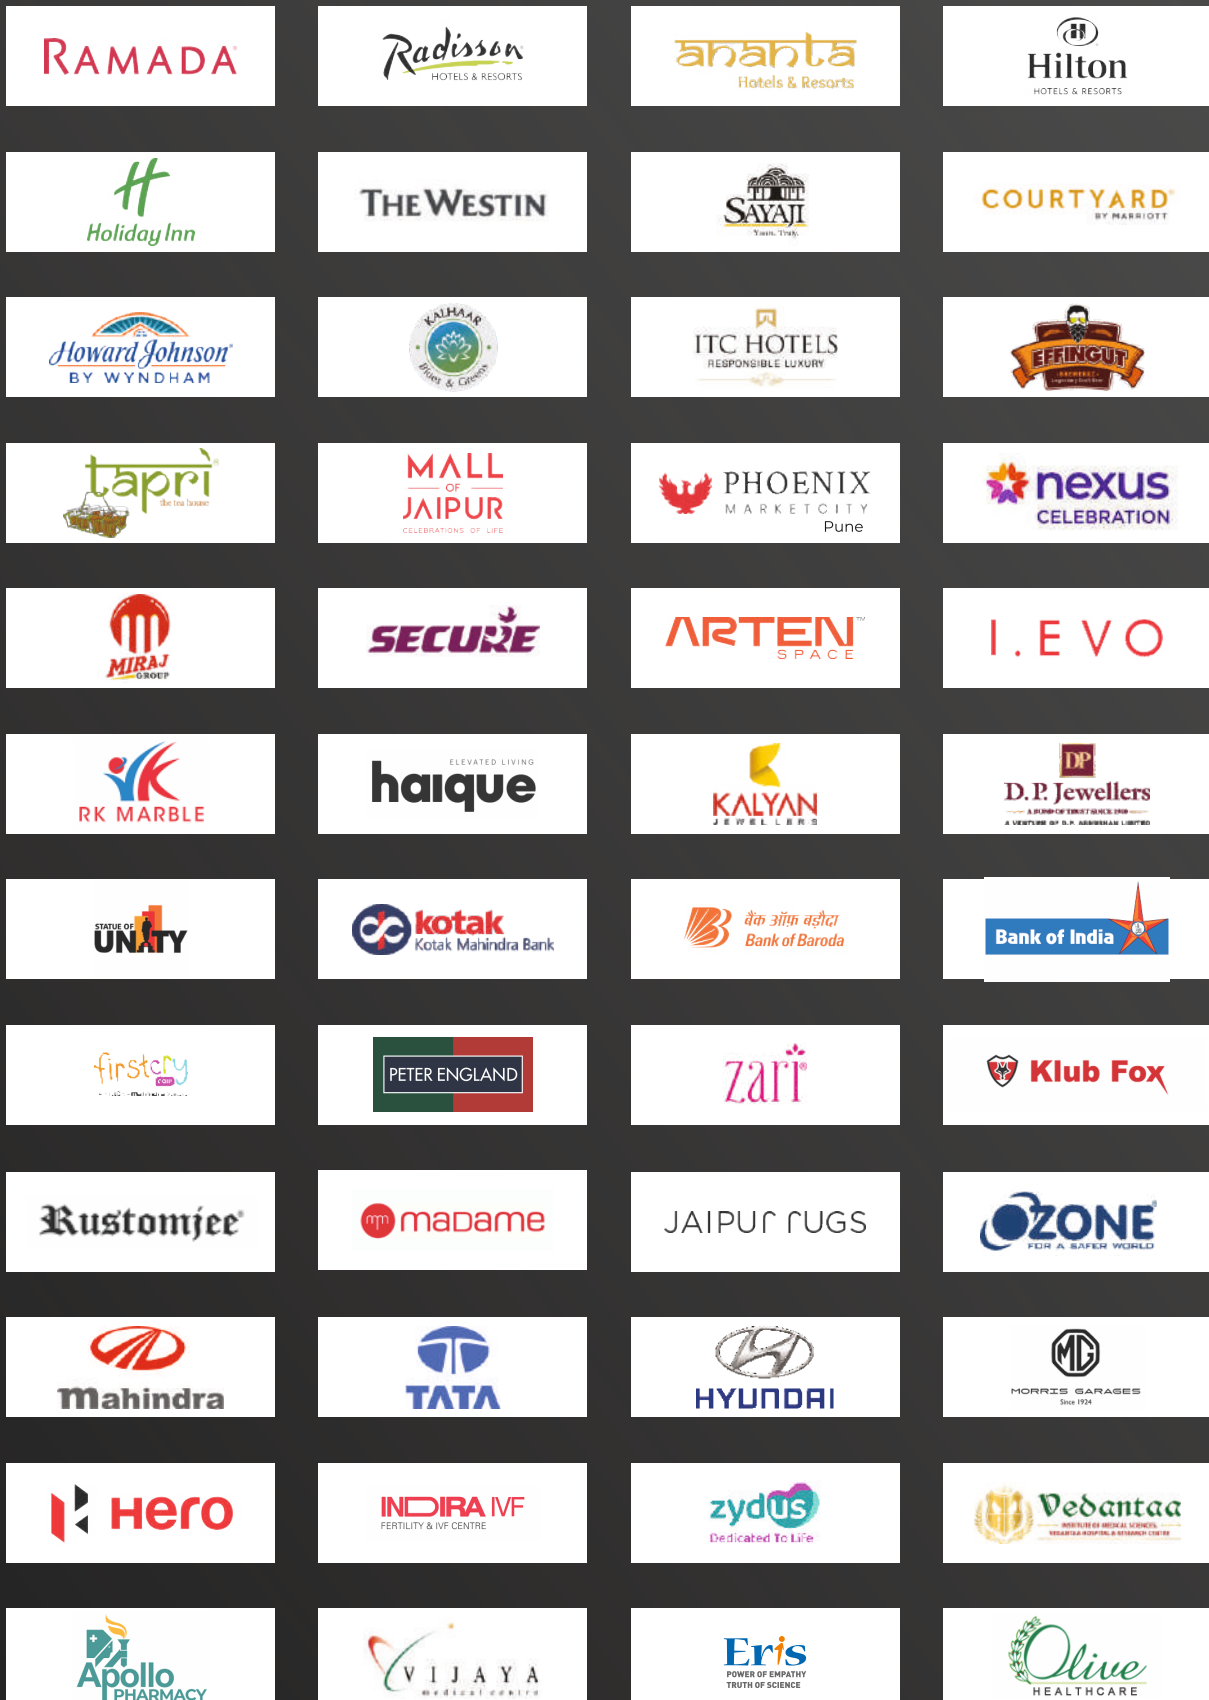



WHERE LIGHT
BECOMES THE
MASTERPIECE

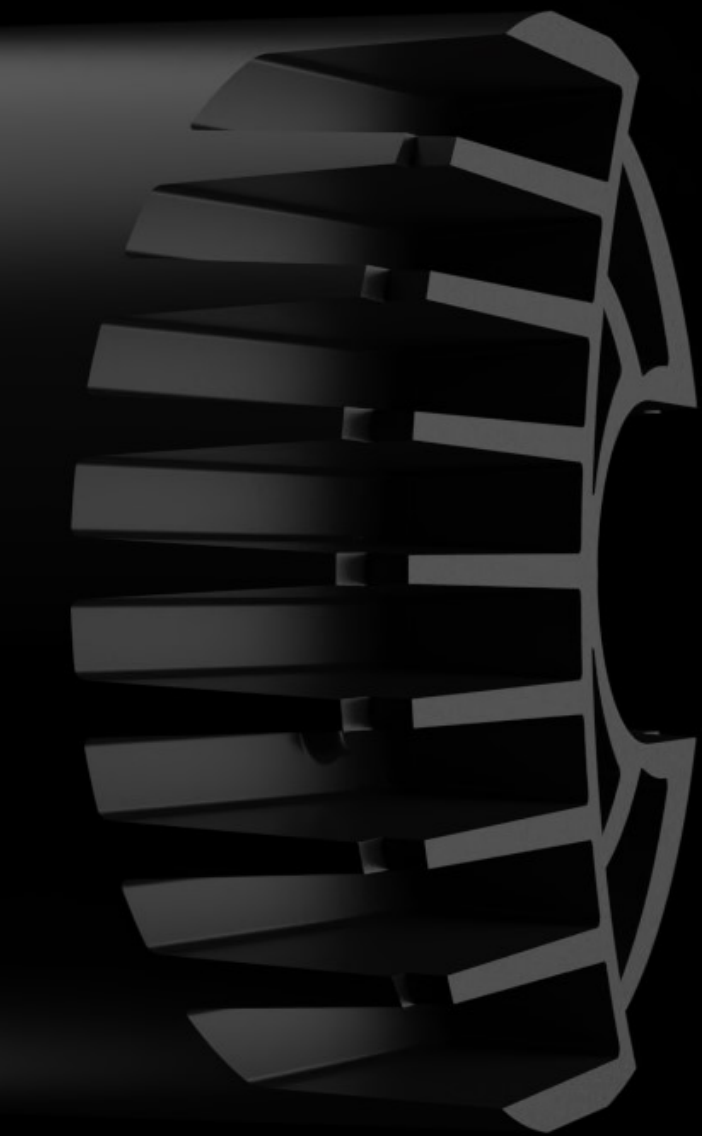

SIMPLIFIED INTELLIGENT LIGHTING