



HAVELLS

Havells  Lighting

Better light. Better life.



HOME ART LIGHTS

Architectural Lights





The Havells range of Home Art Lights are so aesthetically superior that you will be mesmerized by their beauty. Whether you turn them off or on; keep beauty switched on forever in your home. The range, designed keeping in mind the exquisite tastes & preferences of consumers, has something for your every desire.

From intricate and ornate to minimal contemporary designs, Home Art Lights serve to uplift the decor of any room they are placed in.

C O N T E N T S	ARICA SPOTLIGHT	4-5
	AZAR SPOTLIGHT	6-7
	EMPIRIA SPOTLIGHT	8-9
	AZSTRO DOWNLIGHT	10-11
	AZSTRO SPOT LIGHTS	12-13
	FLOURES SURFACE SPOTLIGHT	14-15
	UNISPOT/DUOSPOT SURFACE SPOTLIGHT	16-17
	STREEK TRACKLIGHT	18-21
	LUMINATO PANEL	22-23

ARICA SPOTLIGHT



FEATURES

- Ultra compact design with different reflector color options that merge with the ceiling
- Elegant aluminum heat sink design for effective heat dissipation
- Deep reflector with high grade lens for precise beam angle and glare-free light
- Focused beam angle to highlight object and artifacts

APPLICATIONS

Modern Homes
Restaurants
Hotel Lobbies
Retail Showrooms


ARICA SPOTLIGHT



Ordering Code	System Power (W)	Power Factor	THD (%)	Colour Temp. (CCT)	CRI	System Lumen (lm)	Color of Reflector	Beam Angle (°)	Case lot No. of unit/s
LHEEAHPAPG1K007	7.5 W	≥0.95	<10%	2700 K	>80	550 lm	Black	24°	12 N
LHEEAHPDPG1K007	7.5 W	≥0.95	<10%	4000 K	>80	550 lm	Black	24°	12 N
LHEEAHPBPG1W007	7.5 W	≥0.95	<10%	2700 K	>80	550 lm	White	24°	12 N
LHEEAHPDPG1W007	7.5 W	≥0.95	<10%	4000 K	>80	550 lm	White	24°	12 N
LHEEAHPAPG1K012	13 W	≥0.95	<10%	2700 K	>80	950 lm	Black	30°	8 N
LHEEAHPDPG1K012	13 W	≥0.95	<10%	4000 K	>80	950 lm	Black	30°	8 N
LHEEAHPBPG1W012	13 W	≥0.95	<10%	2700 K	>80	950 lm	White	30°	8 N
LHEEAHPDPG1W012	13 W	≥0.95	<10%	4000 K	>80	950 lm	White	30°	8 N

All fixtures are suitable for 240 V.

TECHNICAL DRAWING

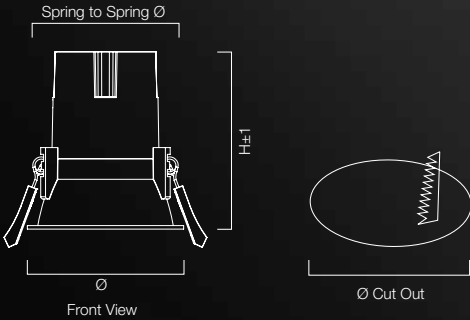

DIMENSION


System Power (W)	Spring to Spring Ø	Ø	Height (h)	Cutout Size
7.5 W	64 mm	70 mm	80 mm	65 mm
13 W	84 mm	93 mm	100 mm	85 mm

All dimensions are in mm | Tolerance: ± 1 mm



Premium category of spotlight with compact design, trimless housing that seamlessly merges with the ceiling. Its great colour and light quality adds value to your home décor.

AZAR SPOTLIGHT

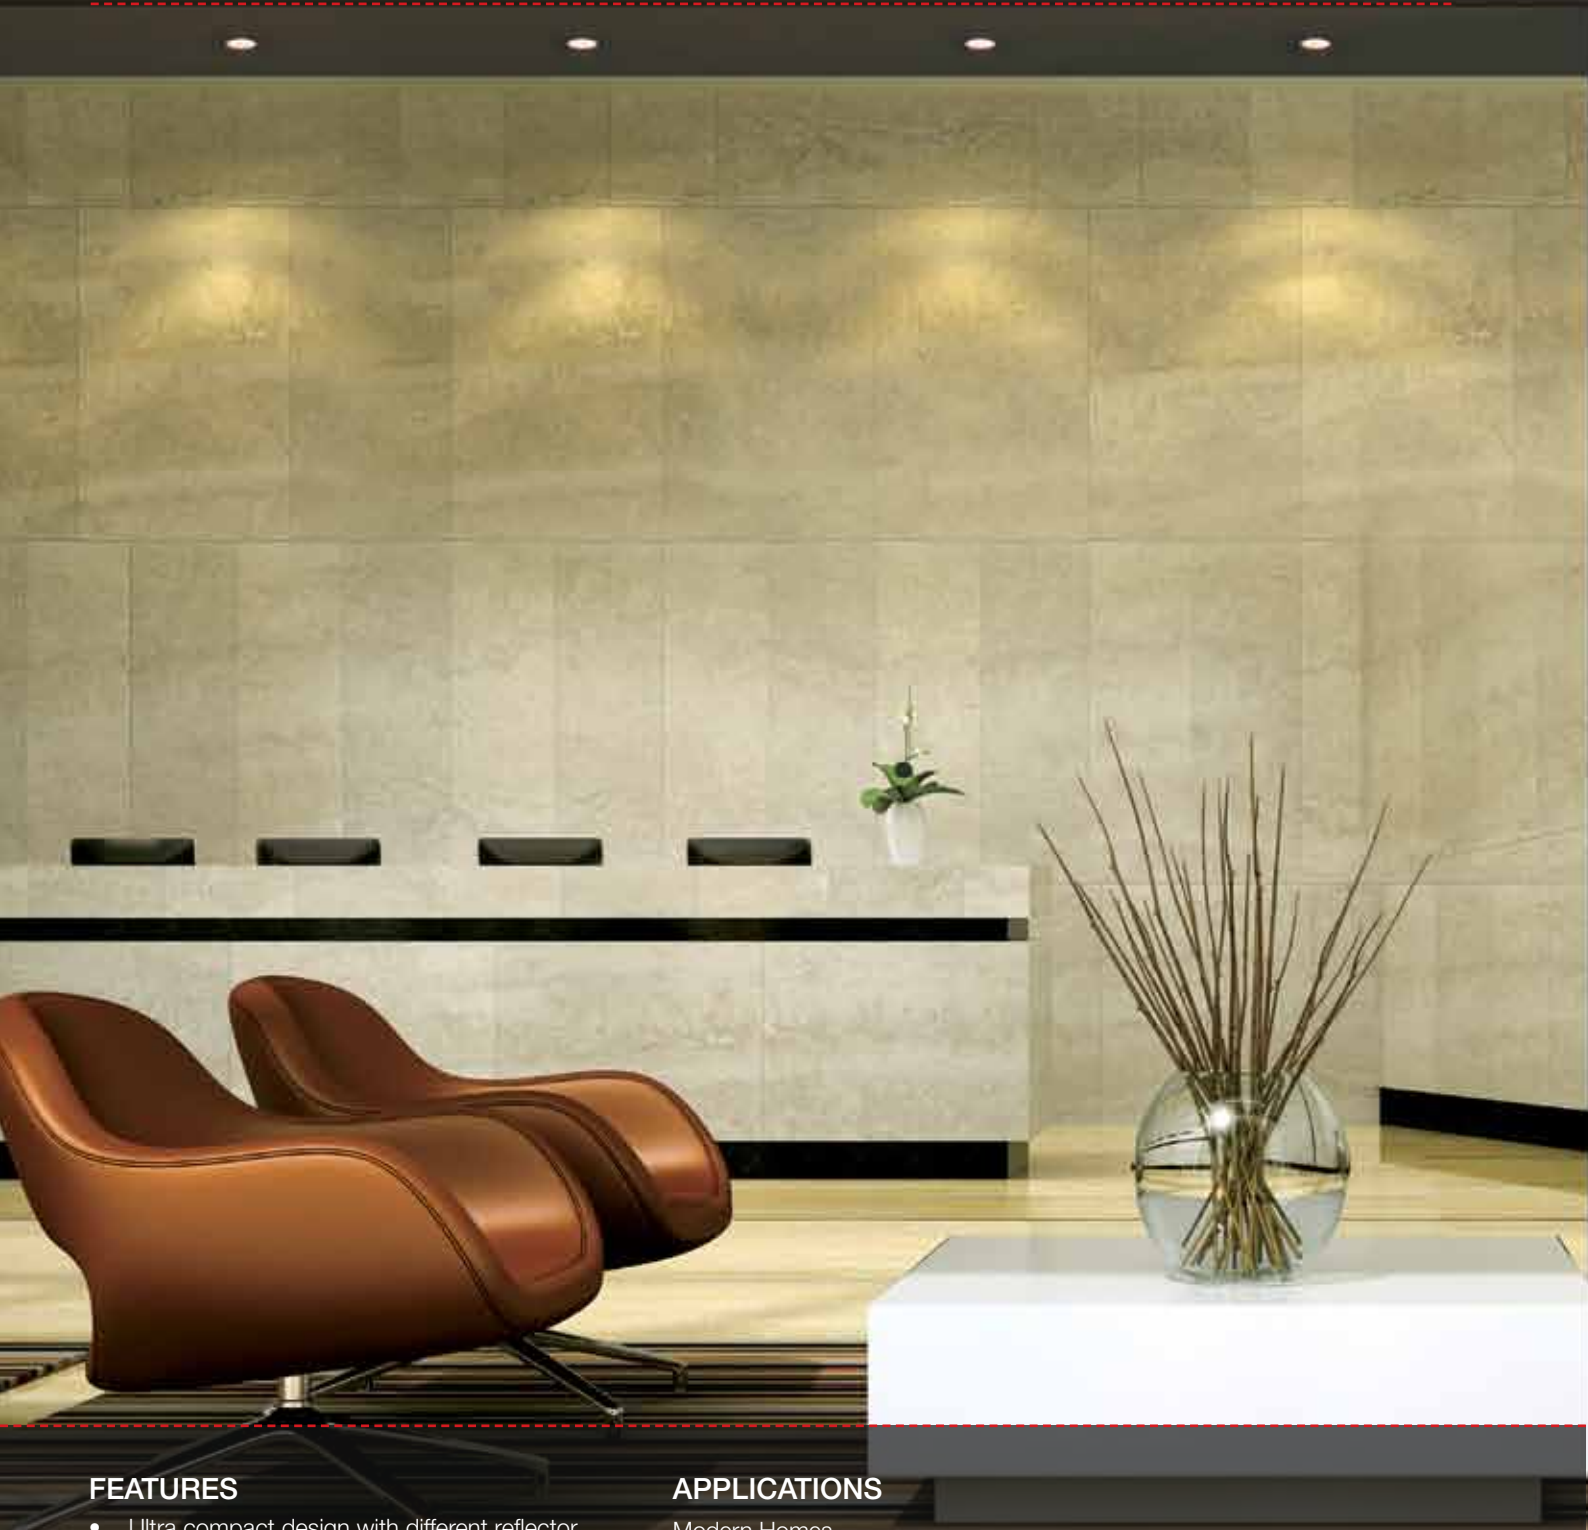

FEATURES

- Ultra compact design with different reflector color options that merge with the ceiling
- Elegant aluminum heat sink design for effective heat dissipation
- Deep reflector with high grade lens for precise beam angle and glare-free light
- Focused beam angle to highlight object and artifacts

APPLICATIONS

Modern Homes
Restaurants
Hotel Lobbies
Retail Showrooms


AZAR SPOTLIGHT



Ordering Code	System Power (W)	Power Factor	THD (%)	Colour Temp. (CCT)	CRI	System Lumen (lm)	Color of Reflector	Beam Angle (°)	Case lot No. of unit/s
LHEEAIPBPG1K007	7.5 W	≥0.95	<10%	2700 K	>80	550 lm	Black	36°	12 N
LHEEAIPDPG1K007	7.5 W	≥0.95	<10%	4000 K	>80	550 lm	Black	36°	12 N
LHEEAIPBPG1W007	7.5 W	≥0.95	<10%	2700 K	>80	550 lm	White	36°	12 N
LHEEAIPDPG1W007	7.5 W	≥0.95	<10%	4000 K	>80	550 lm	White	36°	12 N

All fixtures are suitable for 240 V.

TECHNICAL DRAWING

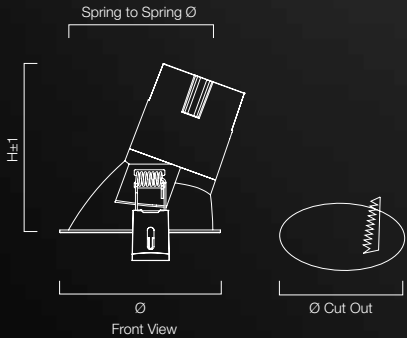

DIMENSION

System Power (W)	Spring to Spring ø	ø	Height (h)	Cutout Size
7.5 W	75 mm	84 mm	86 mm	76 mm

All dimensions are in mm | Tolerance: ± 1 mm



Premium category of spotlight with compact design, trimless housing that seamlessly merges with the ceiling. Its great colour and light quality adds value to your home décor.

EMPIRIA SPOTLIGHT



FEATURES

- Ultra compact design with different reflector color options that merge with the ceiling
- Elegant aluminum heat sink design for effective heat dissipation
- Deep reflector with high grade lens for precise beam angle and glare-free light
- Focused beam angle to highlight object and artifacts

APPLICATIONS

Modern Homes
Restaurants
Hotel Lobbies
Retail Showrooms


EMPIRIA SPOTLIGHT



Ordering Code	System Power (W)	Power Factor	THD (%)	Colour Temp. (CCT)	CRI	System Lumen (lm)	Color of Reflector	Beam Angle (°)	Case lot No. of unit/s
LHEEAJPBPG1K012	13 W	≥0.95	<10%	2700 K	>80	950 lm	Black	30°	8 N
LHEEAJPDPG1K012	13 W	≥0.95	<10%	4000 K	>80	950 lm	Black	30°	8 N
LHEEAJPBPG1W012	13 W	≥0.95	<10%	2700 K	>80	950 lm	White	30°	8 N
LHEEAJPDPG1W012	13 W	≥0.95	<10%	4000 K	>80	950 lm	White	30°	8 N

All fixtures are suitable for 240 V.

TECHNICAL DRAWING

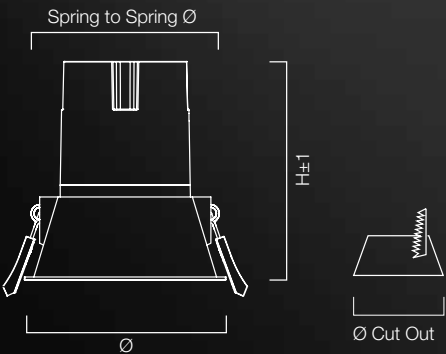

DIMENSION

System Power (W)	Spring to Spring ø	Length (l)	Width (w)	Height (h)	Cutout Size
13 W	84 mm	93 mm	93 mm	94.5 mm	85 mm x 85 mm

All dimensions are in mm | Tolerance: ± 1 mm



Premium category of spotlight with compact design, trimless housing that seamlessly merges with the ceiling. Its great colour and light quality adds value to your home décor. Ideally suited for low ceiling areas for glare-free light.

AZSTRO DOWNLIGHT



FEATURES

- Black housing design with different reflector color options that merge with the ceiling
- Elegant aluminum heat sink design for effective heat dissipation
- Deep reflector with high grade lens for precise beam angle and glare-free light
- Focused beam angle to highlight object and artifacts

APPLICATIONS

Modern Homes
Restaurants
Hotel Lobbies
Retail Showrooms


AZSTRO DOWNLIGHT



Ordering Code	System Power (W)	Power Factor	THD (%)	Colour Temp. (CCT)	CRI	System Lumen (lm)	Color of Reflector	Beam Angle (°)	Case lot No. of unit/s
LHEBAFPAIE1K007	7.5 W	≥0.95	<10%	2700 K	>80	550 lm	BLACK	30°	12 N
LHEBAFPDIE1K007	7.5 W	≥0.95	<10%	4000 K	>80	550 lm	BLACK	30°	12 N
LHEBAFPAIE1K015	15 W	≥0.95	<10%	2700 K	>80	1150 lm	BLACK	30°	8 N
LHEBAFPDIE1K015	15 W	≥0.95	<10%	4000 K	>80	1150 lm	BLACK	30°	8 N
LHEBAFPAIE1K020	20 W	≥0.95	<10%	2700 K	>80	1800 lm	BLACK	30°	8 N
LHEBAFPDIE1K020	20 W	≥0.95	<10%	4000 K	>80	1800 lm	BLACK	30°	8 N

All fixtures are suitable for 240 V.
Inner rings available in color White /Copper /Gold and Black

TECHNICAL DRAWING

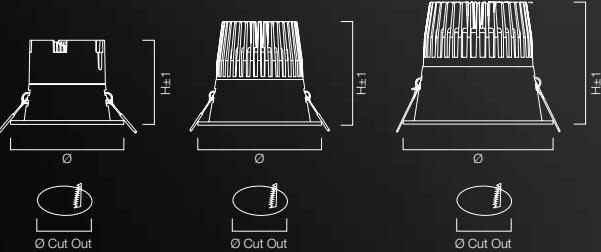

DIMENSION

System Power (W)	Spring to Spring ø	ø	Height (h)	Cutout Size
7.5 W	64 mm	75 mm	55 mm	65 mm
15 W	84 mm	95 mm	80 mm	85 mm
20 W	104 mm	115 mm	95 mm	105 mm

All dimensions are in mm | Tolerance: ± 1 mm

AZSTRO RING

SAP Code	Product Description
LSSLNW0173	Azstro Ring attachment 7 W White
LSSLNA0017	Azstro Ring attachment 7 W Copper
LSSLNY0017	Azstro Ring attachment 7 W Gold
LSSLNW0174	Azstro Ring attachment 15 W White
LSSLNA0018	Azstro Ring attachment 15 W Copper
LSSLNY0018	Azstro Ring attachment 15 W Gold
LSSLNW0175	Azstro Ring attachment 20 W White
LSSLNA0019	Azstro Ring attachment 20 W Copper
LSSLNY0019	Azstro Ring attachment 20 W Gold



Premium category of Downlighter with compact design It's great colour options of reflector give a choice to the consumers to match fixture with ceiling color and adds value to your home décor.

AZSTRO SPOT LIGHTS



FEATURES

- Premium design that merges with ceiling
- Effective heat sink design
- High Grade LENS based Deep Spot
- Even and comfortable light perfected for your eye comfort
- Collar available in both Fixed and Swivel
- Collar available in both White and Black Color
- Flexibility to opt for Dimmable driver

APPLICATIONS

Modern Homes
Restaurants
Hotel lobbies
Retail showroom


AZSTRO SPOT LIGHTS



Ordering Code	System Power (W)	Power Factor	THD (%)	Colour Temp. (CCT)	CRI	System Lumen (lm)	Color of Reflector	Beam Angle (°)	Case lot No. of unit/s
LHEBAFPBPB1J7X5	7.5 W	≥0.95	<10%	3000 K	>80	550 lm	Grey	24°	12 N
LHEBAFPDPB1J7X5	7.5 W	≥0.95	<10%	4000 K	>80	550 lm	Grey	24°	12 N
LHEBAFPBPZ1J013	13 W	≥0.95	<10%	3000 K	>80	975 lm	Grey	30°	8 N
LHEBAFPDPZ1J013	13 W	≥0.95	<10%	4000 K	>80	975 lm	Grey	30°	8 N
DIMMABLE DRIVER									
LSSLNW0218	7.5 W	≥0.95	<33%	-	-	-	-	-	12 N
LSSLNW0219	13 W	≥0.95	<10%	-	-	-	-	-	12 N
NON DIMMABLE DRIVER									
LSSLNW0220	7.5 W	≥0.95	<10%	-	-	-	-	-	12 N
LSSLNW0221	13 W	≥0.95	<10%	-	-	-	-	-	12 N

All fixtures are suitable for 240 V.

TECHNICAL DRAWING



DIMENSION

System Power (W)	ø	Height (h)	Cutout Size
7.5 W	60 mm	82 mm	55 mm
13 W	82 mm	100 mm	75 mm

All dimensions are in mm | Tolerance: ± 1 mm

AZSTRO RING

SAP Code	Product Description	System lumens	Case lot No. of unit/s
LSSLNB0036	Azstro Module Ring 7.5 W Fixed BLK	Fixed	24 N
LSSLNW0214	Azstro Module Ring 7.5 W Fixed WHT	Fixed	24 N
LSSLNW0215	Azstro Module Ring 7.5 W Swivel BLK	Swivel	24 N
LSSLNB0037	Azstro Module Ring 7.5 W Swivel WHT	Swivel	24 N
LSSLNB0038	Azstro Module Ring 13 W Fixed BLK	Fixed	24 N
LSSLNW0216	Azstro Module Ring 13 W Fixed WHT	Fixed	24 N
LSSLNB0039	Azstro Module Ring 13 W Swivel BLK	Swivel	24 N
LSSLNW0217	Azstro Module Ring 13 W Swivel WHT	Swivel	24 N



Premium Category of Spot light with compact design It's great colour options of reflector give a choice to the consumers to match fixture with ceiling color and adds value to your home décor.

FLOURES SURFACE SPOTLIGHT



FEATURES

- Surface mounted fixture with compact and decorative design
- Available with different finish and color options that merge with ceiling
- Aluminum heat sink for better heat dissipation

APPLICATIONS


Modern Homes
Restaurants
Hotel Lobbies
Retail Showrooms

FLOURES SURFACE SPOTLIGHT

Ordering Code	System Power (W)	Power Factor	THD (%)	Colour Temp. (CCT)	CRI	System Lumen (lm)	Color of Reflector	Beam Angle (°)	Case lot No. of unit/s
LHEEAKPDIE1W007	7 W	≥0.95	<10%	4000 K	>75	525 lm	Wahite	36°	12 N
LHEEAKPDIE1K007	7 W	≥0.95	<10%	4000 K	>75	525 lm	Black	36°	12 N
LHEEAKPDIE1H007	7 W	≥0.95	<10%	4000 K	>75	525 lm	Antic Bronze	36°	12 N
LHEEAKPDIE1T007	7 W	≥0.95	<10%	4000 K	>75	525 lm	Antic Brass	36°	12 N
LHEEAKPDIE1K012	12 W	≥0.95	<10%	4000 K	>80	960 lm	Black	36°	12 N
LHEEAKPDIE1W012	12 W	≥0.95	<10%	4000 K	>80	960 lm	white	36°	12 N
LHEEAKPDIE1K018	18 W	≥0.95	<10%	4000 K	>80	1530 lm	Black	36°	8 N
LHEEAKPDIE1W018	18 W	≥0.95	<10%	4000 K	>80	1530 lm	white	36°	8 N

All fixtures are suitable for 240 V.

TECHNICAL DRAWING

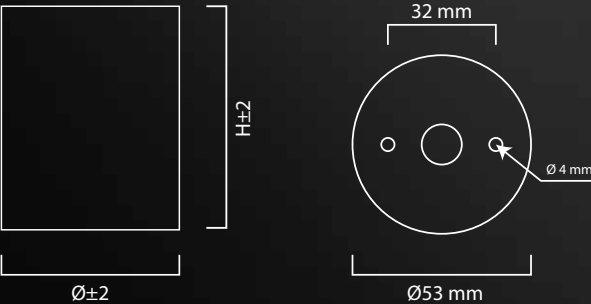

DIMENSION

System Power (W)	ø	Height (h)
7 W	56 mm	66 mm
12 W	76 mm	110 mm
18 W	96 mm	120 mm

All dimensions are in mm | Tolerance: ± 2 mm



Decorative surface mounted fixture with compact design available in different finish and colors to match with ceiling requirements.

UNISPOT / DUOSPOT SURFACE SPOTLIGHT



FEATURES

- Available with the option to mount on ceiling or on wall
- Option of single head and double head that rotates 360°
- Focused beam angle to highlight object and artifacts
- Available in black and white colour

APPLICATIONS

Modern Homes
Restaurants
Hotel Lobbies
Retail Showrooms


UNISPOT / DUOSPOT SURFACE SPOTLIGHT



Ordering Code	System Power (W)	Power Factor	THD (%)	Colour Temp. (CCT)	CRI	System Lumen (lm)	Color of Reflector	Beam Angle (°)	Case lot No. of unit/s
LHEEAFPDIG1W005	5 W	≥0.95	<10%	4000 K	>75	225 lm	Sand White	24°	8 N
LHEEAFPDIG1K005	5 W	≥0.95	<10%	4000 K	>75	225 lm	Sand Black	24°	8 N
LHEEAFPLIG1W010	10 W	≥0.95	<10%	4000 K	>75	500 lm	Sand White	24°	8 N
LHEEAFPLIG1K010	10 W	≥0.95	<10%	4000 K	>75	500 lm	Sand Black	24°	8 N

All fixtures are suitable for 240 V.

TECHNICAL DRAWING

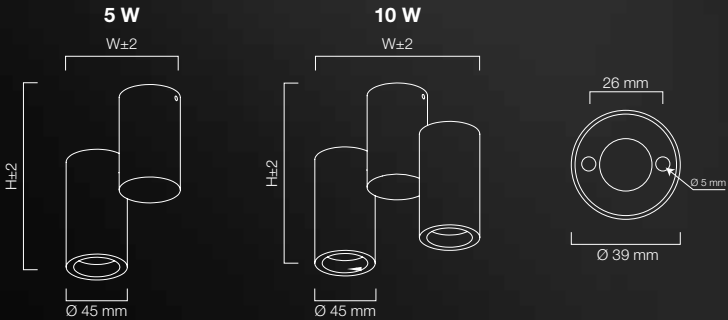

DIMENSION


System Power (W)	Ø	Height (h)
5 W	93 mm	140 mm
10 W	140 mm	140 mm

All dimensions are in mm | Tolerance: ± 2 mm



Surface Spotlight with aluminum structure, available with adjustable light engine to achieve the desired illumination angle.

STREEK TRACKLIGHT

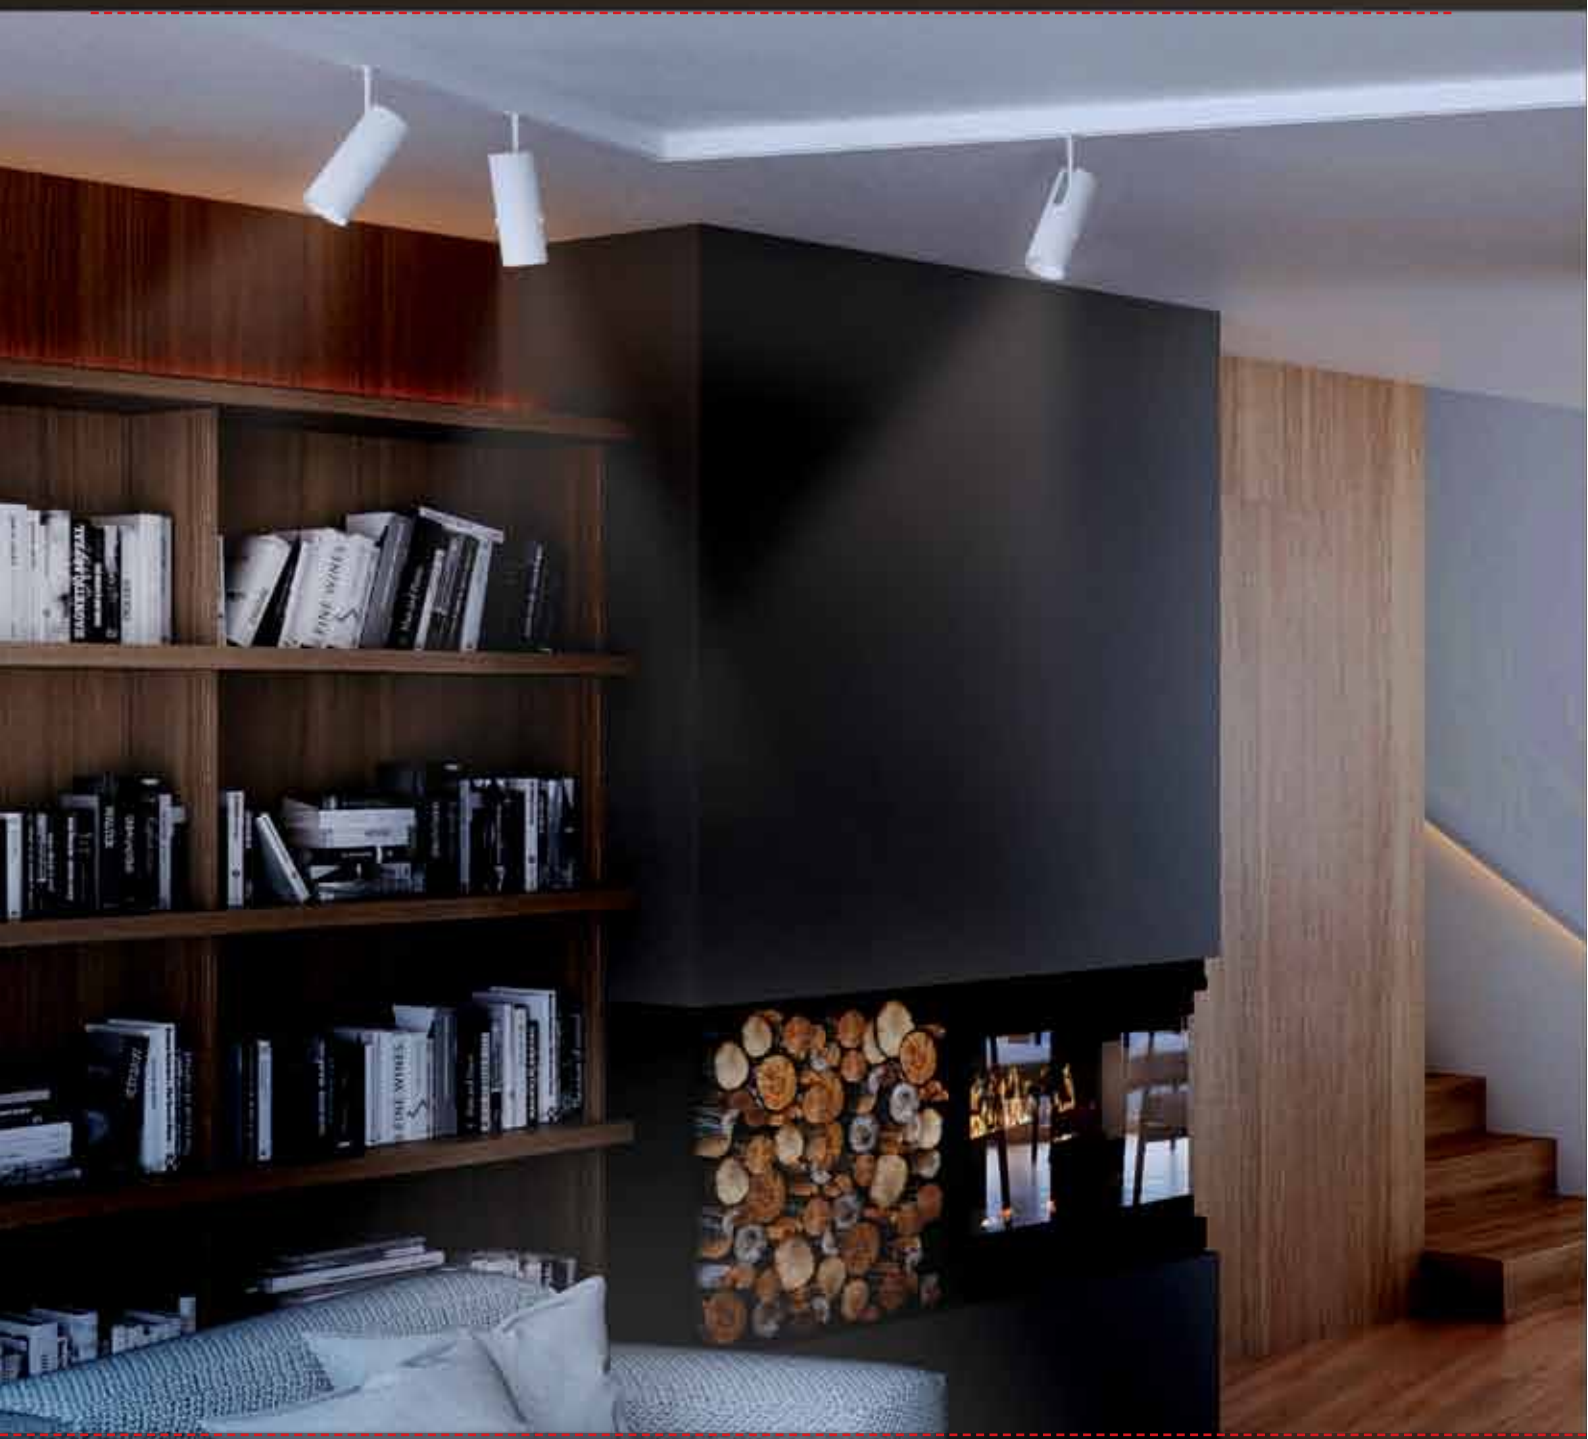

FEATURES

- Elegant aluminum heat sink design for effective heat dissipation
- High performance electronic driver ensures zero maintenance
- Focused beam angle to highlight objects and artifacts
- Available in black and white color.

APPLICATIONS

Hallways & Corridors
Kitchen
Bedroom Accent wall
Living room to highlight Painting


STREEK TRACKLIGHT



Ordering Code	System Power (W)	THD (%)	Colour Temp. (CCT)	CRI	System Lumen (lm)	Color of Reflector	Beam Angle (°)	Case lot No. of unit/s
LHEEANPBPH1K007	7 W	<10%	3000 K	>80	560 lm	Black	24°	6 N
LHEEANPBPH1W007	7 W	<10%	3000 K	>80	560 lm	White	24°	6 N
LHEEANPBPH1K012	12 W	<10%	3000 K	>80	960 lm	Black	24°	6 N
LHEEANPBPH1W012	12 W	<10%	3000 K	>80	960 lm	White	24°	6 N
LHEEANPBPH1K020	20 W	<10%	3000 K	>80	1600 lm	Black	30°	6 N
LHEEANPBPH1W020	20 W	<10%	3000 K	>80	1600 lm	White	30°	6 N
LHEEANPBPH1K030	30 W	<10%	3000 K	>80	2400 lm	Black	30°	6 N
LHEEANPBPH1W030	30 W	<10%	3000 K	>80	2400 lm	White	30°	6 N

All fixtures are suitable for 240 V.

TECHNICAL DRAWING

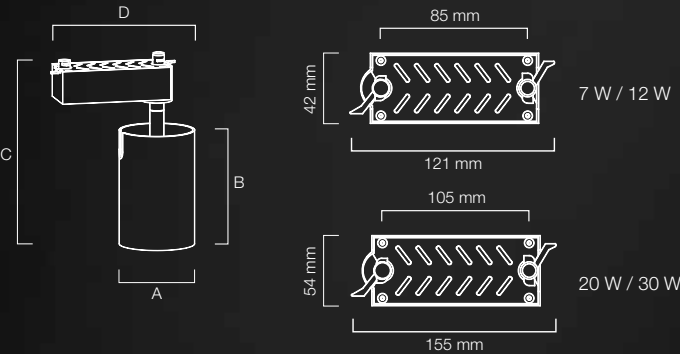

DIMENSION

System Power (W)	Diameter ±0.5 (mm) A	Height ±0.5 (mm) of housing B	Total Height ±0.5 (mm) C	Length ±0.5 (mm) D
7 W	52 mm	85 mm	150 mm	130 mm
12 W	52 mm	90 mm	165 mm	130 mm
20 W	65 mm	110 mm	190 mm	160 mm
30 W	85 mm	130 mm	210 mm	170 mm

All dimensions are in mm | Tolerance: ± 2 mm




Surface Spotlight with aluminum structure, available with adjustable light engine to achieve the desired illumination angle.

ACCESSORIES DETAILS


Product Code	Description	Case Lot
LSSLNW0192	LED STREEK Two Wire One Meter Track WHT	1
LSSLNW0193	LED STREEK Two Wire AC Supply Conn. WHT	10
LSSLNW0194	LED STREEK Two Wire "I" Connector WHT	10
LSSLNW0195	LED STREEK Two Wire "L" Connector WHT	10
LSSLNW0196	LED STREEK Two Wire "T" Connector WHT	5
LSSLNB0027	LED STREEK Two Wire One Meter Track BLK	1
LSSLNB0028	LED STREEK Two Wire AC Supply Conn. BLK	10
LSSLNB0029	LED STREEK Two Wire "I" Connector BLK	10
LSSLNB0030	LED STREEK Two Wire "L" Connector BLK	10
LSSLNB0031	LED STREEK Two Wire "T" Connector BLK	5



I Type Connector
2 wire/ Rails

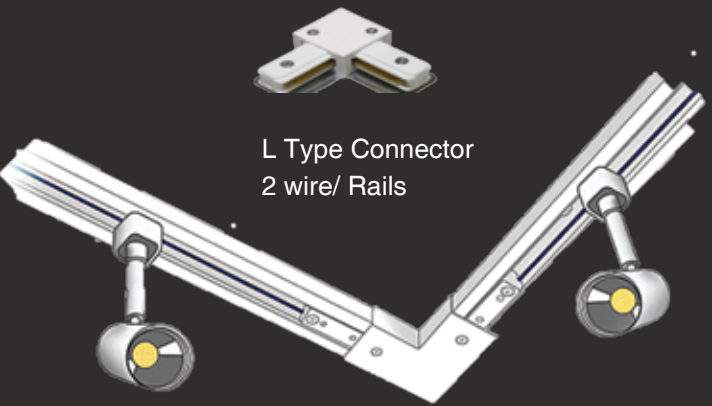

L Type Connector
2 wire/ Rails

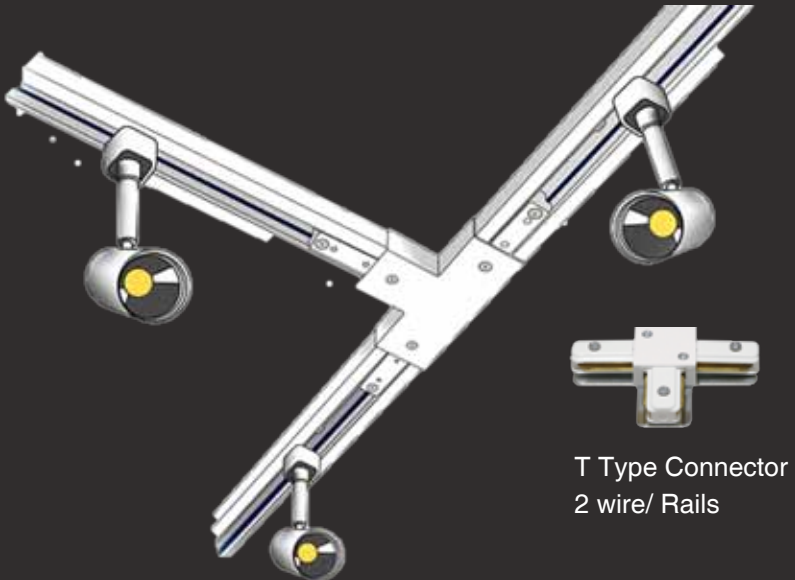


T Type Connector
2 wire/ Rails


2 wire One Meter Track WHT



Two Wire "AC" Supply
Connector WHT

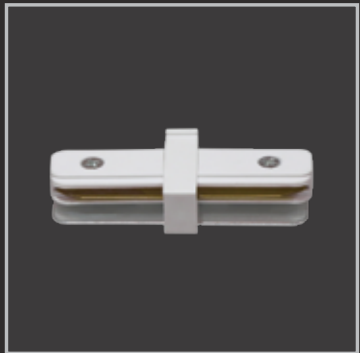

Two Wire "I" Connector WHT

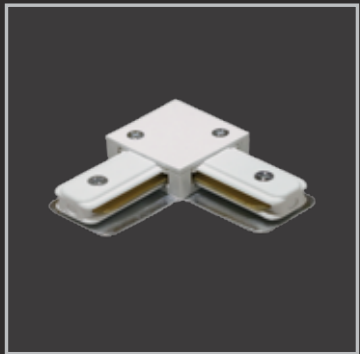


Two Wire "L" Connector WHT




Two Wire "T" Connector WHT


2 wire One Meter Track BLK

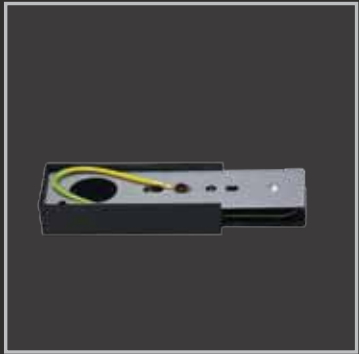

Two Wire "AC" Supply
Connector BLK

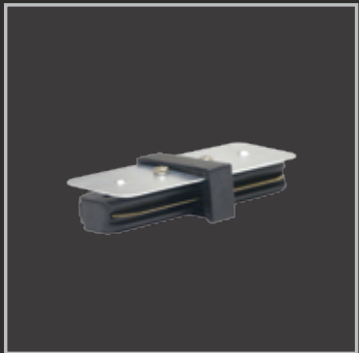

Two Wire "I" Connector BLK

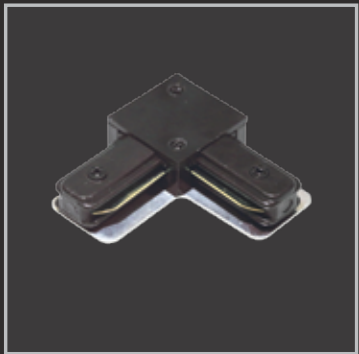


Two Wire "L" Connector BLK



Two Wire "T" Connector BLK

LUMINATO PANEL

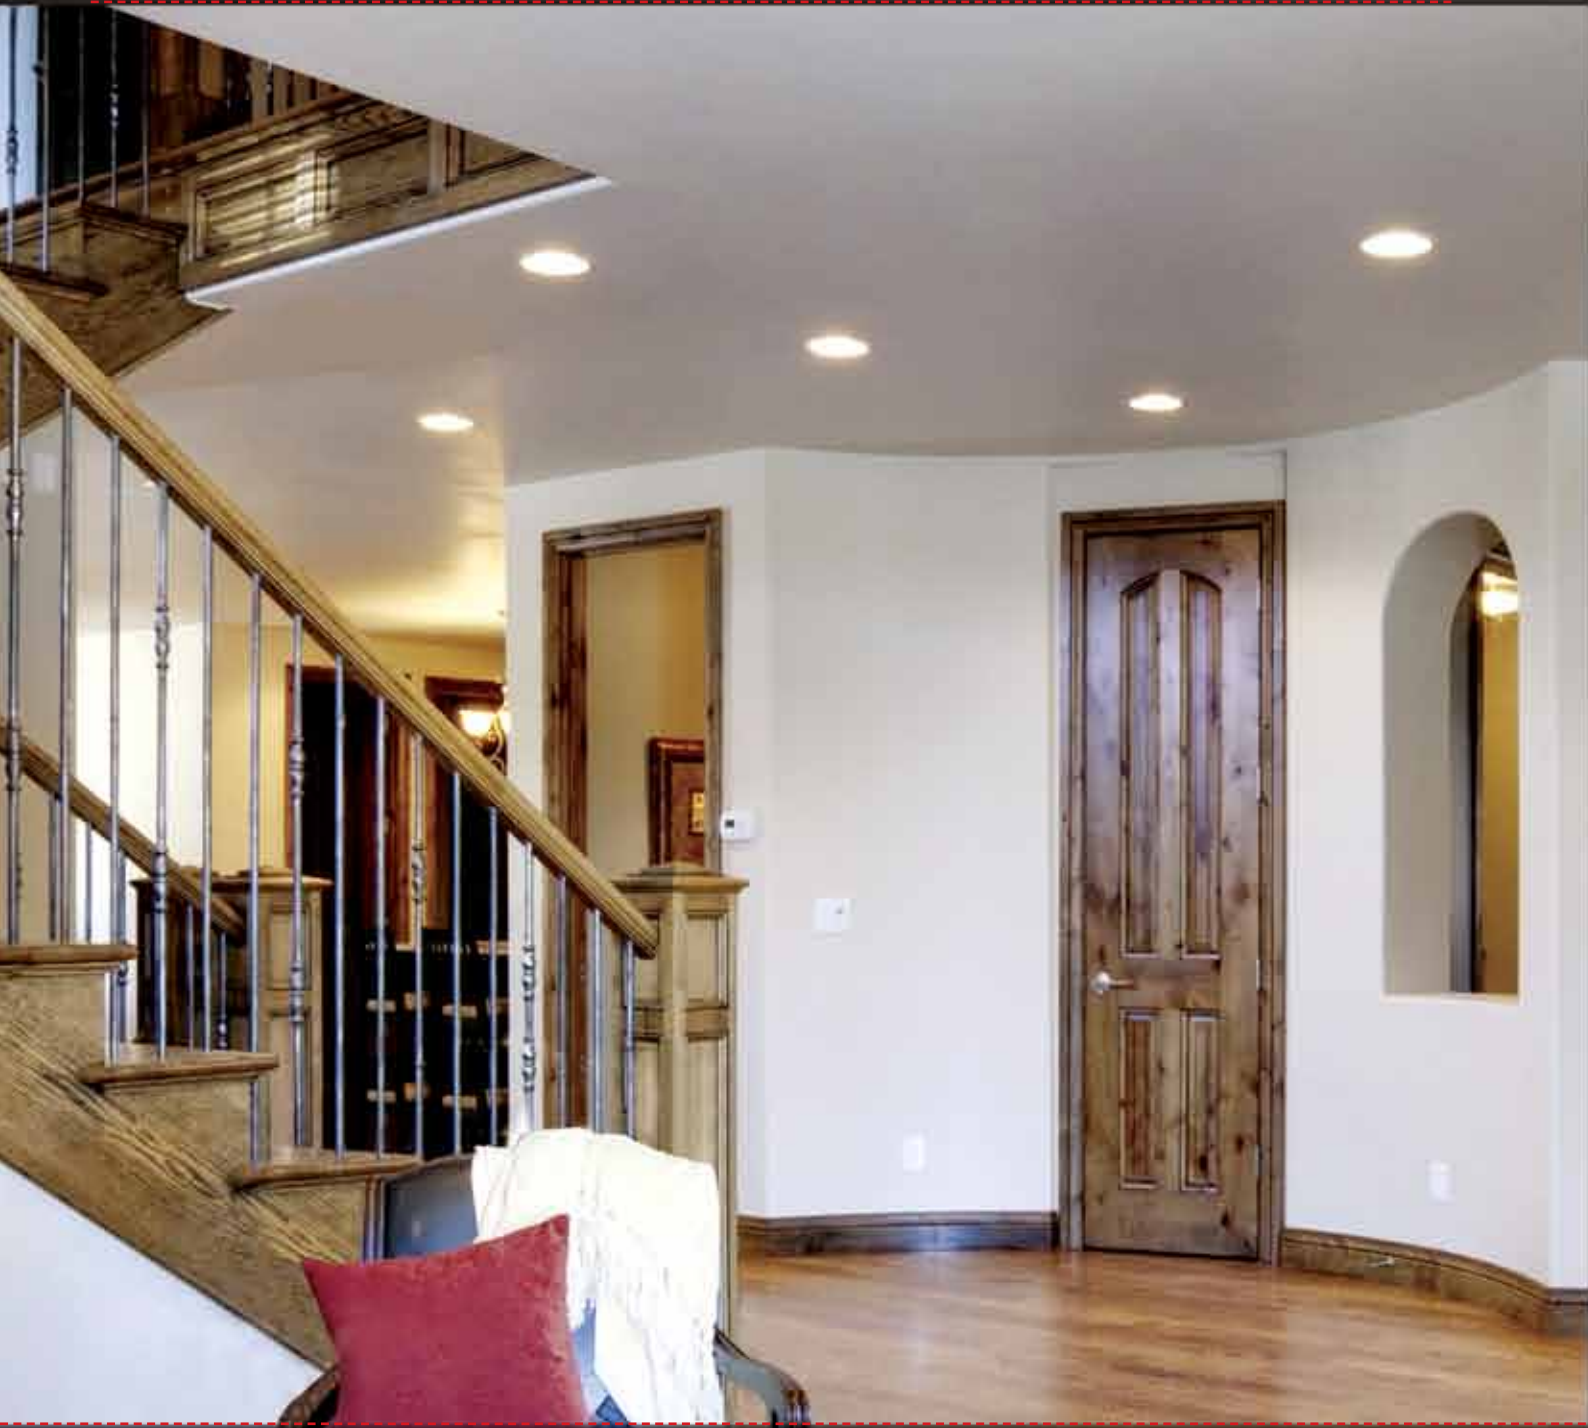

FEATURES

- Light emitted through rim enhancing the aesthetics of ceiling
- Anti-glare translucent acrylic diuser
- Premium die-cast aluminium housing

APPLICATIONS

Modern Homes
Restaurants
Hotel lobbies
Retail showroom


LUMINATO PANEL



Ordering Code	System Power (W)	Power Factor	THD (%)	Colour Temp. (CCT)	CRI	System Lumen (lm)	Color of Reflector	Beam Angle (°)	Case lot No. of unit/s
LHEAOP6PZ1W008	8 W	≥0.9	<10%	5700 K	>80	560 lm	White	115°	12 N
LHEAOP7PZ1W008	8 W	≥0.9	<10%	5700 K	>80	560 lm	White	115°	12 N
LHEAPP6PZ1W008	8 W	≥0.9	<10%	4000 K	>80	560 lm	White	115°	12 N
LHEAPP7PZ1W008	8 W	≥0.9	<10%	4000 K	>80	560 lm	White	115°	8 N
LHEBAPP5PZ1W008	8 W	≥0.9	<10%	3000 K	>80	560 lm	White	115°	8 N
LHEBAOP5PZ1W008	8 W	≥0.9	<10%	3000 K	>80	560 lm	White	115°	8 N
LHEAOP6PZ1W015	15 W	≥0.9	<10%	5700 K	>80	1200 lm	White	115°	6 N
LHEAOP7PZ1W015	15 W	≥0.9	<10%	5700 K	>80	1200 lm	White	115°	6 N
LHEAPP6PZ1W015	15 W	≥0.9	<10%	4000 K	>80	1200 lm	White	115°	6 N
LHEAPP7PZ1W015	15 W	≥0.9	<10%	4000 K	>80	1200 lm	White	115°	12 N
LHEBAPP5PZ1W015	15 W	≥0.9	<10%	3000 K	>80	1200 lm	White	115°	12 N
LHEBAOP5PZ1W015	15 W	≥0.9	<10%	3000 K	>80	1200 lm	White	115°	12 N
LHEAOP6PZ1W022	22 W	≥0.9	<10%	5700 K	>80	1760 lm	White	115°	8 N
LHEAOP7PZ1W022	22 W	≥0.9	<10%	5700 K	>80	1760 lm	White	115°	8 N
LHEAPP6PZ1W022	22 W	≥0.9	<10%	4000 K	>80	1760 lm	White	115°	8 N
LHEAPP7PZ1W022	22 W	≥0.9	<10%	4000 K	>80	1760 lm	White	115°	6 N
LHEBAPP5PZ1W022	22 W	≥0.9	<10%	3000 K	>80	1760 lm	White	115°	6 N
LHEBAOP5PZ1W022	22 W	≥0.9	<10%	3000 K	>80	1760 lm	White	115°	6 N

All fixtures are suitable for 240 V.

TECHNICAL DRAWING

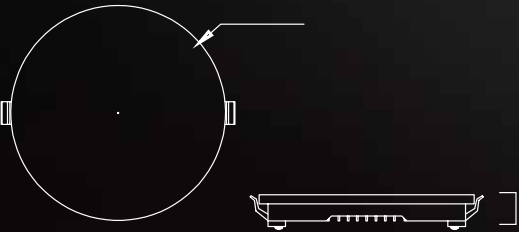

DIMENSION

System Power (W)	ø	Height (h)	Cutout Size
8 W	96 mm	22 mm	88 mm
15 W	153 mm	22 mm	145 mm
22 W	185 mm	22 mm	178 mm

All dimensions are in mm | Tolerance: ± 2 mm



Premium category of LED Panel with anti glare acrylic diffuser which emits light from rim enhancing ceiling aesthetics. Its great colour and light quality adds value to your home décor.



PRICE LIST

Ordering code	Product description	Master Packing (No. of Unit/s)	Tenner Packing (No. of Unit/s)	MRP Rs. ₹ Per Unit (Incl. of all taxes)
LHEEAHPAPG1K007	LED Arica 7.5 W 2700 K BLK	24 N	12 N	₹ 1700.00
LHEEAHPDPG1K007	LED Arcia 7.5 W 4000 K BLK	24 N	12 N	₹ 1700.00
LHEEAHPBPG1W007	LED Arica 7.5 W 2700 K WHT	24 N	12 N	₹ 1700.00
LHEEAHPDPG1W007	LED Arcia 7.5 W 4000 K WHT	24 N	12 N	₹ 1700.00
LHEEAHPAPG1K012	LED Arica 13 W 2700 K BLK	24 N	8 N	₹ 2200.00
LHEEAHPDPG1K012	LED Arcia 13 W 4000 K BLK	24 N	8 N	₹ 2200.00
LHEEAHPBPG1W012	LED Arica 13 W 2700 K WHT	24 N	8 N	₹ 2200.00
LHEEAHPDPG1W012	LED Arcia 13 W 4000 K WHT	24 N	8 N	₹ 2200.00
LHEEAIPBPG1K007	LED Azar 7.5 W 2700 K BLK	24 N	12 N	₹ 1900.00
LHEEAIPDPG1K007	LED Azar 7.5 W 4000 K BLK	24 N	12 N	₹ 1900.00
LHEEAIPBPG1W007	LED Azar 7.5 W 2700 K WHT	24 N	12 N	₹ 1900.00
LHEEAIPDPG1W007	LED Azar 7.5 W 4000 K WHT	24 N	12 N	₹ 1900.00
LHEEAJPBPG1K012	LED Empiria 13 W 2700 K BLK	24 N	8 N	₹ 2300.00
LHEEAJPDPG1K012	LED Empiria 13 W 4000 K BLK	24 N	8 N	₹ 2300.00
LHEEAJPBPG1W012	LED Empiria 13 W 2700 K WHT	24 N	8 N	₹ 2300.00
LHEEAJPDPG1W012	LED Empiria 13 W 4000 K WHT	24 N	8 N	₹ 2300.00
LHEBAFPAIE1K007	LED Azstro Downlight 7.5 W 2700 K	48 N	12 N	₹ 1600.00
LHEBAFPDIE1K007	LED Azstro Downlight 7.5 W 4000 K	48 N	12 N	₹ 1600.00
LHEBAFPAIE1K015	LED Azstro Downlight 15 W 2700 K	24 N	8 N	₹ 2400.00
LHEBAFPDIE1K015	LED Azstro Downlight 15 W 4000 K	24 N	8 N	₹ 2400.00
LHEBAFPAIE1K020	LED Azstro Downlight 20 W 2700 K	24 N	8 N	₹ 2900.00
LHEBAFPDIE1K020	LED Azstro Downlight 20 W 4000 K	24 N	8 N	₹ 2900.00
LSSLNW0173	Azstro Ring attachment 7.5 W White	60 N	6 N	₹ 95.00
LSSLNA0017	Azstro Ring attachment 7.5 W Copper	60 N	6 N	₹ 110.00
LSSLNY0017	Azstro Ring attachment 7.5 W Gold	60 N	6 N	₹ 110.00
LSSLNW0174	Azstro Ring attachment 15 W White	60 N	6 N	₹ 195.00
LSSLNA0018	Azstro Ring attachment 15 W Copper	60 N	6 N	₹ 215.00
LSSLNY0018	Azstro Ring attachment 15 W Gold	60 N	6 N	₹ 215.00
LSSLNW0175	Azstro Ring attachment 20 W White	60 N	6 N	₹ 270.00
LSSLNA0019	Azstro Ring attachment 20 W Copper	60 N	6 N	₹ 285.00
LSSLNY0019	Azstro Ring attachment 20 W Gold	60 N	6 N	₹ 285.00
LHEBAFPBPB1J7X5	LED Azstro COB Module GRY 7.5 W 3000 K	24 N	12 N	₹ 1392.00
LHEBAFPDPB1J7X5	LED Azstro COB Module GRY 7.5 W 4000 K	24 N	12 N	₹ 1392.00
LHEBAFPBPZ1J013	LED Azstro COB Module GRY 13 W 3000 K	24 N	8 N	₹ 1925.00
LHEBAFPDPZ1J013	LED Azstro COB Module GRY 13 W 4000 K	24 N	8 N	₹ 1925.00
LSSLNW0218	LED Dimmable DRIVER 7.5 W*	60 N	12 N	₹ 677.00
LSSLNW0220	LED Non-Dimmable DRIVER 7.5 W	60 N	12 N	₹ 198.00
LSSLNW0219	LED Dimmable DRIVER 13 W*	60 N	12 N	₹ 733.00
LSSLNW0221	LED Non-Dimmable DRIVER 13 W	60 N	12 N	₹ 253.00
LSSLNB0036	Azstro Module Ring 7.5 W Fixed BLK	24 N	24 N	₹ 110.00
LSSLNW0214	Azstro Module Ring 7.5 W Fixed WHT	24 N	24 N	₹ 110.00
LSSLNW0215	Azstro Module Ring 7.5 W Swivel BLK	24 N	24 N	₹ 132.00
LSSLNB0037	Azstro Module Ring 7.5 W Swivel WHT	24 N	24 N	₹ 132.00
LSSLNB0038	Azstro Module Ring 13 W Fixed BLK	60 N	24 N	₹ 220.00
LSSLNW0216	Azstro Module Ring 13 W Fixed WHT	60 N	24 N	₹ 220.00
LSSLNB0039	Azstro Module Ring 13 W Swivel BLK	60 N	24 N	₹ 242.00
LSSLNW0217	Azstro Module Ring 13 W Swivel WHT	60 N	24 N	₹ 242.00

Ordering code	Product description	Master Packing (No. of Unit/s)	Tenner Packing (No. of Unit/s)	MRP Rs. ₹ Per Unit (Incl. of all taxes)
LHEEAKPDIE1W007	LED Floures Surface Spot WHT 7 W 4000 K	24 N	12 N	₹ 1500.00
LHEEAKPDIE1K007	LED Floures Surface spot BLK 7 W 4000 K	24 N	12 N	₹ 1500.00
LHEEAKPDIE1H007	LED Floures Surface Spot BRZ 7 W 4000 K	24 N	12 N	₹ 1500.00
LHEEAKPDIE1T007	LED Fl'oures Surface Spot ABR 7 W 4000 K	24 N	12 N	₹ 1500.00
LHEEAKPDIE1K012	LED Floures Surface Spot BLK 12 W 4000 K	24 N	12 N	₹ 2100.00
LHEEAKPDIE1W012	LED Floures Surface Spot WHT 12 W 4000 K	24 N	12 N	₹ 2100.00
LHEEAKPDIE1K018	LED Floures Surface Spot BLK 18 W 4000 K	24 N	8 N	₹ 2900.00
LHEEAKPDIE1W018	LED Floures Surface Spot WHT 18 W 4000 K	24 N	8 N	₹ 2900.00
LHEEAFPDIG1K005	LED Unispot Round BLK 5 W 4000 K	24 N	8 N	₹ 2500.00
LHEEAFPLIG1K010	LED Duospot Round BLK 10 W 4000 K	24 N	8 N	₹ 3500.00
LHEEAFPDIG1W005	LED Unispot Round WHT 5 W 4000 K	24 N	8 N	₹ 2500.00
LHEEAFPLIG1W010	LED Duospot Round WHT 10 W 4000 K	24 N	8 N	₹ 3500.00
LHEBAPP5PZ1W008	LED Luminato Recess Panel RD 8 W 3000 K	24 N	12 N	₹ 1045.00
LHEAPP7PZ1W008	LED Luminato Recess Panel RD 8 W 4000 K	24 N	12 N	₹ 1045.00
LHEAOP7PZ1W008	LED Luminato Recess Panel RD 8 W 6500 K	24 N	12 N	₹ 1045.00
LHEBAOP5PZ1W008	LED Luminato Recess Panel SQ 8 W 3000 K	24 N	12 N	₹ 1045.00
LHEAPP6PZ1W008	LED Luminato Recess Panel SQ 8 W 4000 K	24 N	12 N	₹ 1045.00
LHEAOP6PZ1W008	LED Luminato Recess Panel SQ 8 W 6500 K	24 N	12 N	₹ 1045.00
LHEBAOP5PZ1W015	LED Luminato Recess Panel RD 15 W 3000 K	24 N	8 N	₹ 1430.00
LHEAPP7PZ1W015	LED Luminato Recess Panel RD 15 W 4000 K	24 N	8 N	₹ 1430.00
LHEAOP7PZ1W015	LED Luminato Recess Panel RD 15 W 6500 K	24 N	8 N	₹ 1430.00
LHEBAPP5PZ1W015	LED Luminato Recess Panel SQ 15 W 3000 K	24 N	8 N	₹ 1430.00
LHEAPP6PZ1W015	LED Luminato Recess Panel SQ 15 W 4000 K	24 N	8 N	₹ 1430.00
LHEAOP6PZ1W015	LED Luminato Recess Panel SQ 15 W 6500 K	24 N	8 N	₹ 1430.00
LHEBAOP5PZ1W022	LED Luminato Recess Panel RD 22 W 3000 K	24 N	6 N	₹ 2090.00
LHEAPP7PZ1W022	LED Luminato Recess Panel RD 22 W 4000 K	24 N	6 N	₹ 2090.00
LHEAOP7PZ1W022	LED Luminato Recess Panel RD 22 W 6500 K	24 N	6 N	₹ 2090.00
LHEBAPP5PZ1W022	LED Luminato Recess Panel SQ 22 W 3000 K	24 N	6 N	₹ 2090.00
LHEAPP6PZ1W022	LED Luminato Recess Panel SQ 22 W 4000 K	24 N	6 N	₹ 2090.00
LHEAOP6PZ1W022	LED Luminato Recess Panel SQ 22 W 6500 K	24 N	6 N	₹ 2090.00



Maximum retail price is inclusive of all taxes



Havells India Ltd.

Corp Office: QRG Towers, 2D, Sector-126, Expressway, Noida-201304 (U.P), Ph. +91-120-3331000

Email: marketing@havells.com, www.havells.com

Consumer Care No.: 08045 77 1313 (All Connections), 011-4166 0303 (Landline)

Join us on Facebook at www.facebook.com/havells and share your ways to save planet!

CIN - L31900DL1983PLC016304.

Scan the QR Code
to download
Havells mCatalogue



Actual products may vary in colour, design, description and colour combination etc.
Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication. Specifications & performance data are constantly changing. Current details should therefore be checked with Havells Group.
Copyright Subsists. Imitation of trade dress, graphics and color scheme of this document is a punishable offence.
